

# CITY OF GRASS VALLEY PUBLIC WORKS DEPARTMENT ENGINEERING DIVISION

# REQUEST FOR QUALIFICATIONS AND REQUESTS FOR PROPOSALS FOR DESIGN-BUILD SERVICES

### **FOR**

DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT PROJECT NO. 21-12

# DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT PROJECT NO. 21-12



## Issued by:

Bjorn P. Jones, PE

Assistant City Engineer

Date

#### The following items are included in this RFQ/RFP packet:

I.	GENERAL INFO	RMATION	1
II.	PROJECT OVER	RVIEW / GENERAL INFORMATION	4
III.	PROCUREMENT	T INFORMATION	10
IV.	SUBMITTAL REC	QUIREMENTS AND EVALUATION CRITERIA	12
V.	EVALUATION A	ND RANKING PROPOSALS	19
VI.	SELECTION PRO	OCEDURE	21
VII.	TERMS AND CO	ONDITIONS	22
EX	HIBITS		
EXH	HIBIT 2 - PROJE	EPTUAL PROJECT PLANS ECT RENDERINGS ECT COMPONENTS	
EXI	HIBIT 4 - FISCA	L RECOVERY GRANT FUND TERMS AND CONDITIONS OF GRASS VALLEY DESIGN BUILD CONTRACT	
EXH	HIBIT 7 – ACKNO	OWLEDGMENTS AND QUALIFICATIONS FOR DESIGN BUIL OSAL AND BIDDER'S CERTIFICATES FOR DESIGN BUILD S	

#### CITY OF GRASS VALLEY

#### DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT

#### PROJECT NO. 21-12

#### **DESIGN-BUILD PROJECT RFQ AND RFP**

#### I. GENERAL INFORMATION

#### A. GENERAL

The City of Grass Valley (City) is requesting sealed Statements of Qualifications (SOQ's) and Proposals (collectively referenced herein as "Proposal") from qualified Design-Build Teams interested in providing professional engineering and construction services for the City's DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT. The project will consist of finalizing the design and enacting improvements to transform Mill Street from Neal to West Main Street to create a town square atmosphere, improving accessibility and pedestrian friendliness, and encouraging use of the right of way for dining and entertainment.

All proposals must be received by the City of Grass Valley Engineering Division prior to 3:30 p.m. local time February 8, 2022 at the City Hall. Proposals received after said time will not be considered. To guard against premature opening, each proposal shall be submitted in a sealed package plainly marked as described below.

#### **B. PREPROPOSAL CONFERENCE**

An optional pre-proposal conference will be held beginning at City Hall, located at 125 East Main Street in Grass Valley, CA on January 6, 2022 at 11:00 AM. The pre-proposal conference shall explore the project site and field questions related to the construction plans, methods, and specifications. City Staff will be present to answer questions regarding the Proposal. Pertinent information discussed at the meeting, answers to questions received and any bid document updates emerging from meeting dialogues will be distributed through addendum. There will be no job walks or conferences given at any other time than the time specified above.

#### C. PROPOSAL SUBMISSION AND DEADLINE

Proposals shall be submitted with all documents required and properly signed by the Proposer. Proposals shall be delivered plainly marked, as follows:

CITY OF GRASS VALLEY – DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT DESIGN-BUILD SERVICES STATEMENT OF QUALIFICATIONS AND PROPOSAL DESIGN-BUILD TEAM'S NAME DESIGN-BUILD TEAM'S ADDRESS DESIGN-BUILD TEAM'S PRIMARY CONTACT PERSION, PHONE NUMBER, & EMAIL ADDRESS

The proposer's cost of services shall be submitted in a separate sealed envelope, with the firm's name and address along with the following title: Proposal and Bidder's Certificates. A schedule of values must be included with the overall project cost as directed elsewhere in this RFQ/RFP.

Proposals may be mailed, or hand delivered to:

Grass Valley City Hall Attn: Engineering Division City of Grass Valley 125 East Main Street, Grass Valley, CA 95945

Each Proposer shall carefully examine each term of this Request for Proposals; and each Proposer shall judge all the circumstances and conditions affecting his/her proposal. Failure on the part of any Proposer to make such examination and to investigate thoroughly shall not be grounds for any declaration that the Proposer did not understand the conditions of this Request for Proposal. Any proposal received after the date and time specified above shall not be considered.

The Proposer shall comply with all federal, state or local laws which apply to the services and products herein specified.

Submitting firms must have the ability to provide the full-range of services, or to team with subcontractors necessary, to complete the design and construction phases of each component of the overall DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT described in this RFQ/RFP.

Proposers will submit **three (3) printed copies** of their technical proposal marked clearly as previously described; **one (1) printed copy** of the proposal and bidder's certificates, including cost of services breakdown (under sealed cover); and **one (1) electronic copy** of the entire proposal package (technical proposal and proposal documents), in fully searchable pdf format on a USB drive. Each proposal must contain the sections as detailed in this RFQ/RFP.

This solicitation for proposals does not commit the City of Grass Valley to enter into a Contract. The City of Grass Valley reserves the right to accept or reject any proposals, and to negotiate with any qualified source, or to cancel in part or in its entirety this Request for Proposals. It may accept the proposal that it considers to be in the interest of the City of Grass Valley, with or without negotiation.

The City reserves the right to waive any informality or minor irregularity when it is in the best interest of the City to do so, to negotiate for the modification of any proposal with mutual consent of the Proposer, to re-advertise for proposals if desired, and to accept the proposal which in the judgment of the City, even though it does not offer the lowest cost, is nevertheless deemed to offer the best value for the public and City. Any proposal which is incomplete, conditional, obscure, or which contains irregularities of any kind, may be cause for rejection.

#### D. INQUIERES / QUESTIONS

The proposer shall carefully examine this RFQ/RFP and any addenda that may be posted on the City's website: www.cityofgrassvalley.com.

The proposer shall seek clarification of any ambiguity, conflict, omission or other error in this RFQ/RFP, in writing. If the answer materially affects the RFQ/RFP, the information will be incorporated into an addendum and distributed to all Proposers via the City's website. All addenda will be numbered in sequence, dated as of the date of issue, and posted. It shall be the Proposer's responsibility to check the City's website to determine if any addenda have been posted prior to the submittal deadline.

No interpretations of the meaning of the RFQ/RFP proposal documents will be made orally. All questions concerning this project shall be provided in writing according to the following Procurement Schedule. All questions must be received by the City, in a manner described below.

Emailed: To the attention of the Catharine Dykes, at: catharined@cityofgrassvalley.com

Mailed: City of Grass Valley, Engineering Division

Attn: Catharine Dykes, Project Manager

#### 125 East Main Street, Grass Valley, CA 95945

Questions may only be submitted to the City's Project Manager until 3:30 PM on January 21, 2022. All questions will be answered and posted to the website by January 26, 2022.

#### E. DBE GOOD FAITH EFFORT REQUIRMENTS

Bidders are urged to obtain DBE participation on this project, although there are no specific goals for DBE participation.

#### II. PROJECT OVERVIEW / GENERAL INFORMATION

#### A. CITY OF GRASS VALLEY

The City of Grass Valley (City) is seeking to transform Mill Street (from Neal to West Main Street) and portions of Main Street (from Church Street to Ricardson Street) to create a pedestrian friendly, town square atmosphere, allowing restaurants and retail businesses to expand operations into the city right of way. The design should enable flexibility for businesses by creating enticing public seating areas and unique outdoor entertainment and retail spaces. The proposed improvements should prioritize openness, with a cohesive ground plane that uses materials authentic to the historic character of Grass Valley and maintains visibility of the historic building frontage skyline.

Some of the significant project elements will include; improved accessibility through construction of a permeable brick paver system from sidewalk to sidewalk along the closed section of Mill Street; fire lane access through the closed portion of Mill St (minimum 15 feet wide), state of art sound system, underdrain system for storm drainage, delivery truck access, street light replacement, utility relocations, waterline replacement, irrigation, and public space enhancements including, steel planters, patio/parklet railings, brick/stone pavers, historic pole-mounted street lights, landscaping, and tree up lighting, amongst other items, as shown on the Conceptual plans for the project.

Construction activities for this project shall minimize the impact to stores/businesses and public by limiting construction activities to non-businesses hours for the vast majority of the project. This would also include keeping the existing paved sections of Mill Street open to the public and delivery vehicles during normal businesses hours whenever possible.

#### **B. PROJECT FUNDING**

The City has acquired federal grant funding from the American Rescue Plan Act (ARPA) to be used as the primary funding source for the project. Local City Water, General and Measure E funds will be used as supplemental funding as necessary. Due to ARPA being a federal program, the design-build services must comply with all applicable federal statues, regulations, and executive orders associated with the American Rescue Plan Act (ARPA). Specific federal requirements will be incorporated into the Design-Build Contract.

#### C. PROJECT OVERVIEW

Detailed project descriptions are included in the exhibits. This section provides a brief project overview.

The intent of this project is to provide the City with a means to offset the fiscal impacts of COVID-19 restrictions on businesses and restaurants in our downtown by providing a unique and appealing public space; attracting patrons through enhancing walkability, outdoor entertainment and dining opportunities and retail sales areas.

The City has identified three primary project components to be included within the overall DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT; The Mill Street streetscape improvements, The Main Street streetscape improvements, and the water line replacement work. The City will solicit Design-Build services for all portions of the improvements as individual project components that will be bid as one project and provided by one prime contractor. The RFP will also include an additive bid item (Additive Bid Item A) consisting of the Reconstruction of the Intersection of West Main and Mill Streets. Individual project components and corresponding details are provided in exhibits of this RFQ package.

<sup>&</sup>lt;sup>1</sup> Contractor and Design-Build team are used interchangeably in this document. The prime contractor will be the entity with which a contract is entered with the City.

#### PROJECT COMPONENT 1:

Streetscape Improvements (Mill Street) – Design, survey/map, engineer, public/business coordination, and construct improvements to the portion of Mill Street between Neal and West Main Streets. These improvements shall include permeable brick paver surface between the sidewalks with any underdrain system, surface water drainage system, demo, concrete work, asphalt paving planters, street lights with gas lamp like fixtures, tree up lighting, irrigation system, all weather outdoor sound system with different zones for background music, special events, paging, and announcements, landscaping, string lights, security camera system, utilities conduits (electrical, fiber, irrigation controls, etc.), access controls (bollards or other automated system), street furniture (trash and recycling receptacles, tables, chairs, umbrellas with bases, etc.), decorative fencing, amongst other items detailed in the exhibits.

#### **Project Objectives:**

- Make the historic downtown more cohesive and connected
- Flexibility to support community events for all seasons (power outlets on street light poles, at grade stage areas with power and connection to the outdoor sound system, etc.)
- Maintain Business operations and special events during construction
- Minimize barriers to access so that Mill Street welcomes people of all ages and abilities
- Uniform brick ground plane
- Multifunctional lighting and poles
- Flexible patio areas
- Tree shaded public seating areas
- Provide a fire lane 15 feet minimum through Mill Street that can also be used for commercial delivery of products, parade route, amongst other uses.
- Provide landscaped planters with public seating options (i.e. stacked rock wall planters, raised weathered steel planters with built-in seat, etc.)

#### PROJECT COMPONENT 2:

Streetscape Improvements (Main Street) – Design, survey/map, engineer, public/business coordination, and construct improvements to the portion of Main Street (East & West) between School and Bennett Streets. These improvements shall include demo, concrete work, asphalt paving, parklets for some businesses (including sidewalk modifications), new trees and tree wells, tree up lighting, replacing planters, replace street lights and poles with gas lamp like fixtures, irrigation system modifications, landscaping, street furniture (trash and recycling receptacles, tables, chairs, umbrellas with bases, etc.), parklet decorative fencing, slurry seal and restripe West Main Street from Church Street to Auburn Street, amongst other items detailed in the exhibits.

#### **Project Objectives:**

- Make Main Street more cohesive and connected to downtown
- Flexibility to support community events for all seasons (power outlets on street light poles, etc.)
- Minimize barriers to access for people of all ages and abilities
- Maintain Business operations and special events during construction
- Provide for more loading zones (people and deliveries)
- Multifunctional lighting and poles
- Flexible parklet areas

- Tree shaded areas
- Provide landscaped planters consistent with Mill Street (i.e. stacked rock wall planters, raised weathered steel planters, etc.)

#### PROJECT COMPONENT 3:

Mill Street Waterline Replacement – Design, survey/map, engineer, public/business coordination, and construct improvements associated with replacing the waterline on Mill Street between Neal and West Main Streets. These improvements shall include all piping, valves, tees, service connections (piping between the waterline and the water meter), hydrant lines (up to an including the hydrant valves), trenching, backfill, and all other items required and/or detailed in the exhibits to replace the existing water line while maintaining pedestrian and vehicle access at all times.

#### **Project Objectives:**

- Provide safe drinking water
- Replace an old waterline with water facilities to City's current standards

#### PROJECT COMPONENT (ADDITIVE BID ITEM A):

Streetscape Improvements (Main/Mill Streets Intersection) – Additive Bid Item 1A: Design, survey/map, engineer, public/business coordination, and construct upgrades to the intersection of Mill and West Main Streets. This additive Bid item is limited to paved street reconstruction/vehicle travel way only. All other proposed improvements outside the travel way (i.e. planters, landscaping, irrigation, lighting, etc) would be included in Project Component 1, 2, and/or 3 respectively. The relocation of the clock, signs, street lights due to the proposed new cross walk would be included in the ADDITIVE BID Item A. Any crosswalk extension or associated improvements shall be included in this additive bid item. The scope of work demo of the travel way, installation of new traffic signage, asphalt paving, brick pavers, concrete work, detectable warning surfaces, amongst other items detailed in the exhibits.

The attached plans and exhibits provide further detail regarding the anticipated project components.

The work shall be accomplished in an order that will allow continued operation of all businesses and restaurants, vehicle (delivery and fire truck/emergency) access except for temporary, approved shutdowns. Night work should be considered for as much of the work as possible. Work schedules should be assumed to avoid impacts to businesses and events downtown.

- 1. Review the design examples and conceptual plans
- 2. Review existing site information
- 3. Upon award, determine and provide design schedule of work
- 4. Pothole existing utilities to confirm depths and as-built conditions
- 5. Complete Engineering, Surveying, Mapping, Design and documentation for review and approval of the City. Include project order of work, identifying coordination steps required for maintaining operation of businesses, restaurants, and existing facilities.
- 6. Submit design development and construction documents for review and approval at the 50%, 90% and final completion levels.
- 7. Deliver 50%, 90% and final design documentation stamped by a California Register Engineer for acceptance by the City.

- 8. Obtain, pay for, relocate, and/or construct any all necessary improvements required by permitting agencies, including but not limited to PG&E, AT&T, State of California, City of Grass Valley.
- 9. Schedule construction phases and scope of work to limit disturbance on downtown businesses and events.
- 10. Work with City staff to determine final location of planters, landscaping, site furniture, etc.
- 11. Design water line improvements, drainage improvements, and electrical and lighting systems using suitable engineering and most current standards necessary for modern and functional systems.
- 12. Secure work area and provide for continued access and operability to the public and businesses with close and continual coordination with city staff and businesses owners
- 13. Construct project improvements
- 14. Provide any operation and maintenance manuals
- 15. Provide start-up support
- 16. Provide complete signed and stamped as-built record drawings and specifications of all improvements.

#### D. PROJECT SCOPE

At a minimum the following tasks are anticipated to be included in the scope of work for the selected Design-Build Team:

- Planning: The Design-Build team will coordinate efforts to obtain all necessary permits and documents required for construction (traffic control, environmental permitting, building permits, pedestrian control plans, utility, etc.) prior to commencing construction activities. The planning phase of the project will also include review of existing facilities, this effort will be coordinated with City staff.
- 2. Project Management: Develop and implement a project design management strategy in accordance with the standard specifications and industry standards of care. At a minimum, tasks will include:
  - a. Conduct a project team kick-off meeting
  - b. Conduct weekly construction meetings
  - c. Maintain a project design and construction schedule. The initial project schedule shall be prepared prior to the project team kick-off meeting and presented at that meeting
  - d. Identify timing and constructability issues and provide preliminary construction sequence
  - e. Provide progress reports
  - f. Develop a bid quantity and itemized costs for each of the individual project components, i.e. detailed schedule of values.
  - g. Prepare and distribute meeting agendas and minutes
  - h. Preparation of monthly billing statements
- 3. Design: The Design-Build team will produce design drawings and specifications required for construction of each project component. The specific requirements for design documents and submittals are included within each project information packet (see appendix); however, these packages only provide the framework for the project requirements. The Design-Build team shall also adhere to the industry standard of care for such public facilities, and provide specifications and details in addition to those presented in the attached project packages (exhibits) for a fully complete and operable final facility. The selected Team shall also produce As-Built documents that show all improvements, including drawings, specifications, operation and maintenance manuals, submittals and programming documentation with English language interpretations.

- 4. Permitting: The contractor will obtain any and all permits required for this project. The City will complete the environmental documentation for the project (CEQA).
- 5. Quality Assurance/Quality Control: Material/quality control inspection and testing will be provided by the Contractor. The Contractor will be required to re-do all work that does not meet the design intent identified in the approved design, specifications and drawings at no additional cost to the City, unless otherwise accepted by the City. The Contractor will be responsible for ensuring quality control of its crews and sub-contractors during construction.

The Design-Build team will include a special inspector as necessary to monitor and document all work progress and ensure construction compliance with approved plan and design documents. The inspector will submit all findings, daily reports, and documentation of the project progress and monitoring to the City, including early identification of any specific issues or compliance concerns to the City.

- 6. Construction Management: The Design-Build team shall identify timing and constructability issues to the City and provide a preliminary proposed construction sequence.
- 7. Construction: Construction and other required work for each individual project component will be performed by the Design-Build team.
- 8. Testing: Testing requirements for each project component are described within the individual project information exhibits. Tests will be the responsibility of the Contractor. All testing will be performed per the most recent, appropriate standards. The Design-Build team inspector will monitor all facility tests, and a minimum of three (3) days' notice will be provided to the City such that the City can arrange their own observation of the Contractor tests. Any test that effects the operation and maintenance of the Wastewater Treatment Plant must be approved in advance by the City.
- Disposal/Recycling: Waste asphalt concrete pavement, Portland cement concrete and other debris and waste products produced during construction will be disposed of or recycled appropriately by the Contractor.
- 10. Start-up and Operator Training: The Contractor will be required to provide training for City personnel in the proper operation and maintenance of the equipment and systems installed under this contract. All costs for training will be the responsibility of the Contractor.

#### E. PROJECT BUDGET

The Guaranteed Maximum Price (GMP) Design-Build budget for this project will be \$4,200,000. The GMP shall include all design and construction costs, contingencies, indirect and reimbursable expenses, taxes and fees to complete the project. This is the limit of the available project funding for the Design-Build team.

#### F. FUNDING REQUIREMENTS

The Project, and the Design-Build Team, will be required to meet the requirements of all Project funding sources. Due to American Rescue Plan Act (ARPA) funds being used on this project, the design-build team will need to comply with specific federal requirements, which will be incorporated into the Design-Build Contract. This will include, by is not limited to, the following specific provisions of federal law:

1. Uniform Administrative Requirements, Cost Principles, and Audit Requirements for Federal Awards, 2 C.F.R. Part 200, with limited exception.

- 2. Universal Identifier and System for Award Management (SAM), 2 C.F.R. Part 25, pursuant to which the award term set forth in Appendix A to 2 C.F.R. Part 25.
- 3. Reporting Subaward and Executive Compensation Information, 2 C.F.R. Part 170, pursuant to which the award term set forth in Appendix A to 2 C.F.R. Part 170.
- 4. OMB Guidelines to Agencies on Governmentwide Debarment and Suspension (Nonprocurement), 2 C.F.R. Part 180, including the requirement to include a term or condition in all lower tier covered transactions (contracts and subcontracts described in 2 C.F.R. Part 180, subpart B) that the award is subject to 2 C.F.R. Part 180 and Treasury's implementing regulation at 31 C.F.R. Part 19.
- 5. Recipient Integrity and Performance Matters, pursuant to which the award term set forth in 2 C.F.R. Part 200, Appendix XII to Part 200.
- 6. Governmentwide Requirements for Drug-Free Workplace, 31 C.F.R. Part 20.
- 7. Restrictions on Lobbying, 31 C.F.R. Part 21.
- 8. Uniform Relocation Assistance and Real Property Acquisitions Act of 1970 (42 U.S.C. §§ 4601-4655) and implementing regulations.
- 9. Generally applicable federal environmental laws and regulations.

#### G. SCHEDULE

The City desires to execute the Design-Build agreement by March 8, 2022. The goal is to have the design, permitting, and construction of the project completed by Fall 2022. Coordinating work activities to limit the impact of construction on restaurants/businesses/stores and public is a top priority.

See the next section for details on the procurement schedule.

#### H. REFERENCE DOCUMENTS

Reference documents are included in the attached exhibits, including the terms and conditions of the funding agreement, which the Proposer must adhere to.

#### III. PROCUREMENT INFORMATION

#### A. PROCUREMENT SCHEDULE

The procurement schedule for the Design-Build Services is as follows:

Task	Date
Issue Request for Qualifications (RFQ) & Proposals	December 7, 2021
Pre-Proposal Conference	11:00 AM January 6, 2022
Deadline for Questions and Clarifications	January 21, 2022
Responses and Addenda Posted	January 26, 2022
Statements of Qualification and Proposal Due	3:30 PM February 8, 2022
Interview Teams (Optional)	February 17, 2022 (Tentative)
Award of Contract	February 22, 2022 (Tentative)
City Issues Notice to Proceed (NTP)	March 8, 2022 (Tentative)
Project Kick-Off Meeting	Within 10 working days of NTP
Design Completion Period	Within 45 working days of NTP
Construction Completion	120 working days from NTP
Performance Guarantee Period	One Year from Final Acceptance

#### B. PROPOSAL DOCUMENT OWNERSHIP AND CONFIDENTIALITY

All submitted proposal documents will become the property of the City, and the City reserves the right to use proposal materials at its sole discretion. Proposal documents are subject to public inspection and disclosure under the California Public Records Act, except for any financial statements or proprietary information. You may mark information contained in the proposal you believe contains proprietary information. However, the City will make the final determination on whether any requested content to be withheld from public records is exempt.

#### C. CITY RIGHTS

The City reserves the right to:

- Terminate the RFQ/RFP process at any time
- Re-issue the RFQ/RFP if the City determines the SOQ/proposals received are non-responsive or the public interest is best served by reissuance
- Not conduct interviews for the shortlist process
- Modify the number of shortlisted teams
- Add or remove project components throughout the RFQ/RFP process

#### D. OVERVIEW OF THE PROJECT DELIVERY PROCESS

The City's procurement process for the Project will follows the steps listed below:

- 1. Request for Design-Build Team Qualifications (RFQ) and proposals (RFP)
- 2. SOQ and proposal review process
- 3. Firm interviews (optional)
- 4. Firm recommendation
- 5. In-person meetings and negotiations as necessary
- 6. Submittal of final price proposals
- 7. Recommendation to City Council for selection
- 8. Execution of design-build agreement

#### E. OBLIGATION TO KEEP PROJECT TEAM INTACT

The Design-Build Team shall make every effort to keep the Key Team Members identified in the Design-Build Team's proposal forms intact throughout the project procurement and execution process. If a Key Team Member changes at any time during the procurement process, the Design-Build Team shall submit a formal request to change the Key Team Member and provide qualifications of the new Key Team Member proposed. The City reserves the right to reject the proposed Key Team Member, and the City may disqualify a team from consideration if the Key Team Member change is determined to be not equal from the original team proposed.

#### F. SKILLED AND TRAINED WORKFORCE COMMITMENT

The Design-Build entity shall provide an enforceable commitment to the City that the entity and its subcontractors at every tier will use a skilled and trained workforce to perform all work on the project or contract that falls within an apprenticable occupation in the building and construction trades.

#### G. EXAMINATION REQUIREMENTS

Each Design-Build Team shall carefully examine the requirements of this RFQ/RFP. Each Design-Build Team shall meet all terms and conditions of the RFQ. By submitting a proposal, the Design-Build Team acknowledges acceptance of all provisions of the RFQ/RFP.

#### IV. SUBMITTAL REQUIREMENTS AND EVALUATION CRITERIA

#### A. SOQ SUBMITTAL DEADLINE AND LOCATION

See RFQ/RFP Section I for submittal date and location requirements. SOQs received after the deadline will not be considered.

#### **B. PROPOSAL ORGANIZATION**

The Proposer shall provide information in accordance with the format requirements set forth in this section. Proposal information shall be provided in the following sections:

- Section 1: Acknowledgements and Qualifications
- Section 2: Technical Approach
- Section 3: Proposal

Proposers shall submit their Proposals in sealed boxes or envelopes. Sections 1 and 2 shall be combined into a single bound document. Section 3, Proposal, shall be submitted separately under sealed cover.

Supplemental Project-specific technical information such as design calculations, reference tables, and charts may be used to facilitate Proposal presentation. Supplemental information to each section of the Proposal may be bound with the associated section, bound separately or bound together with other supplemental information.

Narrative pages shall be 8-½ inches by 11 inches and shall be bound. The font shall be 12-point Times-New Roman or equivalent. Single line spacing is required for text. A clear and concise presentation of information is encouraged.

Proposals shall be in the English language and units of measurement shall be those used in the United States. Proposers shall incorporate graphics (e.g., diagrams and drawings) as necessary to clearly present their Proposals. Sales brochures are not desired unless directly related to the Proposal and referenced in the text. Audiovisual materials will not be accepted. The maximum number of pages that the Proposal shall contain is 50 (excluding attachments and exhibit forms).

#### C. PROPOSAL CONTENT

The Proposer shall provide the appropriate information in accordance with the content requirements set forth in the following Sections and exhibits, and with the format requirements set forth in this section. Proposers are advised that, if selected, information contained in portions of Proposal will be included in or integrated into the Contract.

All SOQ/RFP materials and exhibits shall be reviewed and adhered to in the preparation of the Proposal for the DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT; however, Exhibits 7 and 8, and the following material and format shall specifically be completed as the formal Statement of Qualifications and Proposal for submission to the City. Any exceptions to the contract or proposed scope of work must be explicitly stated and explained. The selected Proposer will be required to comply fully with the contract and its exhibits.

#### STATEMENT OF QUALIFICATIONS

#### Section 1 – Acknowledgements and Qualifications (including Exhibit 7)

- 1.1. Proposal Transmittal Letter
- 1.2. Design-Build Team Standard Questionnaire
- 1.3. Project Team Profile
- 1.4. Key Project Staff
- 1.5. Experience and Reference Projects

#### Section 2 – Technical Approach

- 2.1. Problem Statement/Scope of Work
- 2.2. Project Management and Partnering
- 2.3. Project Approach
- 2.4. Project Schedule
- 2.5. Drawings and Diagrams (optional)

#### **PROPOSAL**

#### Section 3 – Proposal (including Exhibit 8)

- 3.1. Proposal Forms and Bidders Certificates
- 3.2. Schedule of Values

#### D. SECTION 1: ACKNOWLEDGEMENTS AND QUALIFICATIONS

Each Proposer shall fully complete the forms and attachments in accordance with this section, which demonstrates to the City the Proposer's agreement to be bound by the requirements of the RFQ/RFP and demonstrates that the Proposer's technical experience and qualifications are suited to undertake the project.

#### SECTION 1.1. PROPOSAL TRANSMITTAL LETTER

One fully executed Proposal Transmittal Letter (See Exhibit 7, Section 1.1) shall be submitted from the Proposer, acknowledging, among other things, that the Proposer has completely reviewed and understands and agrees to be bound by the requirements of this RFQ/RFP.

The Proposal Transmittal Letter and all attachments thereto must be signed by a representative of the Proposer who is empowered to sign it and to commit the Proposer to the obligations contained in the Proposal. If the Proposer is a partnership, the Proposal shall be signed by one or more of the general partners. If the Proposer is a corporation, an authorized officer shall sign his or her name and indicate his or her title beneath the full corporate name. Anyone signing the Proposal as an agent must file with it legal evidence of his or her authority to execute such Proposal. The Proposal Transmittal Letter shall include the following attachments:

Proposal Transmittal Letter Attachment 1 – California Licenses and Certificates or Registrations

The final Contract will incorporate the Proposal Transmittal Letter, attachments and other parts of the proposal as exhibits. The Engineer of Record must be given responsible charge for the engineering design work and shall be licensed in the State of California. Provide proof of [or a copy of] the current registration for all such professional engineer(s). Proposers shall confirm that each team member listed the attachment to the Proposal Transmittal Letter is appropriately licensed or registered in California to perform the Work. These licenses and certificates of registration shall also include, but not be limited to, the following:

- A copy of the State of California Professional Engineer Certificate of Registration for the responsible person in charge of the Work to be completed by the Engineer of Record.
- All California construction license numbers, classifications and expiration dates of the California contractor licenses held by the Proposer team's contractor.

#### SECTION 1.2. DESIGN BUILD TEAM STANDARD QUESTIONAIRRE

Proposers shall submit a fully completed Design Build Team Standard Questionnaire (See Exhibit 7, Section 1.2). The Questionnaire will be used to determine whether a Proposer meets the minimum qualifications necessary to be considered for award of the Contract.

#### SECTION 1.3. PROJECT TEAM PROFILE

A complete project team profile of the proposer's Design-Build team shall be submitted on the form, Project Team Profile, found in Exhibit 7. Proposers shall demonstrate their ability to undertake the Project by providing the technical experience and qualifications of the Proposer, its Significant Subcontractors, any additional team members with key experience related to the Project, and individual team members related to the design, construction, startup, and testing.

Proposers must provide a history of their Design-Build Team and its experience in designing and constructing public works projects similar to the DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT. If the proposing firm will be offering certain elements of the project through a subcontractor(s), sufficient information and data with respect to each subcontractor must be provided to demonstrate that it has the requisite experience to perform the function assigned by the Proposer. The city recognizes that because the design-build contract will be awarded prior to the completion of the design, it may be impractical for the design-build entity to list all subcontractors at the time of the award. Therefore, the following requirements will apply to subcontractors, licensed by the state, that are employed on the project:

- Proposers shall specify the construction trades or types of subcontractors that may be named as members of the design-build entity at the time of award. In selecting the trades that may be identified as members of the design-build entity, the design-build entity shall identify the trades deemed essential in the design considerations of the project.
- 2. All subcontracts not listed by the design-build entity at the time of award shall be performed and awarded by the design-build entity in accordance with a bidding process set forth in the design-build agreement.
- 3. In a contract between the successful Proposer and a subcontractor, and in a contract and any subcontractor thereunder, the percentage of the retention proceeds withheld may not exceed the percentage specified in the contract between the city and the design-build entity. If the design-build entity provides written notice to any subcontractor who is not a member of the design-build entity, prior to or at the time that the bid is requested, that a bond may be required and the subcontractor subsequently is unable or refuses to furnish a bond to the design-build entity, then the design build entity may withhold retention proceeds in excess of the percentage specified in the contract between the city and the design-build entity from any payment made by the design-build entity to the subcontractor.

The Proposer shall provide its individual member and collective design and construction experience, as well as equivalent information for the septage and debris facilities.

The Proposal shall indicate the type of firm or organization (corporation, partnership, joint venture, etc.) that will serve as the contracting party, and provide single-entity responsibility for the Project. If the Proposer is a partnership, joint venture, or consortium, all members of the Proposer shall be listed. A Project organization chart is required. The Proposal shall identify the portions of the Project that will be undertaken directly by the Proposer and what portions of the Project will be subcontracted and to which firms. At a minimum, the Proposal shall identify the parties that will undertake the responsibilities for design, obtaining construction-related permits, construction, testing, and project coordination.

The proposed contractual relationships between the Proposer and all major partners and Subcontractors (responsible for greater than 5 percent of the total project effort) relative to the various phases of the project (e.g., design, construction, etc.) shall be described in the Proposal, except as provided above. Suppliers of proprietary or specialty equipment which are expected to be significant to the Proposal should also be identified.

The history, ownership, organization, and background of the Proposer shall be provided. If the Proposer is a joint venture, the required information shall be submitted for each member of the joint venture firm. The Proposer shall describe the history of the relationships among the team members, including a description of past working relationships. If the Proposer or a joint venture member is a subsidiary of a parent company, the Proposer shall state when the subsidiary was formed and its place in the corporate structure of the parent company. If a subsidiary is newly created for the purposes of responding to the RFQ/RFP, the reasons for this action shall be fully disclosed.

#### SECTION 1.4. KEY PROJECT STAFF

A list of key project staff indicating name of individual, and their role shall be submitted on the form found in Exhibit 7.

Key project staff should include, but is not limited to: Project Manager, Project Superintendent, Construction Project Manager, Design Manager, and Engineer of Record

For each key team member, a resume should be attached (two single-sided pages maximum) showing the member's relevant experience and training necessary to support their role in the project.

#### SECTION 1.5. EXPERIENCE AND REFERENCE PROJECTS

The Proposer shall describe up to five of its most recently completed and relevant projects. In addition, the Proposer shall describe the General Contractor member's largest, or most similar, completed design-build projects within the last five years. The projects may be public or private, but preferably located within California. A brief description of these selected projects shall be provided, including the history of operation, current status, and a description of the Proposer team's specific involvement in these projects. Emphasis shall be on experience in communities similar to Grass Valley. In the projects presented, the Proposer must demonstrate qualifications and experience consistent with the development and implementation of the Project. Reference projects shall be submitted on the form, Reference Projects, found in Exhibit 7.

Names and references must be current and verifiable.

#### E. SECTION 2: TECHNICAL APPROACH

This section shall present the Proposer's understanding of the project, i.e. the problem and issues that the project will resolve, and outline the Proposer's approach to implementing the project, from project kick-off through design, construction and completion.

#### SECTION 2.1. PROBLEM STATEMENT / SCOPE OF WORK

This section shall present the proposer's understanding of the problem that the project aims to rectify and outline the proposer's understanding of the scope of work to be completed by the design build team. The benefits of using the Design Build approach should be addressed as well as the key project challenges.

#### SECTION 2.2. PROJECT MANAGEMENT / PARTNERING

This section shall describe the proposed project management approach to coordination of various tasks and services. In addition to tracking scope, schedule, budget and general administrative functions for the project, the project manager must facilitate developing the final designs with City input and approval. The project manager must also be prepared to coordinate the various implementation and construction work with City staff and facilities, which must remain in service throughout the project with only minor, pre-approved shutdowns.

It is of utmost importance to the City that it selects a competent and compatible business partner for implementation of the Project. The City desires that this business relationship be one of optimum mutual benefit to both parties and that it be conducted in a team partnership environment. The Proposer shall describe its process of assembling a qualified project team and for fostering a team partnership environment on this Project.

City review and participation is an essential part of the City's collaboration with the Design/Builder in the design, construction, testing and startup of the Project. The Proposer shall describe the partnering approach that will be used during various phases of the Project and describe the proposed degree and nature of involvement of City and Proposer staff.

Provide an organization chart showing key team members, respective lines of communication. Include subcontractors, specialty services, quality control staff, inspectors, and other staff to illustrate the full team and organizational structure. Separate, parallel sub-teams may be shown for the various subsets of work. However, all staff and sub-teams shall coordinate through an overall design build project manager for efficient coordination with the City.

#### SECTION 2.3. PROJECT APPROACH

This section shall present the Proposer's plan to implement the Project. The Proposal shall be in sufficient detail so that the City can ascertain the Proposer's ability to comply with the requirements of the Conceptual Documents. It is not the intent of this RFQ/RFP to require the Proposer to repeat detailed information in the Conceptual Documents. In general, the information provided shall be that which supplements or takes exception to the Conceptual Documents. The Proposer shall clearly describe the specifics of the Project. The following topics shall be addressed:

#### Design

- Description of the design firm(s) process of taking existing concepts to final design with City involvement.
- Description of design firm(s) involvement in construction, landscaping, testing and inspection.

- Sequencing and coordination of design, landscaping, construction, testing, and pedestrian movement through the work zones.
- Description of how the construction organizations will be integrated with the design organization during all phases of design in order to promote constructability, value engineering and efficiency of design and construction.
- Description on how business will remain open during construction.

#### **Quality Management**

- Overall quality approach
- Minimum staffing and resource commitment
- Understanding of design change process during construction
- Description of the Proposer's procedures to identify any potential causes of unacceptable designbuild Work.
- Project Safety, including safety of Proposer's staff, and all others that may be present on or adjacent to the site, including the City, consultants, and the public.

#### SECTION 2.4. PROJECT SCHEDULE

The Proposer shall include a Project critical path method (CPM) schedule that presents the major activities necessary to implement the Work. The schedule should commence with the Notice to Proceed and extend to completion of the Work. The Proposer should indicate proposed task start and finish dates, key interim Milestones, and proposed City meeting dates. The proposed schedule shall include all proposed major activities for completing the Work, including ordering and delivery of equipment requiring long lead times, and shall identify the interrelationship between tasks, including the critical path.

Proposers shall identify the dates where receipt of permits are anticipated, if required. The Project schedule shall clearly identify the float in the schedule should the timeframe for obtaining permits extend beyond the Proposer's anticipated timetable for these tasks. Proposers shall also identify specific City responsibilities, anticipated City actions, and suggested City review periods during the design phase, consistent with the requirements of the Contract.

#### SECTION 2.5. DRAWINGS AND DIAGRAMS

Supplemental drawings or diagrams which help explain the technical approach to be followed by the proposer's team may optionally be included.

#### F. SECTION 3: PROPOSAL

Section 3 of the Proposal shall constitute the formal price proposal including all required bidder's certificates and a detailed estimated schedule of values.

#### **SECTION 3.1: PROPOSAL AND BIDDERS CERTIFACTES**

The Proposal forms and Bidders Certificates included in Exhibit 8 shall be completed and submitted with any required attachments; bidder's bond, notary's, etc.

Proposal forms include:

- 1. Design build team identification
- 2. Bid form
- 3. List of subcontractors
- 4. List of proposed substitutions
- 5. Equal employment opportunity certification

- 6. Public Contract Code forms
- 7. Non-collusion affidavit
- 8. Debarment and suspension certification
- 9. Non-Lobbying certification
- 10. Signature page
- 11. Bidder's bond

#### **SECTION 3.2: SCHEDULE OF VALUES**

A detailed schedule of values per the project exhibits is required, with quantities, unit prices and total values matching the Bid Items costs.

#### V. EVALUATION AND RANKING PROPOSALS

Following a general Proposal conformance and Minimum Qualifications screening, the Selection Committee will evaluate the Proposals in accordance with evaluation criteria set forth herein. The City, in its sole discretion, shall have the right to seek written clarifications from any of the Proposers in order to fully understand the nature of the submittals and evaluate the Proposers. The City shall have the sole and final authority to evaluate the submitted Proposals and to determine the ranking of Proposers.

Minimally qualified proposals (proposals with all required information and signatures) will be evaluated and may receive up to a maximum of 100 points. The maximum possible points for each evaluation criterion is set forth below in Table 1. The evaluation criteria are described in more detail below. The subcriteria are also described but are not necessarily listed in order of importance and are not necessarily of equal weight.

Table 1		
Evaluation Criteria	Points	
Team Qualifications	30	
Technical Approach	45	
Price	25	
Total	100	

#### A. PROPOSER TEAM QUALIFICATIONS

Under these criteria, Proposers will be evaluated based upon their experience and qualifications in providing services similar to the proposed Work. The Proposer Qualifications criteria include the subcriteria presented in Table 2.

TABLE 2 QUALIFICATIONS CRITERIA		
Subcriteria	Evaluation Factors	
Team Structure, Management and Working History  Soundness of team and management structure Previous working relationships of the Proposer's team members, if any.		
Experience and Past Performance	Design experience and past performance on similar projects.  Construction experience and past performance on similar projects.  Alternative contracting experience (Design-Build) and past performance on similar projects.	
Key Project Staff Experience and Ability of Professional Personnel	Proposers shall be evaluated based on the strength of "key project staff" as well as the depth of experienced staff resources available within the Proposer structure, including: Design experience and past performance on similar projects  Construction experience and past performance on similar projects. Landscaping experience and past performance on similar projects. Alternative contracting experience (Design-Build) and past performance on similar projects.	

#### **B. TECHNICAL APPROACH**

The Technical approach will be evaluated on the Proposer's ability to meet the performance requirements and provide the Work described in the RFQ/RFP. The Technical Evaluation Criteria include the following sub criteria presented in Table 3.

TABLE 3 TECHNICAL APPROACH CRITERIA		
Subcriteria	Evaluation Factors	
Business coordination and minimizing impacts	Soundness of the proposed business coordination approach including the ability to maintain business operations and public access during construction.	
Project Implementation	The extent to which improvements are propose to be phased to minimize impacts on the public and businesses.  Approach to coordinating the Design/Build Work with City, property owners, and businesses.	
Design/Build	Technical soundness of construction activities, including quality control, and testing.  Approach to quality control	
Project Schedule	Demonstrated understanding of the activities and sequencing necessary to complete the Project.	
Proposed Work Items	The overall impact of the Proposed Work Items on the reliability, schedule, operability, maintenance requirements, long-term costs and other factors will be considered	

#### C. PRICE EVALUATION

The price used for the basis of evaluating Proposals will be the proposed Contract Price. The Proposer with the lowest Contract Price will receive 25 points. The other Proposers will receive a number of price points equal to the greater of:

Zero (0)

And

25 - [(CP-CP<sub>L</sub>)/ CP<sub>L</sub>] \* 35

where:
CP – Contract Price of Proposer
CPL – Lowest Contract Price of any Proposer

The number of price points will be rounded to the nearest tenth of a point.

#### D. TEAM INTERVIEWS (OPTIONAL)

The City, at its sole discretion, may conduct interviews of some or all of the proposal teams (shortlisted teams) to: 1) meet the team(s), 2) confirm or adjust scores based on clarification of the information provided in the written Proposals, and 3) in the case of a tie between shortlisted teams, select the best apparent team for the Project.

#### VI. SELECTION PROCEDURE

Responses to this RFQ/RFP will be reviewed by the City and City representatives. Evaluation of the proposals shall be a competitive selection, based on the basis of overall best value to the City and not on price alone. The City shall have absolute discretion in determining the applicability and weight or relative weight of some or all of the criteria listed in the previous sections and is not required to select the lowest monetary bidder.

It is understood that if the Proposer to whom any award is made fails to enter into a contract, the award may be made to the next best Proposer, who shall be bound to perform as if she/he received the award in the first instance.

The City reserves the right to reject any or all proposals and any item or items therein, and to waive any non-conformity of proposals with this RFP/RFP, whether of a technical or substantive nature, as the interest of the City may require.

All price bids in the proposal shall include federal, state, local and other taxes. Nothing contained in this RFQ/RFP shall create any contractual relationship between the proposing Proposer and the City. The City accepts no financial responsibility for costs incurred by any proposing Proposer regarding this RFP. All Proposers will receive notification indicating acceptance or rejection of their proposal.

Subcontractors are the responsibility of the selected Proposer and there will be no contractual relationship between the subcontractor and the City.

Submission of a proposal will be deemed a binding offer to enter into a contract on the terms contained therein for 90 days from the proposal opening.

#### VII. TERMS AND CONDITIONS

#### A. CONFLICT OF INTEREST

Except for items that are clearly promotional in nature, mass produced, trivial in value and not intended to invoke any form of reciprocation, employees of the City of Grass Valley may not accept gratuities, entertainment, meals, or anything of value whatsoever from current or potential suppliers. The offer of such gratuity to any employee of the City shall be cause for declaring such supplier to be an irresponsible bidder and preventing him from bidding.

#### **B. DBE REQUIREMENTS**

Bidders are urged to obtain DBE participation on this project, although there are no specific goals for DBE participation.

#### C. SIGNED SUBMISSION OF PROPOSALS

The submission of proposals must be signed in longhand by the offeror with his/her usual signature. Submission of proposals by partnerships must be signed with the partnership name by the principal partner, followed by the signature and designation of partner signing; submission of proposals by corporations must be signed with legal name of corporation of president, secretary, or other person authorized to bind it in the matter. The name of each person signing shall be typed or printed below the signature.

#### D. ADDENDUM OF THE RFP

If it becomes necessary to revise any part of this RFQ/RFP, an addendum will be provided in writing to all offerors via the City's website. All addenda issued during the time of bidding will be incorporated into any resulting contract.

#### E. LATE SUBMISSION OF PROPOSALS

Any submission of proposals received after the due date and time specified in RFQ/RFP will not be considered.

#### F. WITHDRAWAL OF SUBMISSION OF PROPOSALS

Any service provider may withdraw his/her submission of proposals, either personally or by written or facsimile request at any time prior to the time set for the proposals' opening, provided that written confirmation of any facsimile withdrawal of the signature of the service provider is placed in the mail and postmarked prior to the time set for the opening thereof.

Negligence on the part of the service provider in preparing his/her submission of proposals confers no right of withdrawal or modification of his/her submission after such submission has been opened.

#### **G. LETTERS OF OBJECTION**

Any offeror believing that any part of the RFQ/RFP, including the specifications and/or the evaluation procedures, is discriminatory against the offeror or precludes the offeror from being given reasonable consideration in the evaluation process must submit a letter twenty (20) days prior to the scheduled opening date specified in the cover letter, to the City's Purchasing Manager clearly stating the specific objection and the areas of concern to the offeror and including proposed method for resolution of such objections. Offerors are cautioned that any such objections not timely raised in the manner specified herein shall not be considered. The City, upon timely receipt of any such letter of objection, shall consider the offeror's objection and, when in the opinion of the City, a modification of the RFQ/RFP shall service the best interest of the City; revisions to the RFQ/RFP, in the form of a written addendum shall be issued to all offerors.

#### H. PUBLIC INFORMATION

After the date specified for the opening of the RFQ/RFP, all materials received relative to this proposal will become public information and be available for inspection. The City reserves the right to retain all

proposals submitted, whether or not the proposal was selected or judged to be responsive.

#### I. SERVICE PROVIDER'S COST TO DEVELOP PROPOSAL

Costs for developing proposals in response to this RFP are entirely the obligation of the service provider and shall not be chargeable in any manner to the City of Grass Valley.

#### J. PROPOSAL VALIDITY PERIOD

Submission of a proposal will signify the supplier's Agreement that his/her proposal is valid for at least ninety (90) days from the date of opening.

#### **K. PERMITS & LICENSES**

Proposer shall secure and maintain in force during the period covered by any contract resulting from this specification all licenses and permits required by law for the operation of their business, including a City of Grass Valley business license.

#### L. CONTRACT TERMS AND CONDITIONS

Proposer shall agree to all terms and conditions identified in the attached sample contract, including adherence to terms of indemnity, insurance and project bonding requirements.

# EXHIBIT 1 CONCEPTUAL PROJECT PLANS

# MILL STREET PROJECT



NOTE: THESE PLANS ARE TO PROVIDE CONCEPTUAL DETAILS (NOT FOR CONSTRUCTION) DESIGN BUILD CONTRACTOR SHALL BE RESPONSIBLE FOR FINAL DESIGN AND CONSTRUCTION

# PROJECT DIRECTORY

## CLIENT

CITY OF GRASS VALLEY 125 E. MAIN STREET GRASS VALLEY, CA 95945

# LANDSCAPE ARCHITECT

ATLAS LAB INC. 1610 R STREET, SUITE 300 SACRAMENTO, CA 95811

## CIVIL ENGINEER

**BKF ENGINEERS** 980 9TH STREET, SUITE 2300 SACRAMENTO, CA 95814

# ARCHITECT

MOGAVERO ARCHITECTS 1331 T STREET SACRAMENTO, CA 95811









CONCEPTUAL PLANS

11.17.21 DATE: \_ SCALE: DRAWN BY:

**CHECKED BY:** SHEET NAME:


**COVER SHEET** 

G0.1


© COPYRIGHT 2021 ATLAS LAB INC.

### **ABBREVIATIONS**


AB	AGGREGATE BASE	OD	OUTSIDE DIAMETER
AC	ASPHALT CONCRETE	<b>FCC</b>	PORTLAND CEMENT CONCRETE
C&G	CURB AND GUTTER	(P)	PROPERTY LINE
CF	CUBIC FOOT	Р	PROPOSED
<u>e</u>	CENTERLINE	PSI	POUNDS PER SQUARE INCH
CY	CUBIC YARD	PUE	PUBLIC UTILITY EASEMENT
E	ELECTRIC	PVC	POLYVINYL CHLORIDE
(E)	EXISTING	PVMT	PAVEMENT
ELEV	ELEVATION	R	RADIUS
EP	EDGE OF PAVEMENT	RCP	REINFORCED CONCRETE PIPE
FL	FLOW LINE	RW	RETAINING WALL
FT	FEET	ROW	RIGHT OF WAY
FTG	FOOTING	SD	STORM DRAIN
G	GAS	SF	SQUARE FOOT
ID	INSIDE DIAMETER	SY	SQUARE YARD
ΙE	INVERT ELEVATION	ST	STREET
L	LEFT	STA	STATION
LF	LINEAR FOOT	STD	STANDARD
LOW	LIMIT OF WORK	SW	SIDEWALK
MAX	MAXIMUM	SS	SANITARY SEWER
MH	MANHOLE	TBC	TOP BACK OF CURB
MIN	MINIMUM	TBW	TOP BACK OF WALK
MISC	MISCELLANEOUS	TFC	TOP FACE OF CURB
NO	NUMBER	TC	TOP OF CURB
NTS	NOT TO SCALE	TP	TELEPHONE POLE
		TS	TRAFFIC SIGNAL
		TYP	TYPICAL

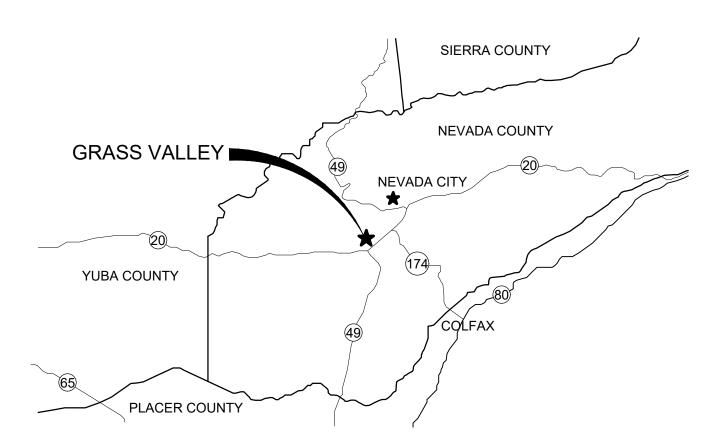

## VICINITY MAP

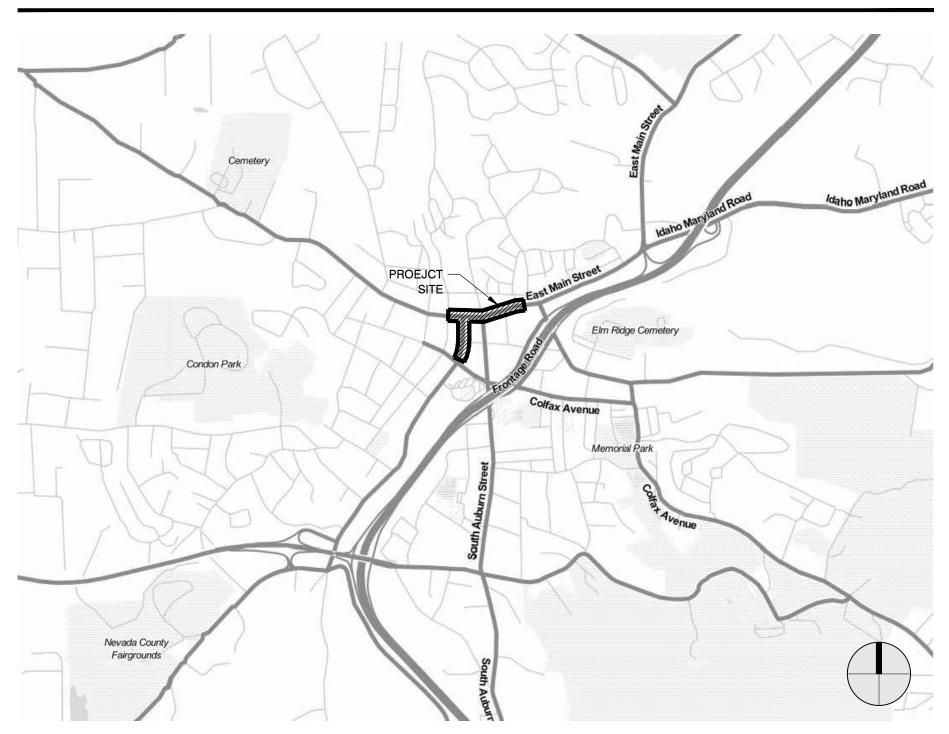

## LOCATION MAP

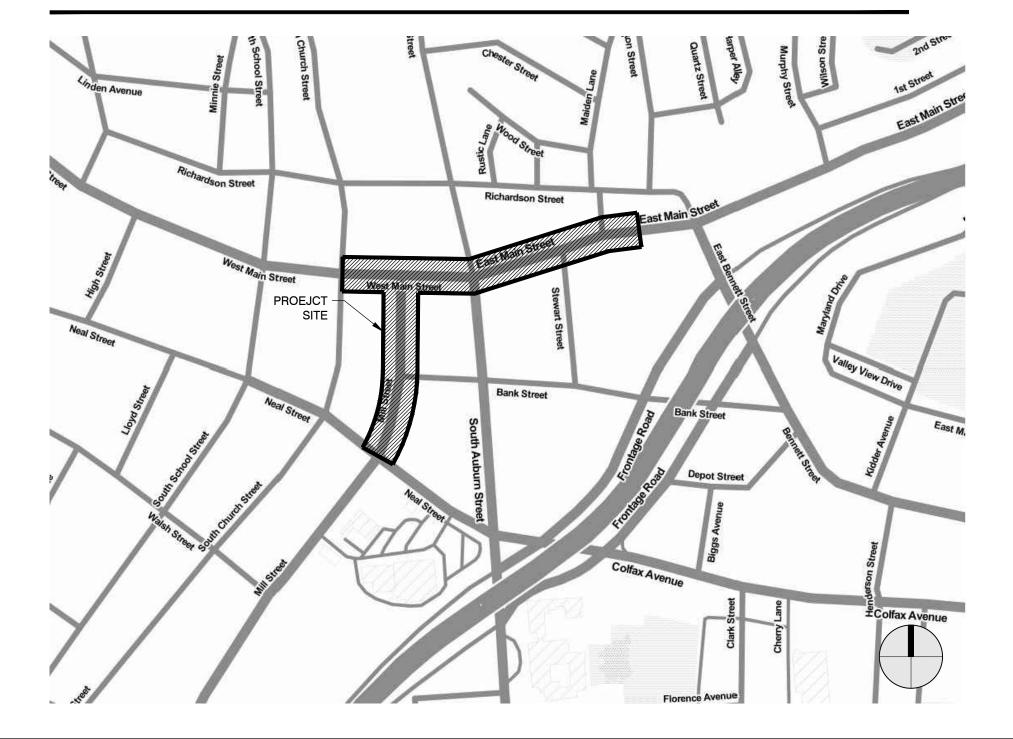

### **GENERAL NOTES**

THE CONTRACTOR SHALL POSSESS A VALID CALIFORNIA CLASS A CONTRACTORS LICENSE, OR A COMBINATION OF THE FOLLOWING CLASSES, (C-7 LOW-VOLTAGE SYSTEMS, C-8 - CONCRETE CONTRACTOR, C-10 ELECTRICAL, C-12 - EARTHWORK AND PAVING CONTRACTOR, C-13 FENCING, C-27 LANDSCAPING, C-31 CONSTRUCTION TRAFFIC CONTROL, C-32 PARKING AND HIGHWAY IMPROVEMENT, C-34 PIPELINE, C-36 - PLUMBING CONTRACTOR AND D63 - CONSTRUCTION CLEANUP) AT THE TIME OF THE BID AWARD, AND THE LICENSE SHALL REMAIN IN EFFECT THROUGHOUT THE TERM OF THIS CONTRACT.

THE DESIGNER SHALL BE A LICENSED PROFESSIONAL CIVIL ENGINEER AND COMBNATION OF OTHER LICENSED PROFESSIONALS THAT WILL BE REQUIRED TO DESIGN THE PROPOSED IMPROVEMENTS TO CURRENT STANDARDS AND THE LICENSES SHALL REMAIN IN EFFECT THROUGHOUT THE TERM OF THIS AGREEMENT.

- THE CONSTRUCTION METHODS AND MATERIALS SHALL CONFORM TO LATEST EDITIONS OF THE STATE OF CALIFORNIA, DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS AND STANDARD PLANS, THE IMPROVEMENT STANDARDS AND STANDARD DRAWINGS OF THE CITY OF GRASS VALLEY AND THE CALIFORNIA MUTCD. IN CASE OF CONFLICT, REFER TO THE PROJECT SPECIAL PROVISIONS FOR ORDER OF PRECEDENCE.
- THE CITY OF GRASS VALLEY HAS MADE EVERY EFFORT TO SHOW LOCATIONS OF ANY AND ALL EXISTING SURFACE AND SUBSURFACE STRUCTURES. HOWEVER, ACTUAL FIELD CONDITIONS AND LOCATIONS CAN VARY CONSIDERABLY FROM PLAN LOCATIONS. THEREFORE, THE CITY OF GRASS VALLEY CANNOT, AND DOES NOT, ASSUME RESPONSIBILITY OF THE EXISTENCE OR LOCATION OF ANY STRUCTURE SUCH AS, BUT NOT LIMITED TO, UTILITIES, PIPELINES AND SEWERS. THE CONTRACTOR IS RESPONSIBLE FOR CONTACTING ALL AGENCIES AND/OR OWNERS TO VERIFY THIS INFORMATION PRIOR TO AND DURING CONSTRUCTION OF IMPROVEMENTS SHOWN HEREON, AND TO CONTACT THE ENGINEER IN THE EVENT OF ANY SIGNIFICANT DISCREPANCY.
- 4. THE CONTRACTOR IS RESPONSIBLE FOR DETERMINING THE LOCATION OF, AND PROTECTING ALL EXISTING UTILITIES AND REPAIRING DAMAGE TO EXISTING UTILITIES. THE CONTRACTOR SHALL CONTACT UNDERGROUND SERVICE ALERT (1-800-227-2600) TWO WORKING DAYS PRIOR TO COMMENCEMENT OF EXCAVATION.
- CONTRACTOR IS RESPONSIBLE FOR ALL UTILITY RELOCATIONS, UTILITY GRADE ADJUSTMENTS, AND NEW UTILITIES AND SHALL COORDINATE WITH THE CITY AND WITH APPLICABLE UTILITY PURVEYORS, INCLUDING OBTAINING ANY PERMITS OR PAYING ANY FEES.
- THE CONTRACTOR AGREES THAT, IN ACCORDANCE WITH GENERALLY ACCEPTED CONSTRUCTION PRACTICES, THE CONTRACTOR WILL BE REQUIRED TO ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THE PROJECT, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY. THIS REQUIREMENT SHALL BE MADE TO APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS. THE CONTRACTOR FURTHER AGREES TO DEFEND, INDEMNIFY AND HOLD THE CITY OF GRASS VALLEY AND THEIR CONSULTANTS HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT.
- EXCAVATIONS SHALL BE ADEQUATELY SHORED, BRACED AND SHEETED SO THAT THE EARTH WILL NOT SLIDE OR SETTLE AND SO THAT ALL EXISTING IMPROVEMENTS OF ANY KIND WILL BE FULLY PROTECTED FROM DAMAGE. ANY DAMAGE RESULTING FROM A LACK OF ADEQUATE SHORING, BRACING AND SHEETING, SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR AND HE SHALL EFFECT NECESSARY REPAIRS OR RECONSTRUCTION AT THEIR OWN EXPENSE. WHERE THE EXCAVATION FOR A CONDUIT TRENCH, AND/OR STRUCTURE IS FIVE FEET OR MORE IN DEPTH, THE CONTRACTOR SHALL PROVIDE ADEQUATE SHEETING, SHORING AND BRACING OR EQUIVALENT METHOD, FOR THE PROTECTION OF LIFE, OR LIMB, WHICH SHALL CONFORM TO THE APPLICABLE CONSTRUCTION SAFETY ORDERS OF THE DIVISION OF INDUSTRIAL SAFETY OF THE STATE OF CALIFORNIA, THE CONTRACTOR SHALL ALWAYS COMPLY WITH OSHA REQUIREMENTS.
- 8. ALL APPLICABLE REQUIREMENTS OF THE CALIFORNIA CONSTRUCTION AND GENERAL INDUSTRY SAFETY ERRORS, THE OCCUPATIONAL SAFETY AND HEALTH ACT AND THE CONSTRUCTION SAFETY ACT SHALL BE MET.
- 9. ALL WORK SHALL BE COMPLETED AS DIRECTED BY THE LATEST VERSION OF THE CITY OF GRASS VALLEY CONSTRUCTION STANDARDS AND STANDARD DETAILS.
- 10. CONTRACTOR SHALL LEAVE SITE CLEAN AND ORDERLY DURING CONSTRUCTION PROCESS. REMOVE FROM SITE ALL EXCESS MATERIALS, SOIL, DEBRIS AND EQUIPMENT. STORE MATERIALS ONLY IN AN APPROVED LOCATION.
- 11. ALL EROSION CONTROL SHALL BE PLACED AS DETERMINED BY THE ENGINEERING DIVISION INSPECTOR.

DUST, SILT AND DIRT FROM BEING RELEASED OR TRACKED OFFSITE.

- 12. NON-POTABLE WATER SHALL BE SPRAYED ON ALL EXPOSED EARTH SURFACES DURING CLEARING GRADING, EARTH MOVING, AND OTHER SITE PREPARATION ACTIVITIES. THE EXPOSED EARTH SHALL BE WATERED THROUGHOUT THE DAY TO MINIMIZE DUST.
- 13. TARPAULINS OR OTHER EFFECTIVE COVERS SHALL BE USED ON ALL STOCKPILED EARTH MATERIAL AND ON HAUL TRUCKS TO MINIMIZE DUST.
- 14. THE CITY SHALL HAVE THE AUTHORITY TO STOP ALL GRADING OPERATIONS, IF, IN OPINION OF CITY STAFF, INADEQUATE DUST CONTROL MEASURES ARE BEING PRACTICED OR EXCESSIVE WIND CONDITIONS CONTRIBUTE TO FUGITIVE DUST EMISSIONS.
- 15. WORK AREAS AND ADJACENT STREET FRONTAGES SHALL BE SWEPT AT LEAST ONCE A DAY TO REMOVE SILT AND OTHER DIRT WHICH IS **EVIDENT FROM CONSTRUCTION ACTIVITIES.**
- 16. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CLEANING CONSTRUCTION VEHICLES LEAVING THE SITE ON A DAILY BASIS TO PREVENT
- 17. THE CONTRACTOR SHALL PROVIDE FOR SAFE ACCESSIBLE INGRESS AND EGRESS FOR ADJACENT PROPERTY OWNERS AND EVA THROUGHOUT THE PERIOD OF CONSTRUCTION . TEMPORARY THROUGH ACCESS FOR THE GENERAL PUBLIC DUE TO CONSTRUCTION STAGING OR LIMITATIONS MUST BE FULLY REVIEWED AND APPROVED BY THE CITY OF GRASS VALLEY PRIOR TO IMPLEMENTATION. ALL
- CONTRACTOR AND ACCEPTED BY THE CITY OF GRASS VALLEY. 18. DURING CONSTRUCTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR EMERGENCY VEHICLE ACCESS, PUBLIC SAFETY AND SAFETY OF EXISTING STRUCTURES. THE CONTRACTOR SHALL PROVIDE ALL LIGHTS, SIGNS, FENCING, BARRICADES, TRAFFIC CONTROLS, FLAGGERS SHORINGS, BRACING AND GUYS OR OTHER DEVICES NECESSARY TO PROVIDE FOR SAFETY IN ACCORDANCE WITH ALL NATIONAL, STATE SPECS AND LOCAL SAFETY ORDINANCES. THE CONTRACTOR SHALL POST EMERGENCY TELEPHONE NUMBERS FOR POLICE, FIRE,

ACCESS MUST BE SAFE, SECURED, FLAGGED, SIGNED, AND ACCESSIBLE PER THE APPROVED SITE ACCESS PLAN SUBMITTED BY THE

19. ALL EXISTING UTILITIES AND IMPROVEMENTS THAT BECOME DAMAGED DURING CONSTRUCTION MUST BE COMPLETELY RESTORED TO THE SATISFACTION OF THE CITY ENGINEER OR UTILITY AGENCY REPRESENTATIVE. AT THE CONTRACTOR'S SOLE EXPENSE.

AMBULANCE, AND THOSE AGENCIES RESPONSIBLE FOR MAINTENANCE OF UTILITIES IN THE VICINITY OF JOB SITE.

- 20. ANY RELOCATION OF PUBLIC UTILITIES SHALL BE CONDUCTED IN ACCORDANCE WITH ANY AND ALL REQUIREMENTS OF THE UTILITY COMPANY REPRESENTATIVE INCLUDING FEES, BONDS, PERMITS AND WORKING CONDITIONS, ETC. THE CONTRACTOR SHALL PAY THE COST OF ALL SUCH RELOCATION WORK INCLUDING FEES, BONDS, PERMITS, ETC.
- 21. THE CONSTRUCTION OF ALL GRAVITY UNDERGROUND LINES (STORM DRAINS) SHALL BEGIN AT THE MOST DOWNSTREAM END, UNLESS OTHERWISE SPECIFICALLY APPROVED BY CITY ENGINEER.
- 22. THE USE OR INSTALLATION OF ANY MATERIAL OR EQUIPMENT WHICH IS MADE FROM, OR WHICH CONTAINS ASBESTOS FOR USE IN THE CONSTRUCTION OF THESE IMPROVEMENTS, IS NEITHER SPECIFIED NOR RECOMMENDED. ANY PARTY INSTALLING OR USING ANY PARTY SUCH MATERIALS OR EQUIPMENT SHALL BE SOLELY RESPONSIBLE FOR ALL INJURIES, DAMAGES, OR LIABILITIES OF ANY KIND, CAUSED BY THE USE OF SUCH MATERIALS OR EQUIPMENT.
- 23. CONSTRUCTION SHALL STOP IF CULTURAL RESOURCES ARE SUSPECTED. IT IS POSSIBLE THAT PREVIOUS ACTIVITIES HAVE OBSCURED SURFACE EVIDENCE OF CULTURAL RESOURCES. IF SIGNS OF AN ARCHEOLOGICAL SITE, SUCH AS ANY UNUSUAL AMOUNTS OF STONE, BONE, OR SHELL, ARE UNCOVERED DURING GRADING OR OTHER CONSTRUCTION ACTIVITIES, WORK SHALL BE HALTED WITHIN 100 FEET OF THE FIND AND THE CITY INSPECTOR SHALL BE NOTIFIED. A QUALIFIED ARCHEOLOGIST SHALL BE CONSULTED FOR AN ON-SITE EVALUATION. THE ARCHEOLOGIST MAY REQUIRE ADDITIONAL MITIGATION.
- 24. SHOULD GRADING OPERATIONS UNCOVER HAZARDOUS MATERIALS, OR WHAT APPEARS TO BE HAZARDOUS MATERIALS, THE FIRE DEPARTMENT SHALL BE CONTACTED IMMEDIATELY. THE AREA, WHICH CONTAINS THE HAZARDOUS MATERIALS, SHALL BE MARKED OFF UNTIL AN INVESTIGATION BY A MEMBER OF THE FIRE DEPARTMENT IS CONDUCTED.
- 25. LIGHTING DESIGN AS SHOWN FOR MILL STREET IS INTENDED TO PROVIDE A MINIMUM OF 5 FOOTCANDLES FOR NIGHTTIME USE AND TO ALLOW FOR SEASONAL INSTALLATION OF STRING LIGHTS. CONTRACTOR IS RESPONSIBLE FOR PROVIDING AND INSTALLING ALL POLES, FIXTURES, AND STRING LIGHTS AS SHOWN AND ANY ADDITIONAL CONDUIT AND CONNECTIONS TO EXISTING ELECTRICAL SYSTEMS TO PROVIDE PROPER FUNCTION FOR THE LIGHTING SYSTEM. FINAL LIGHTING DESIGN AND ELECTRICAL SUPPLY TO BE COORDINATED WITH THE CITY AND WITH PG&E AND VERIFIED BY AN ELECTRICAL ENGINEER AS NECESSARY TO MEET APPLICABLE STATE AND LOCAL CODES.
- 26. THE EXISTING CONDITIONS INFORMATION SHOWN ON THESE PLANS HAVE BEEN COMPILED FROM VARIOUS SOURCES AS DETAILED ON EXISTING CONDITIONS PLANS. CONTRACTOR IS RESPONSIBLE FOR OBTAINING A DETAILED TOPOGRAPHIC SURVEY AND VERIFYING FIELD CONDITIONS PRIOR TO START OF ANY WORK.

## SHEET INDEX

SHEET NAME SHEET NUMBER

**GENERAL** 

G0.1 **COVER SHEET** 

G0.2 GENERAL INFORMATION

**EXISTING CONDITIONS** 

EX1.0 **EXISTING CONDITIONS - MAIN STREET** 

CIVIL

C1.0 **DEMOLITION PLAN - MAIN STREET DEMOLITION PLAN - MILL STREET** C2.0 SURFACE IMPROVEMENTS C3.0 **GRADING PLAN** 

C4.0 UTILITY PLAN C5.0 **DETAILS** 

WATER UTILITIES

W1.0 WATER LINE REPLACEMENT PLAN

LANDSCAPE

LAYOUT AND MATERIALS PLAN - MAIN STREET L1.1 L1.2 LAYOUT AND MATERIALS PLAN - MILL STREET

L1.3 LAYOUT PLAN ENLARGEMENTS CONSTRUCTION DETAILS CONSTRUCTION DETAILS L1.6 CONSTRUCTION DETAILS

SITE FURNISHING CUTSHEEETS LIGHTING PLAN

LIGHTING CUTSHEETS

IRRIGATION LEGEND AND NOTES L2.2 **IRRIGATION PLAN - MILL STREET** PLANTING PLAN - MAIN STREET L3.1 PLANTING PLAN - MILL STREET

## UTILITY AND EMERGENCY CONTACTS

WATER/SEWER/ STORM DRAIN:	CITY OF GRASS VALLEY 125 E MAIN ST GRASS VALLEY, CA 95945	530-274-4350
FIRE PROTECTION:	CITY OF GRASS VALLEY 125 E MAIN ST GRASS VALLEY, CA 95945	530-274-4370
ELECTRICITY/GAS:	PG&E 788 TAYLORVILLE RD GRASS VALLEY, CA 95945	530-477-3260
TELEVISION:	COMCAST 427 EATON RD CHICO, CA 95973	530-206-6172
PHONE:	AT&T 12824 EARHART DRIVE AUBURN, CA 95602	530-888-2031







PROJECT INFO

NAME: MILL STREET PROJECT CLIENT: CITY OF GRASS VALLEY PROJECT NUMBER: 0069

SUBMITTAL DESCRIPTION CONCEPTUAL PLANS

**ISSUANCE AND REVISIONS** 

11.17.21 SCALE: **DRAWN BY CHECKED BY:** 

SHEET NAME: **GENERAL INFORMATION** 

CALL BEFORE YOU DIG

THE CONTRACTOR SHALL CALL "UNDERGROUND SERVICE ALERT" (USA) AT 1-800-227-2600 AT LEAST TWO WORKING

DAYS PRIOR TO PERFORMING EXCAVATION.

G0.2

© COPYRIGHT 2021 ATLAS LAB INC.





ATLAS
LAB attastab.com
1610 R Street, Suite 300 Landscape Architec
Sacramento, CA 95811 Community Develop
916.290.9366 Public Art

GRASS VALLEY, CA

NAME: MILL STREET PROJECT
CLIENT: CITY OF GRASS VALLEY

CONCEPTUAL PLANS

PROJECT NUMBER: 0069

SSUANCE AND REVISIONS

TAMP

 DATE:
 11.17.22

 SCALE:
 AS SHOWN

 DRAWN BY:
 BCC

DRAWN BY: BC
CHECKED BY: E
SHEET NAME:

EXISTING
CONDITIONS
PLAN
SHEET NUMBER:

EX1.0

© COPYRIGHT 2021 ATLAS LAB INC.

PROFESSIONA PROFESSIONA C 64850

SCALE: AS SHOW
DRAWN BY: NG, C
CHECKED BY: S
SHEET NAME:


DEMOLITION PLAN
SHEET NUMBER:

C1.0

COPYRIGHT 2021 ATLAS LAB INC.

Know what's below.
Call before you dig.

980 9TH STREET
SUITE 2300
SACRAMENTO, CA 95814
(916) 556-5800
www.bkf.com

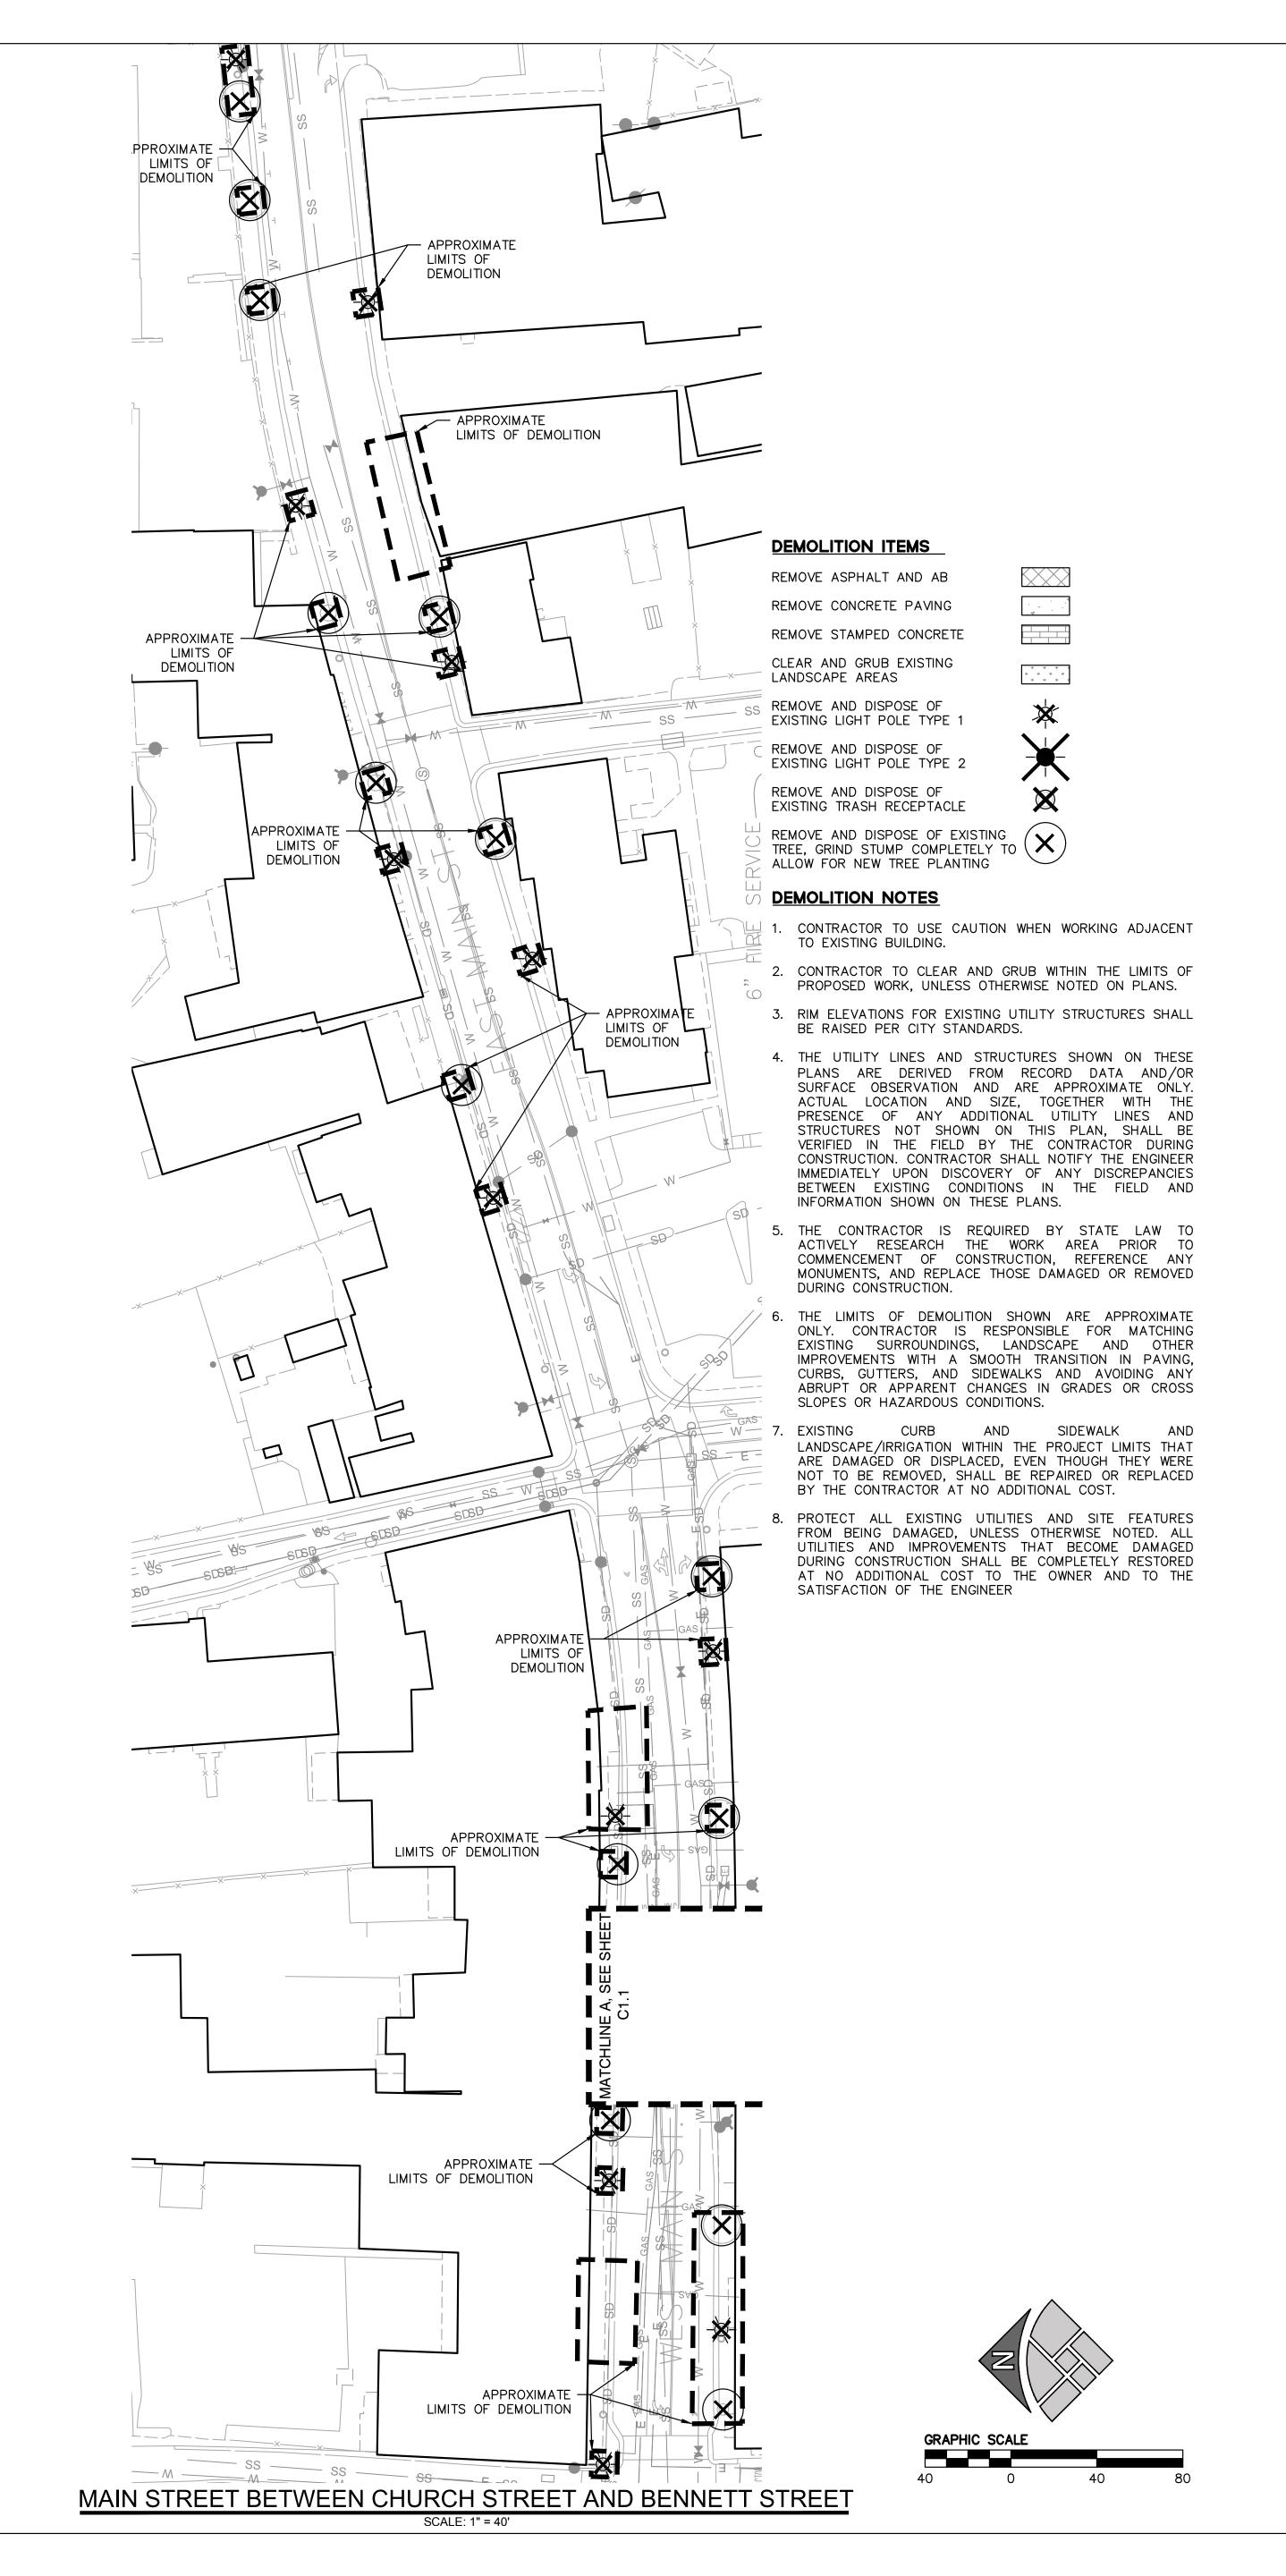





PROJECT INFO

NAME: MILL STREET PROJECT CLIENT: CITY OF GRASS VALLEY PROJECT NUMBER: 0069

SUBMITTAL DESCRIPTION 30% DESIGN

ISSUANCE AND REVISIONS

STAMP



SCALE: **DRAWN BY:** CHECKED BY: \_\_\_\_\_

SHEET NAME:

www.bkf.com

DEMOLITION PLAN SHEET NUMBER:

COPYRIGHT 2021 ATLAS LAB INC.






PROJECT INFO

NAME: MILL STREET PROJECT CLIENT: CITY OF GRASS VALLEY PROJECT NUMBER: 0069

SUBMITTAL DESCRIPTION

**ISSUANCE AND REVISIONS** 

STAMP



DRAWN BY: CHECKED BY: SHEET NAME:

SURFACE IMPROVEMENTS

C2.0

COPYRIGHT 2021 ATLAS LAB INC.





ATLAS
LAB atlastab.col
1610 R Street, Sulte 300 Landscape Arch
Sacramento, CA 95811 Urban Design

T STREET PROJE


PROJECT INFO

NAME: MILL STREET PROJECT
CLIENT: CITY OF GRASS VALLEY
PROJECT NUMBER: 0069

SUBMITTAL DESCRIPTION
30% DESIGN

ISSUANCE AND REVISIONS

STAMP



 DATE:
 10.15.21

 SCALE:
 AS SHOWN

 DRAWN BY:
 NG, CN

 CHECKED BY:
 SR


SHEET NAME:

GRADING PLAN

C3 U

C3.0
©COPYRIGHT 2021 ATLAS LAB INC.



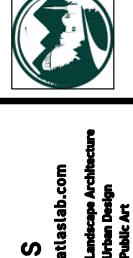

1610 R Street, Suite 300 Landscape Architect Secramento, CA 95811 Urban Design

STRET PROJ

PROJECT INFO

30% DESIGN

NAME: <u>MILL STREET PROJECT</u>
CLIENT: <u>CITY OF GRASS VALLEY</u>
PROJECT NUMBER: <u>0069</u>

SUBMITTAL DESCRIPTION

ISSUANCE AND REVISIONS

STAMP



DATE:	10.15.21
SCALE:	AS SHOWN
DRAWN BY:	
CHECKED BY:	0.0
CHECKED B1.	
CHEET NAME.	

UTILITY PLAN

C4.0


©COPYRIGHT 2021 ATLAS LAB INC.


30% DESIGN

DRAWN BY: \_\_\_ CHECKED BY: SR


DETAILS


C5.0 COPYRIGHT 2021 ATLAS LAB INC.

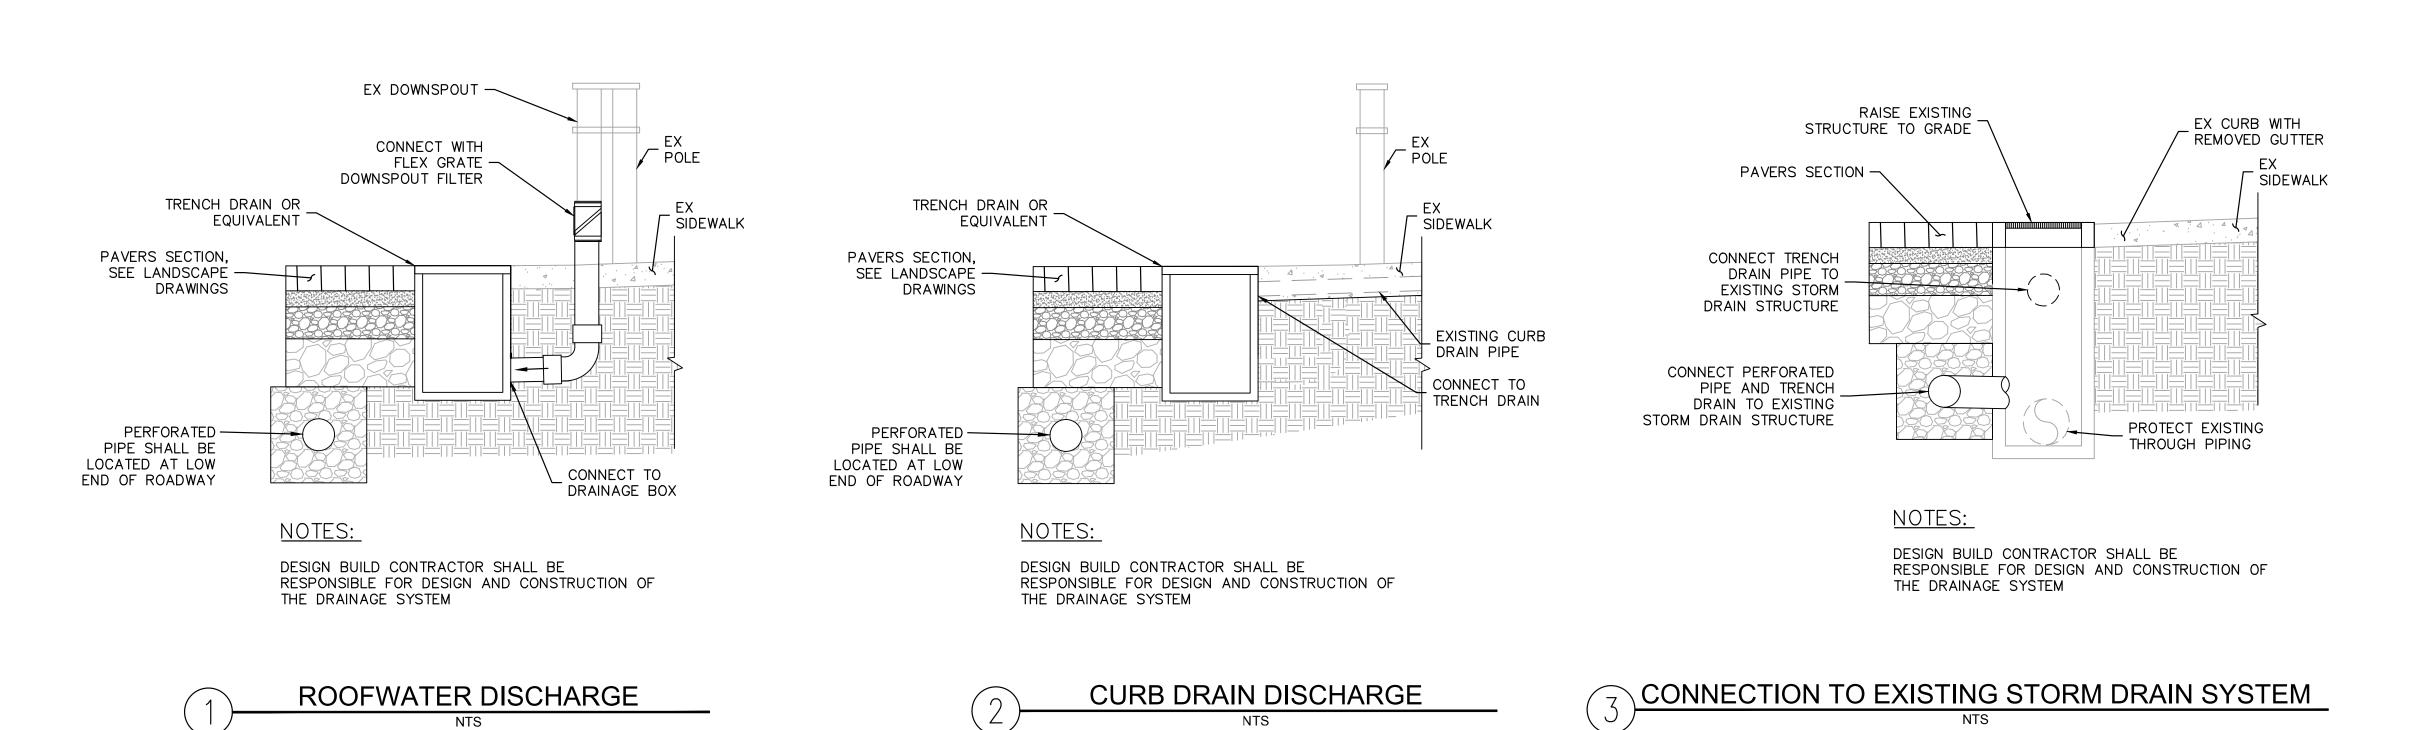

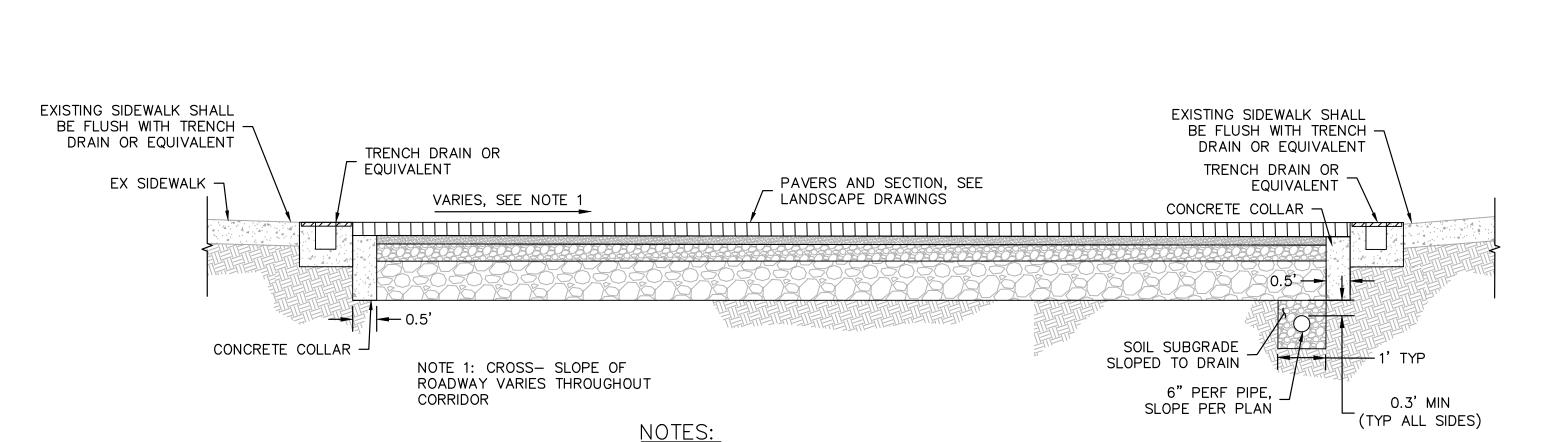

- 1. DESIGN BUILD CONTRACTOR SHALL BE RESPONSIBLE FOR DESIGN AND CONSTRUCTION OF THE DRAINAGE SYSTEM.
- 2. THE DESIGN OF PERMEABLE PAVEMENT, CUT OFF WALLS, AND CONCRETE COLLARS SHALL BE DESIGNED BY THE DESIGN BUILD TEAM AS NEEDED TO PREVENT SEEPAGE OF WATER FROM MIGRATING ALONG TRENCH BEYOND THE EDGE OF PERVIOUS PAVEMENT.
- TYPICAL STREET CROSS-SECTION

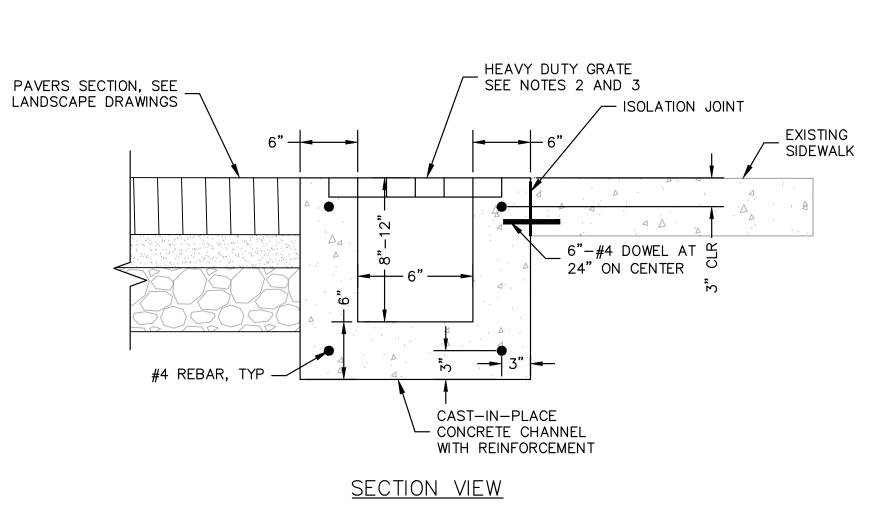

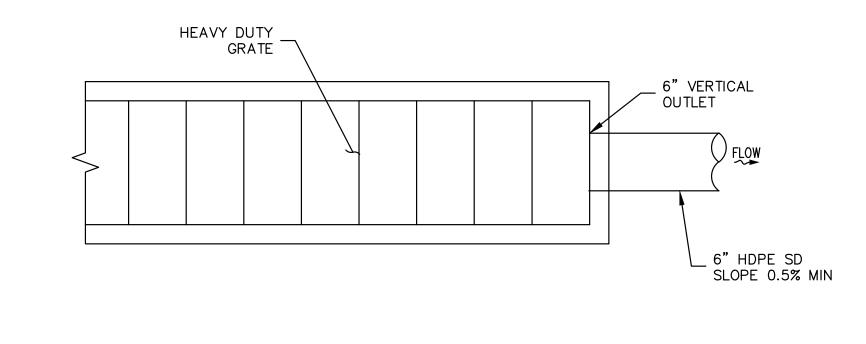

<u>PLAN VIEW</u>

NOTES:

- 1. SLOPE CHANNEL AT A MINIMUM OF 0.5% SLOPE.
- 2. BOLT GRATE ON TOP OF CHANNEL. GRATE SHALL BE FLUSH WITH

PAVEMENT AND NOT PROVIDE A LIP GREATER THAN 1/4".

- 3. GRATE SHALL HAVE BEARING BARS SPACED TO MEET ACCESSIBILITY REQUIREMENTS PER CBC, LATEST EDITION. GRATE SHALL BE H-20 TRAFFIC RATED, HAVE A LOCKING MECHANISM, AND SHALL BE BICYCLE AND HEEL FRIENDLY.
- 4. PROVIDE STAINLESS STEEL PIPE CAPS AT ENDS OF CHANNEL TO CONNECT PIPING

TRENCH DRAIN NOT TO SCALE

PROJECT NUMBER: 0069 SUBMITTAL DESCRIPTION

**ISSUANCE AND REVISIONS** 

11.17.21 AS SHOWN SCALE: DRAWN BY: CHECKED BY: \_\_

SHEET NAME: WATER LINE

REPLACEMENT SHEET NUMBER:

W1.0

© COPYRIGHT 2021 ATLAS LAB INC.

SUBMITTAL DESCRIPTION

 DATE:
 11.17.21

 SCALE:
 AS SHOWN

 DRAWN BY:
 BCC

 CHECKED BY:
 EP

 SHEET NAME:

LAYOUT PLAN

SHEET NUMBER:

L1.1

© COPYRIGHT 2021 ATLAS LAB INC.

LAYOUT LEGEND

TYP. TYPICAL

S.C.D. SEE CIVIL'S DRAWINGS

RADIUS- ALL RADII GIVEN FOR WALLS ARE DIMENSIONED TO OUTSIDE OF

ALIGN

STEWART ST.

S. AUBURN

CHURCH ST.

EQ. EQUAL

P.A. PLANTING AREA

NECESSARY.

.W. LIMIT OF WORK DETAIL

MAIN STREET PARKLET APPROXIMATE LOCATION

1/L1.1

REMOVE AND REPLACE EXISTING LIGHT POLE IN PLACE WITH LIGHT POLE TYPE C, TYP. CONNECT NEW LIGHT TO EXISTING POWER SUPPLY AS

3 EXISTING TREE PIT, REMOVE EXISTING TREE AND 2/L1.1 GRATE. PREPARE FOR TREE PLANTING PER DETAIL 5/L1.3.


### LANDSCAPE SCHEDULE

	LANDSCAPE SCHEDULE						
	SYMBOL	DESCRIPTION	QTY	DETAIL			
	L-01	PERMEABLE VEHICULAR BRICK PAVING	19,648 sf	1/L1.6			
	L-02	VEHICULAR BRICK PAVING	810 sf	2/L1.6			
	L-03	CONCRETE PAVING	593 sf	3/L1.6			
	L-04	TRENCH DRAIN, S.C.D.	S.C.D.	S.C.D.			
0	L-05	AUTOMATIC RETRACTABLE BOLLARD	13	8/L1.7			
0	L-06	AUTOMATIC RETRACTABLE BOLLARD CONTROL SYSTEM	3	7/L1.7			
	SYMBOL	DESCRIPTION	QTY	DETAIL			
Þ	L-07	BOTTLE FILLER	1	1/L1.7			
	L-08	MODULAR RAISED PLANTER TYPE A, 4` X 2`	28	3/L1.5			
	L-09	MODULAR RAISED PLANTER TYPE B, 48" DIA.	6	3/L1.5			
	L-10	PATIO RAILING	186 If	4/L1.5			
	L-11	TRASH RECEPTACLE	9	2/L1.7			
®	L-12	RECYCLING RECEPTACLE	9	3/L1.7			
	L-13	DINING TABLE*	1	4/L1.7			
	L-14	CHAIR*	148*	5/L1.7			
	L-15	UMBRELLA*	17*	6/L1.7			
	L-16A	PICNIC TABLE WITH UMBRELLA, ONE BENCH	5	1/L1.5			
	L-16B	PICNIC BENCH WITH UMBRELLA, TWO BENCHES	2	1/L1.5			
*A	L-17A	LIGHT POLE TYPE A	14	1/L1.9			
* <sub>B</sub>	L-17B	LIGHT POLE TYPE B	12	1/L1.9			
* <sub>c</sub>	L-17C	LIGHT POLE TYPE C	13	2/L1.9			
<del></del>	L-18	STRING LIGHTS	1,436 lf	3/L1.9			
•	L-19	UPLIGHT	42	4/L1.9			
<b>=</b>	L-20	GFCI RECEPTACLE	21	-			
	L-21	RAILING PLANTER*	13*	5/L1.5			
	L-22	LUNCH COUNTER*	10 lf*	6/L1.5			
		* = NOT SHOWN ON PLAN. QUANTITIES PROVIDED FO	OR BIDDING P	JRPOSES.			

### LAYOUT NOTES

- 1. ALL WRITTEN DIMENSIONS SUPERCEDE ALL SCALED DISTANCES AND DIMENSIONS. DIMENSIONS SHOWN ARE FROM THE FACE OF THE BUILDING, WALL, BACK OF CURB, EDGE OF WALK, PROPERTY LINE, OR CENTERLINE OF COLUMN UNLESS OTHERWISE NOTED ON THE DRAWINGS.
- 2. ALL DIMENSIONS AT BUILDING ARE TO FACE OF BUILDING. ALL DIMENSIONS AT ROADWAY ARE TO FACE OF CURB.
- 3. ALL CURVES AND ALL TRANSITIONS BETWEEN CURVES AND STRAIGHT EDGES SHALL BE SMOOTH.
- 4. ALL RETURN RADII AND CURB DATA ARE TO FACE OF CURB.
- 5. SIDEWALK, CURB AND GUTTER, GRADING AND DRAINAGE IS BASED ON DRAWINGS PREPARED BY THE CIVIL ENGINEER.
- 6. ANY EXTRA CONSTRUCTION STAKING NECESSITATED SOLELY BY THE CONTRACTOR'S NEGLIGENCE WILL BE CHARGED TO THE CONTRACTOR ON A TIME AND EXPENSES BASIS AND PAID FOR BY THE CONTRACTOR.
- 7. SEE IRRIGATION DRAWINGS FOR GENERAL SYSTEM REQUIREMENTS AND FOR LOCATION OF IRRIGATION MAINLINE PIPING. SLEEVES TO ACCOMMODATE IRRIGATION PIPING, SIZED AS NEEDED, SHALL BE IN PLACE UNDER AND THROUGH SLABS AND WALLS, PRIOR TO POURING.
- 8. ALL CONCRETE PAVEMENTS SHALL BE DOWELED INTO CURBS, SIDEWALKS, AND BUILDING FOUNDATIONS.
- CONTRACTOR TO ENSURE A FLUSH CONDITION BETWEEN NEW AND EXISTING PAVING.
- 10. ALL TYPICAL DETAILS SHALL APPLY UNLESS NOTED OTHERWISE.

- 11. CONCRETE FOOTINGS INSTALLED FOR ALL SITE FURNISHINGS, EQUIPMENT, ETC.. IN DECORATIVE PAVEMENT, ASPHALT PAVING, CONCRETE PAVING, AND PLANTERS SHALL BE HELD BELOW GRADE.
- 12. ALL EXISTING ITEMS TO REMAIN SHALL BE PROTECTED AS REQUIRED. ANY DAMAGED ITEMS SHALL BE FULLY REPAIRED OR REPLACED AT THE CONTRACTOR'S EXPENSE TO THE FULL SATISFACTION OF THE OWNER.
- 13. ALL PATTERNS, LINE TYPES, AND SYMBOLS SHOWN WITHIN THE PLAN SET REFERENCE THE LAYOUT LEGEND AND ARE PART OF THE SCOPE OF WORK. CALLOUTS ARE SHOWN FOR CLARIFICATION OF WORK, BUT DO NOT INDICATE EVERY AND ALL INSTANCES OF SUCH WORK.

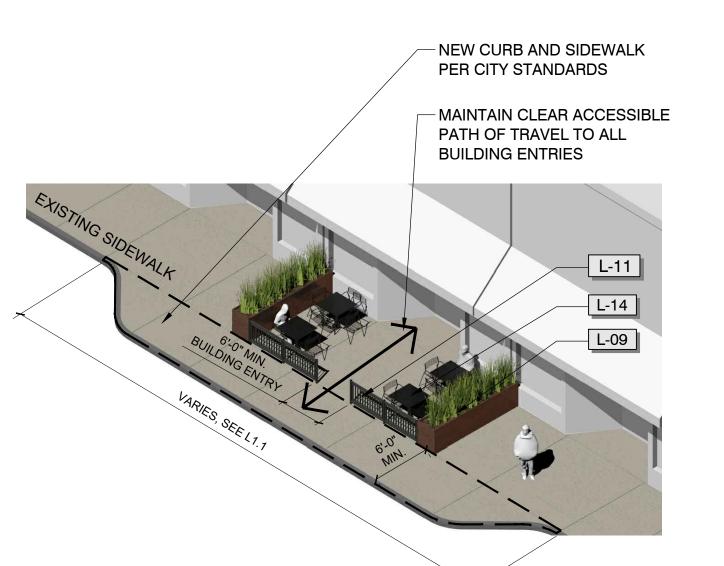

MAIN STREET TYPICAL TREE PLANTING

1/4" = 1'-0"

MAIN STREET PARKLET CONCEPT

MATCH EXISTING TREE

PIT/TREE

GRATE

— EXISTING TREE TO BE REMOVED PER SITE PREPARATION AND DEMOLITION PLANS.

REMOVE AND DISPOSE OF EXISTING TREE

GRATE. INSTALL NEW DECORATIVE TREE

— REPAIR AND ADJUST EXISTING IRRIGATION

TREE PLANTING

P-CO-MIL-56


P-CO-MIL-57

SPECIES PER PLANTING PLAN

GRATE (HEEL-PROOF).

L-20
2 PER TREE

1" = 40'

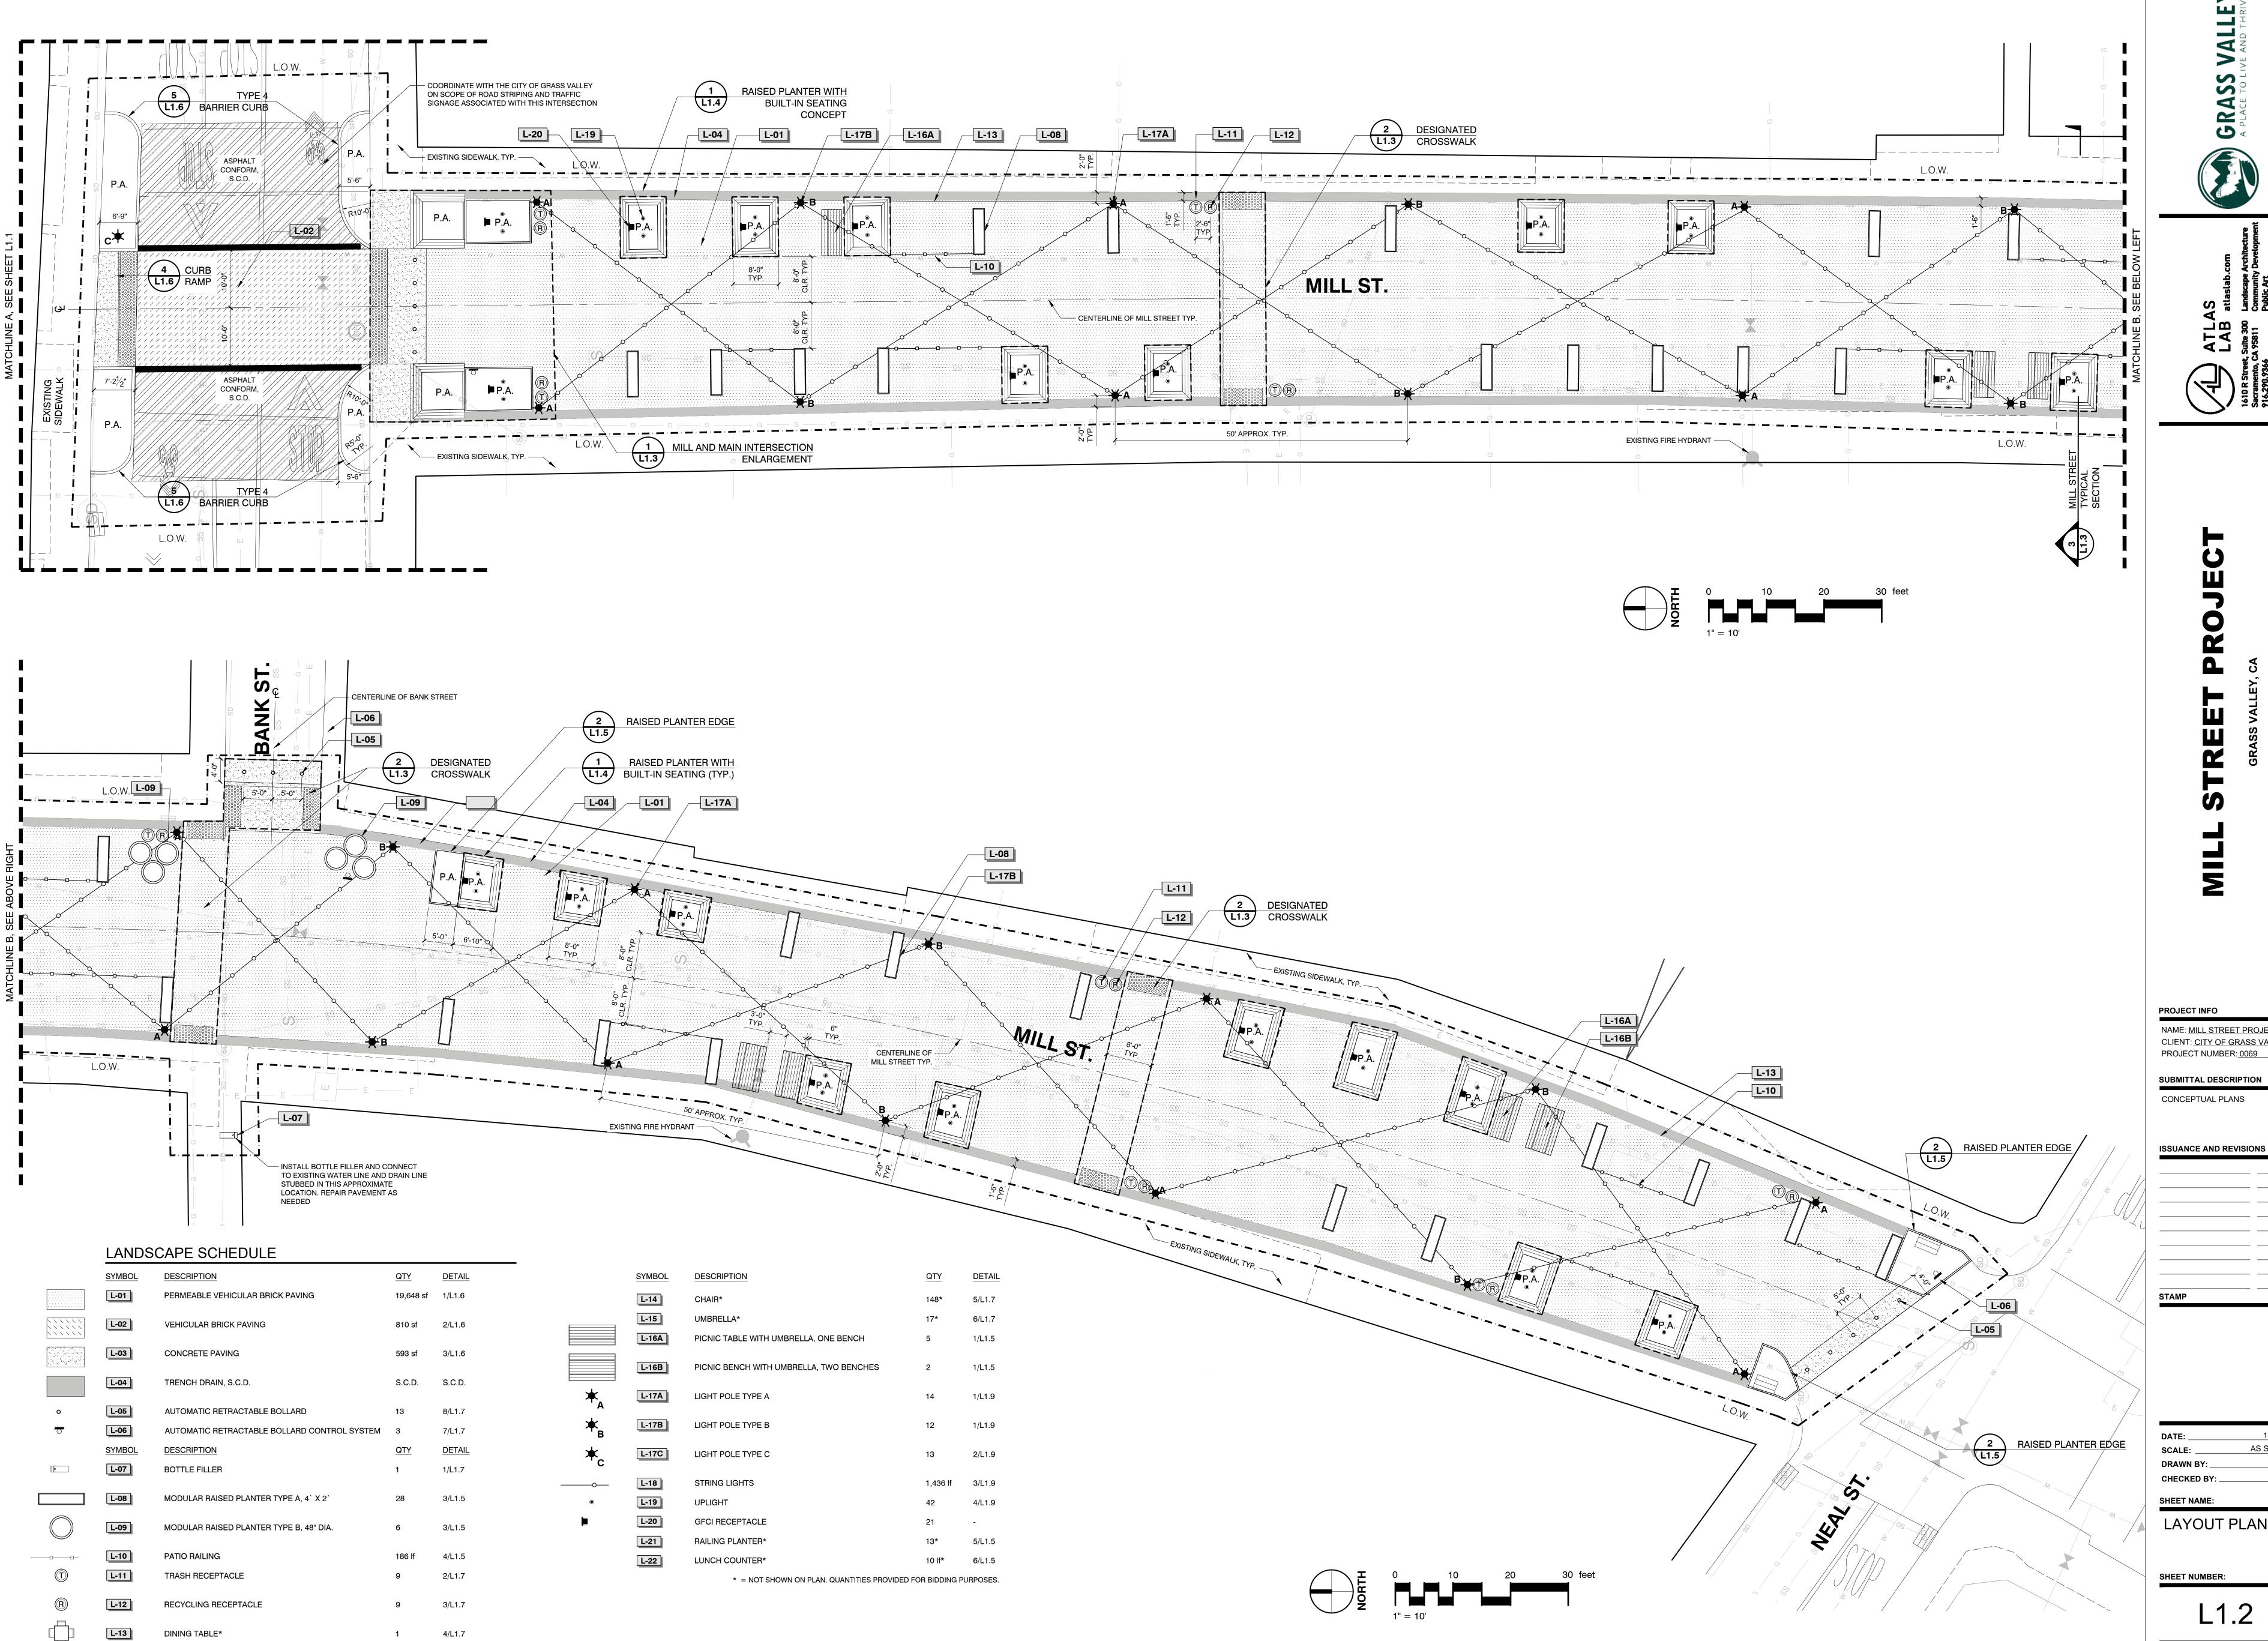

PROJECT INFO NAME: MILL STREET PROJECT CLIENT: CITY OF GRASS VALLEY PROJECT NUMBER: 0069

11.17.21 AS SHOWN CHECKED BY: \_\_\_\_

LAYOUT PLAN

SHEET NUMBER:

© COPYRIGHT 2021 ATLAS LAB INC.

STAMP

 DATE:
 11.17.21

 SCALE:
 AS SHOWN

 DRAWN BY:
 BCC

 CHECKED BY:
 EP

LAYOUT ENLARGEMENT PLANS

SHEET NUMBER:

PLAN

L1.3

© COPYRIGHT 2021 ATLAS LAB INC.

MILL AND MAIN ENTRY ENLARGEMENT

1/4" = 1'-0"

- G - G - G - G -

**L-17A** 

L-11

L-12

L-18

P.A.

1'-6"

P.A.

7'-3"

— CAST IN PLACE DETECTABLE WARNING

P.A.

P.A.


7'-3"

4'-0" TYP.

10'-0" CLR. TYP.

1 RAISED PLANTER WITH
BUILT-IN SEATING

2 RAISED PLANTER EDGE

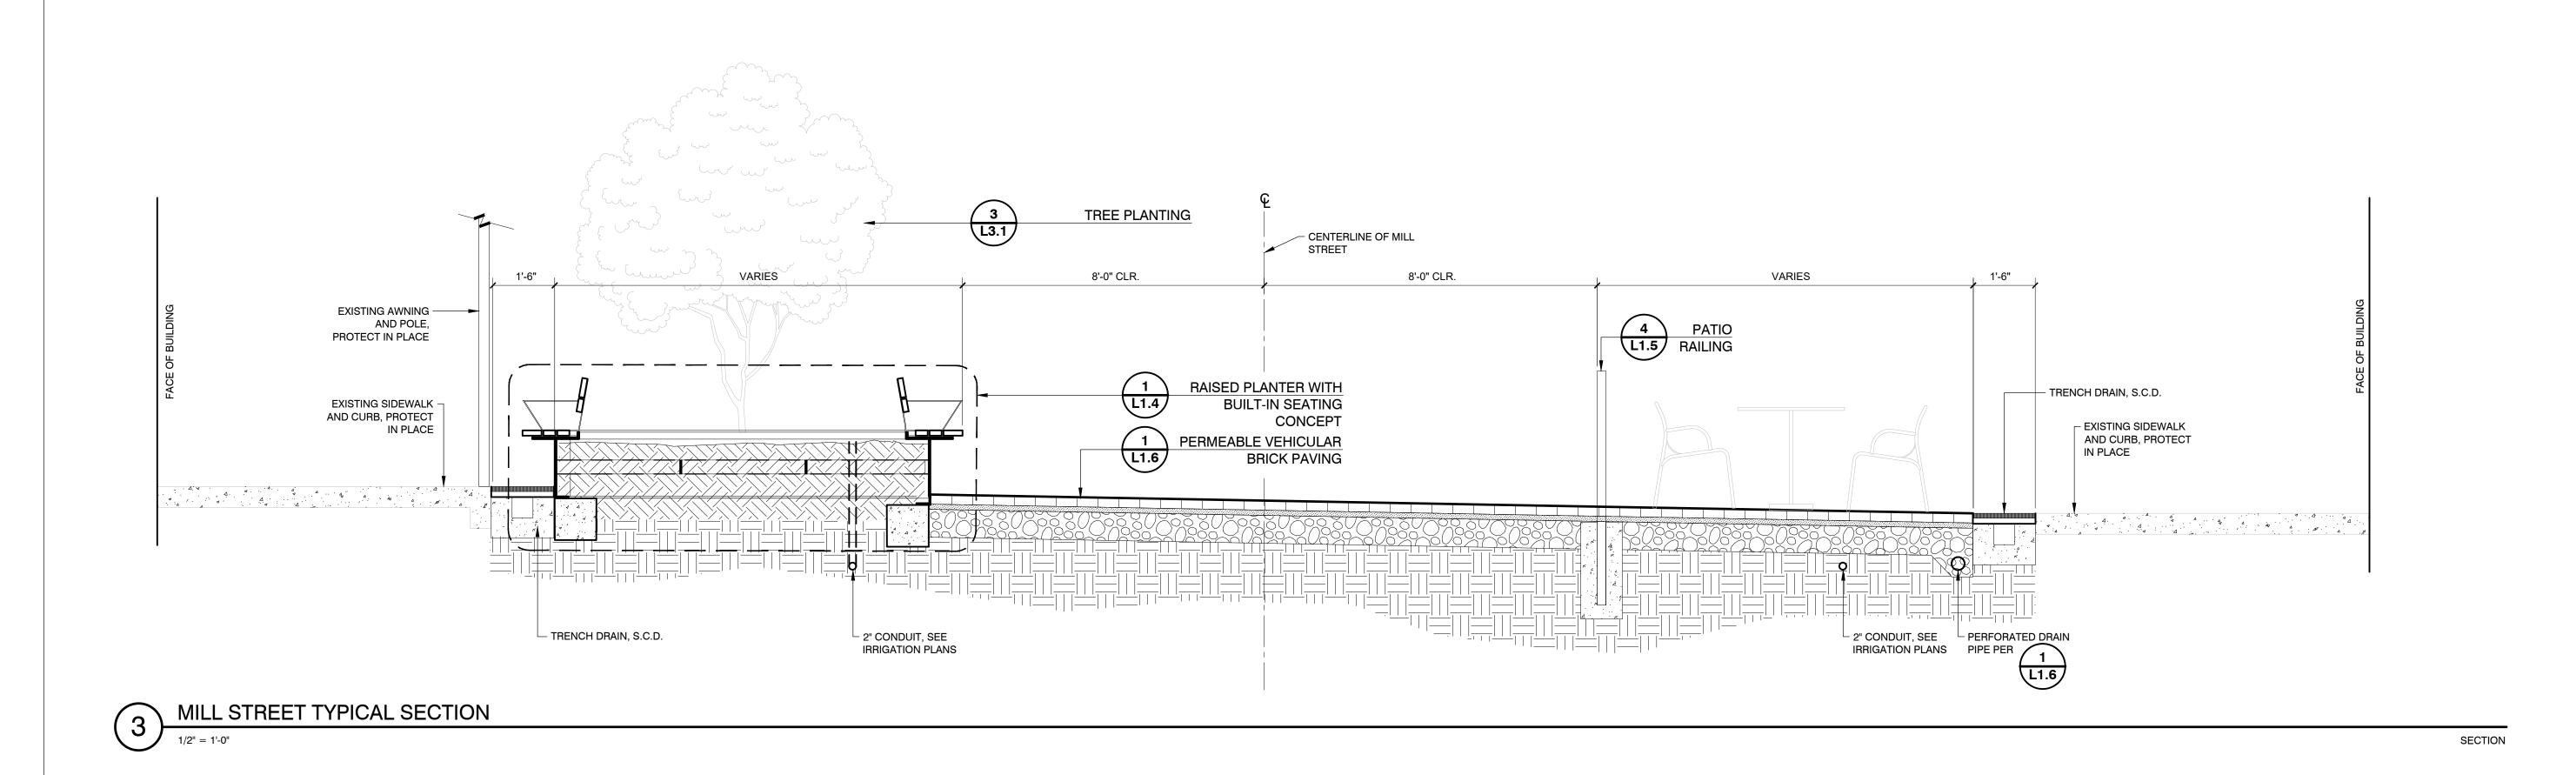

\_\_\_\_\_\_SD\_\_\_\_\_SD\_\_\_\_

COLORED EDGE
BHOWN AS BUT COLOR OF REAL WHITE COLOR OF REAL WHITE

VARIES, SEE LAYOUT PLAN

DESIGNATED CROSSWALK

1/4" = 1'-0"

SUBMITTAL DESCRIPTION

NAME: <u>MILL STREET PROJECT</u>
CLIENT: <u>CITY OF GRASS VALLEY</u>
PROJECT NUMBER: <u>0069</u>

**ISSUANCE AND REVISIONS** 

TAMP

 DATE:
 11.17.21

 SCALE:
 AS SHOWN

 DRAWN BY:
 BCC

 CHECKED BY:
 EP

SHEET NAME:

CONSTRUCTION


SHEET NUMBER:

P-CO-MIL-47

**DETAILS** 

L1.4

© COPYRIGHT 2021 ATLAS LAB INC.

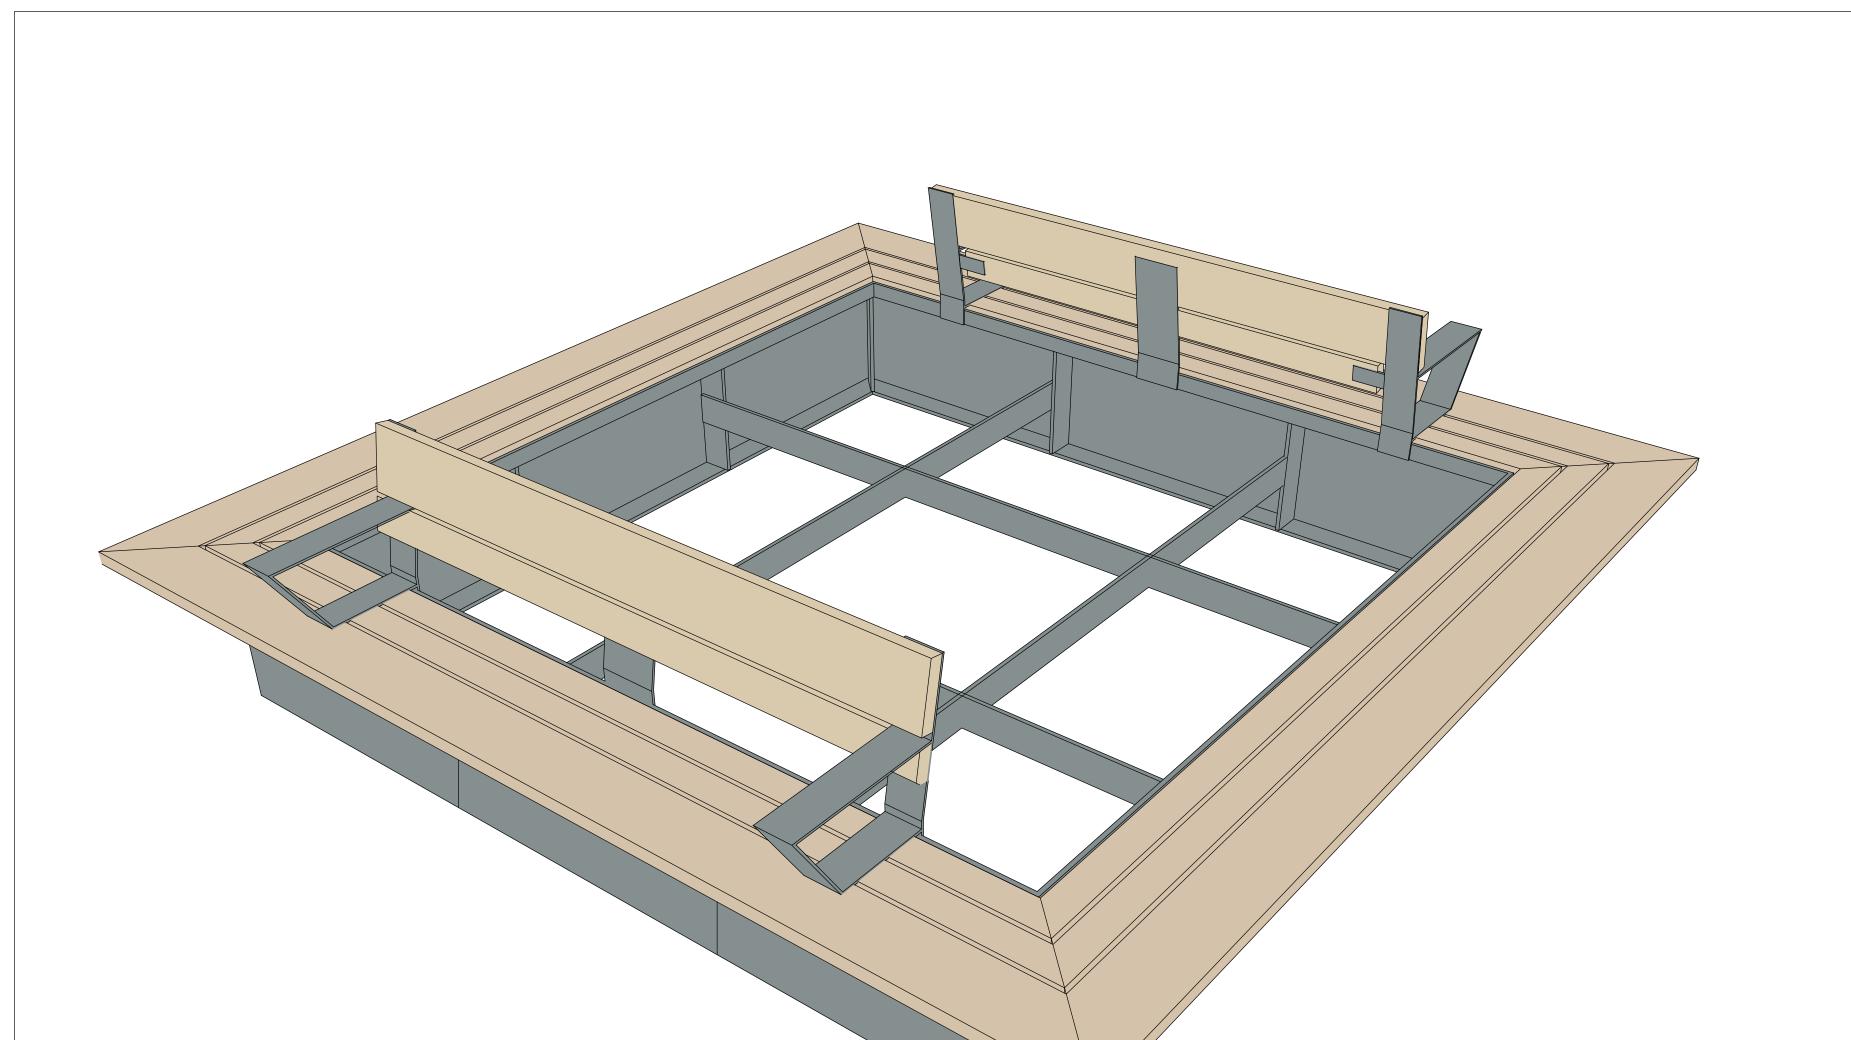

PLANTER PERSEPCTIVE

D CO MIL 46

WOOD BACK (MODIFIED WOOD PRODUCT, UNTREATED KEBONY OR EQUAL), BOLTED TO METAL FRAME.


METAL ARMREST BOLTED TO PLANTER FRAME.

POWDERCOAT FINISH COLOR RUST' TO MATCH MODULAR RAISED PLANTER TYPE A

WOOD BENCH SEAT (MODIFIED WOOD PRODUCT, UNTREATED KEBONY OR EQUAL), BOLTED TO METAL FRAME


WEATHERED STEEL PLANTER WALL, 1/4" THICK. WELDS AND SUPPORT BRACING 3-0" O.C.


RAISED PLANTER WITH BUILT-IN SEATING FRONT ELEVATION

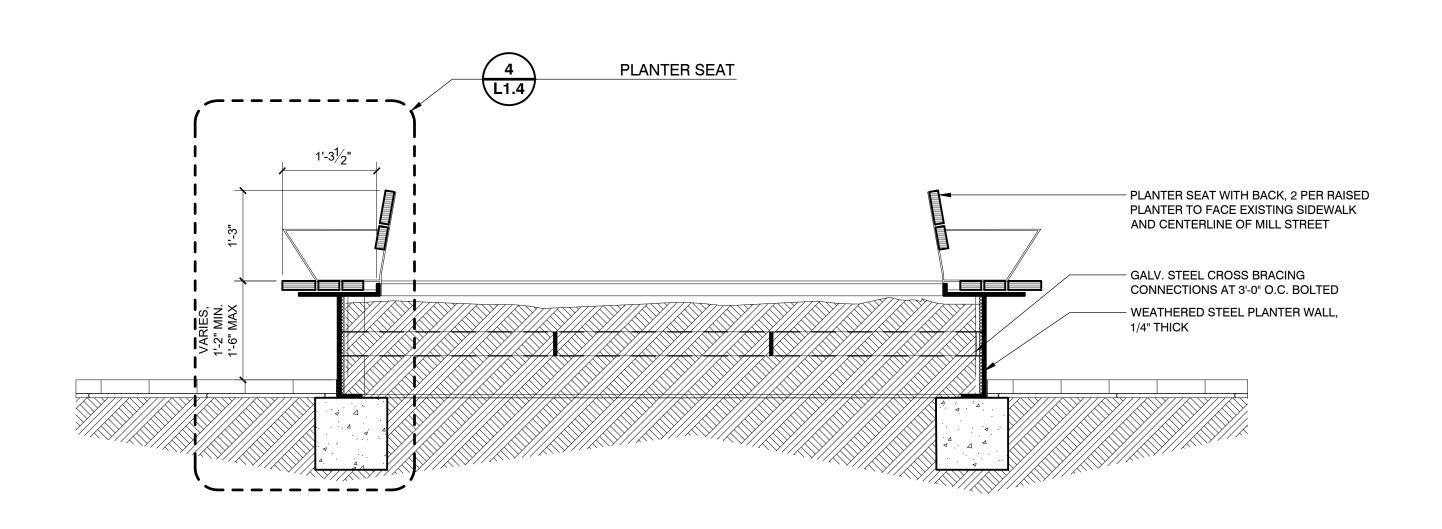

RAISED PLANTER WITH BUILT-IN SEATING SECTION

3/4" = 1'-0"

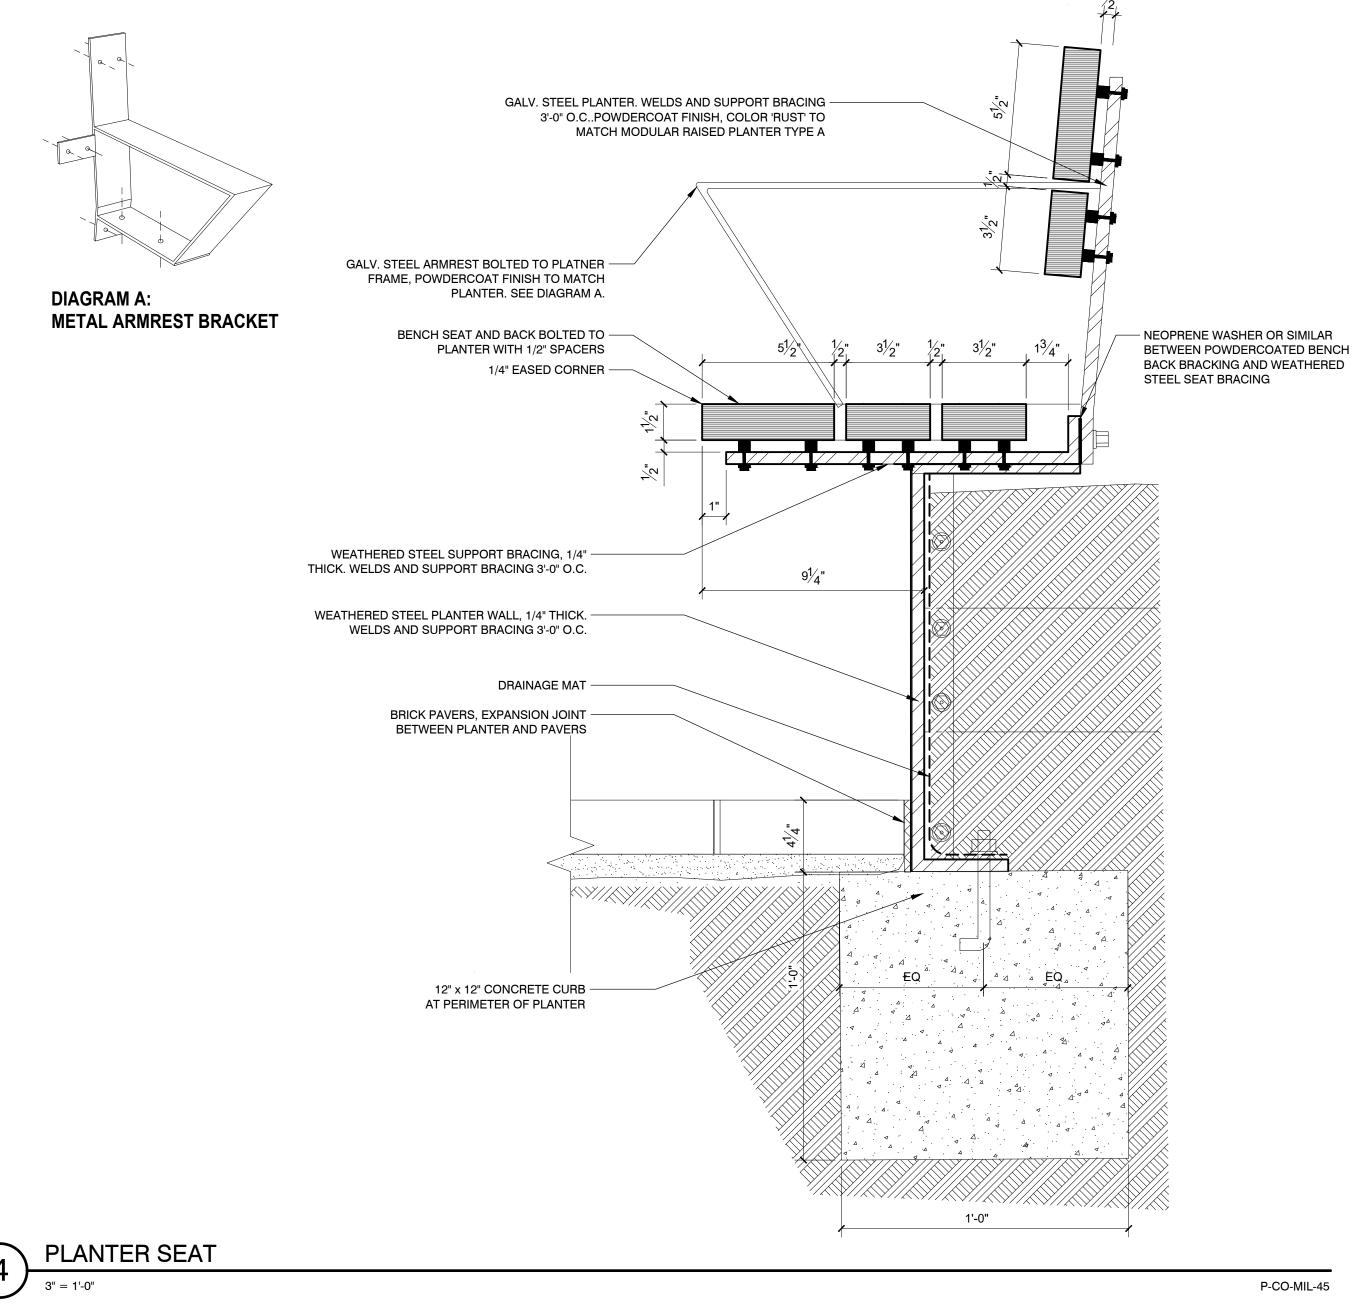

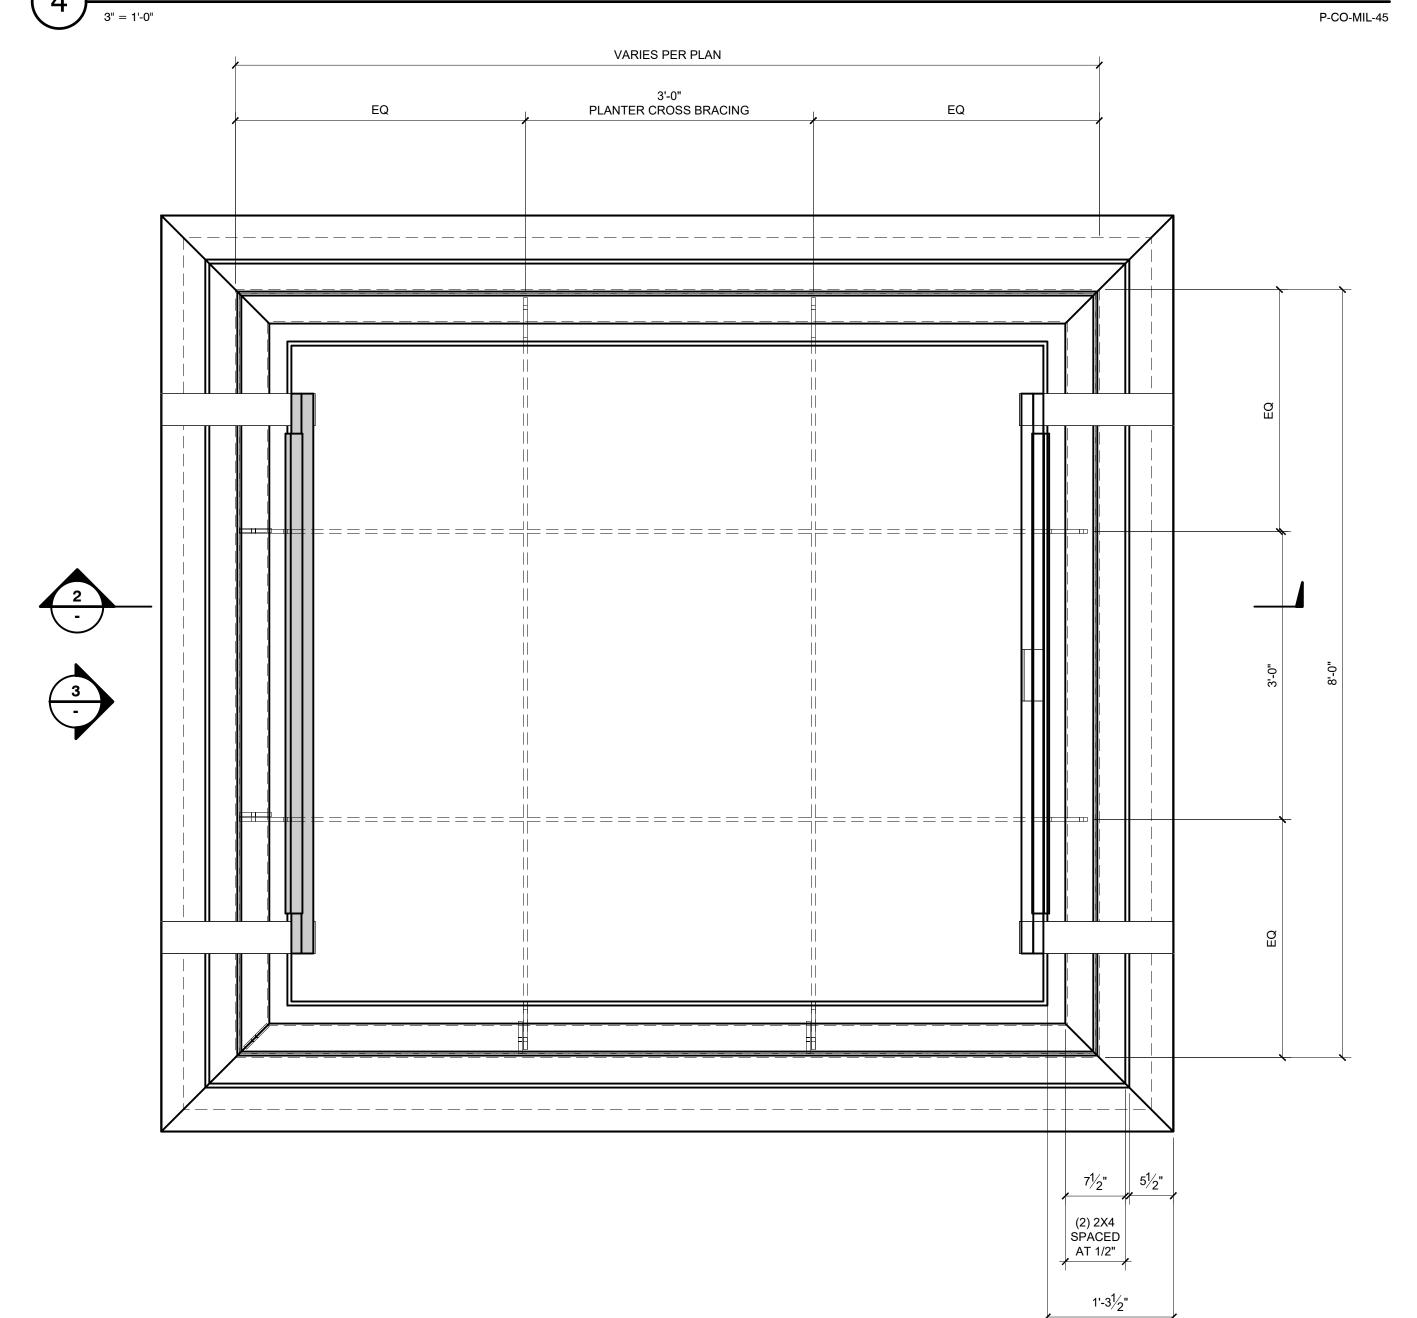

RAISED PLANTER WITH BUILT-IN SEATING CONCEPT

P-CO-MIL-48

P-CO-MIL-49

VARIES PER PLAN

6'-0" STANDARD FENCE PANEL

(TYP.)

P-CO-MIL-51

PATIO RAILING LINE —

PATIO RAILING PANEL -

POST PER SPECS

PER SPECS

2'-0" PANEL

AT ONE OR

**BOTH ENDS** 

NEEDED <sub>IJ.</sub>EQ

END POST PER

- RAISED PLANTER

SPECS

PER PLANS

- PAVING PER PLANS

- HOLD TOP OF FOOTING BELOW

WITH CAST-IN-PLACE TUBE STEEL SLEEVE TO FIT PATIO RAILING POST, EXTEND SLEEVE TO FINISH GRADE.

P-CO-MIL-29

WHERE

CLIENT: CITY OF GRASS VALLEY

CONCEPTUAL PLANS


11.17.21 SCALE: DRAWN BY: CHECKED BY:


SHEET NAME: CONSTRUCTION

SHEET NUMBER:

**DETAILS** 

© COPYRIGHT 2021 ATLAS LAB INC.

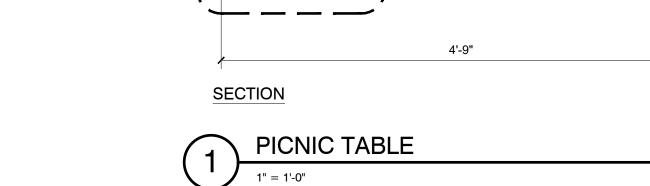

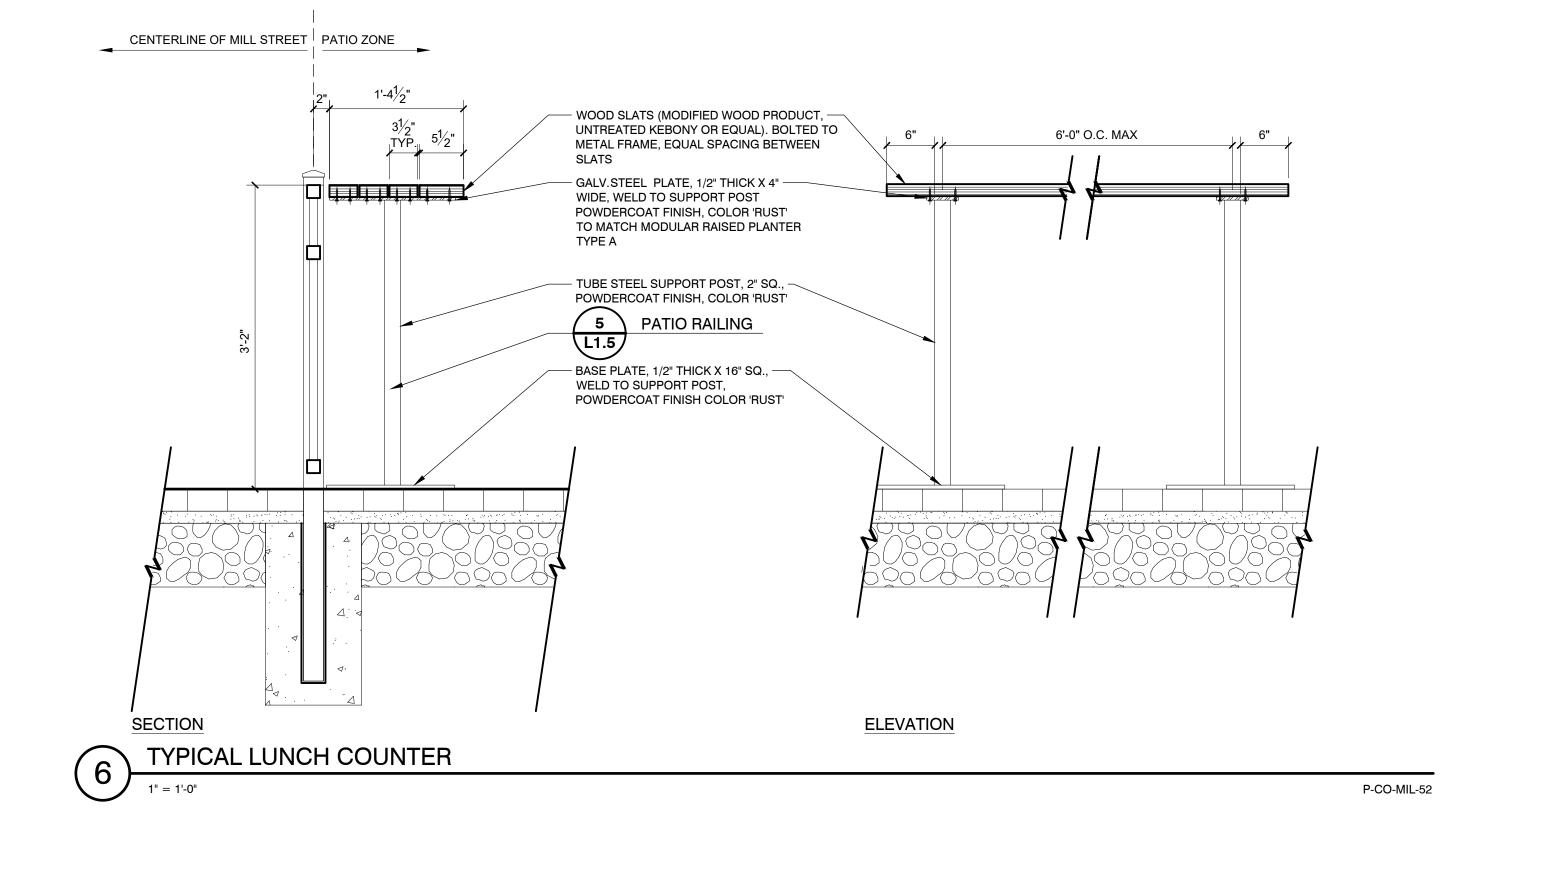

TYPICAL PLANTING -

L3.1 RAISED PLANTER TYPE A

PLANTER INSULATION ALONG INTERIOR

SIDES & BOTTOM OF POT, BY MFR

- MODULAR CONTAINER IRRIGATION SYSTEM, SEE IRRIGATION PLANS

- LYNGSO ROOF MIX, PER SPECS

 $^{-rac{3}{4}"}$  LIGHTWEIGHT LAVA DRAIN ROCK

- FILTER FABRIC ALONG BOTTOM OF PLANTER, EXTEND 4" UP SIDES


WATERPROOF MEMBRANE ALONG INTERIOR

– PLANTER, PER PLANS

SIDES, PER SPECS

DRAIN HOLE, BY MFR PAVING PER PLANS


- WOOD MULCH

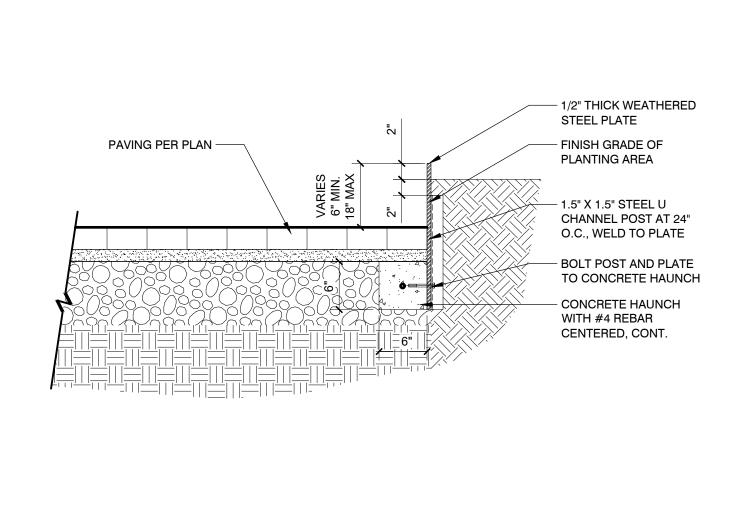





WIDTH PER PLANS



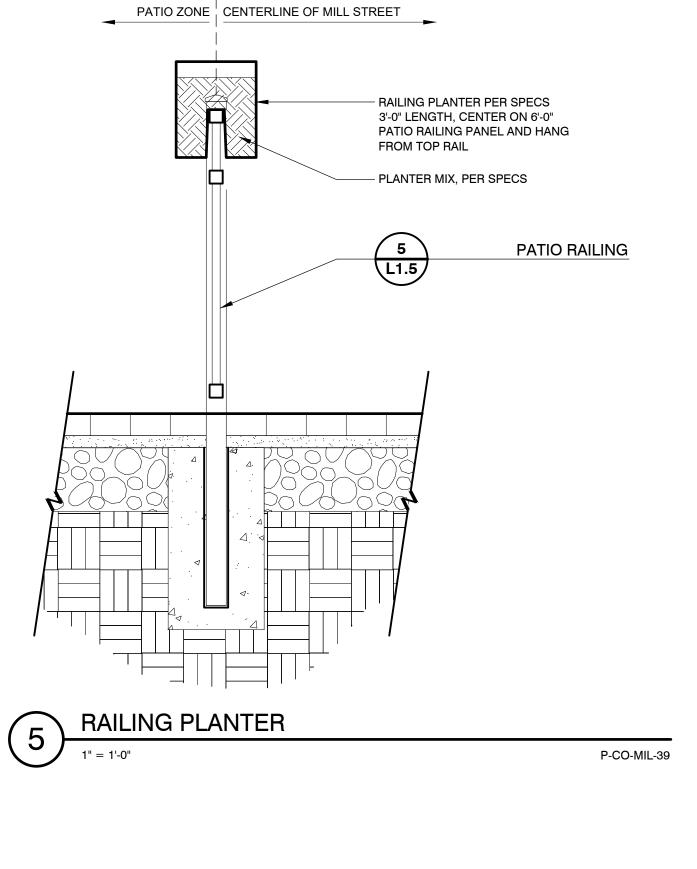

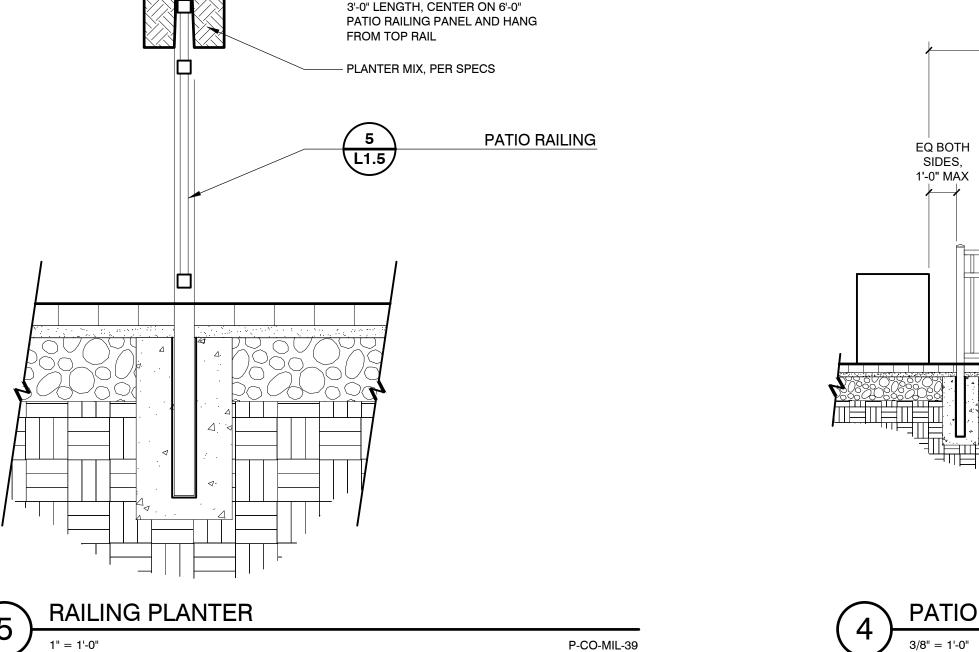

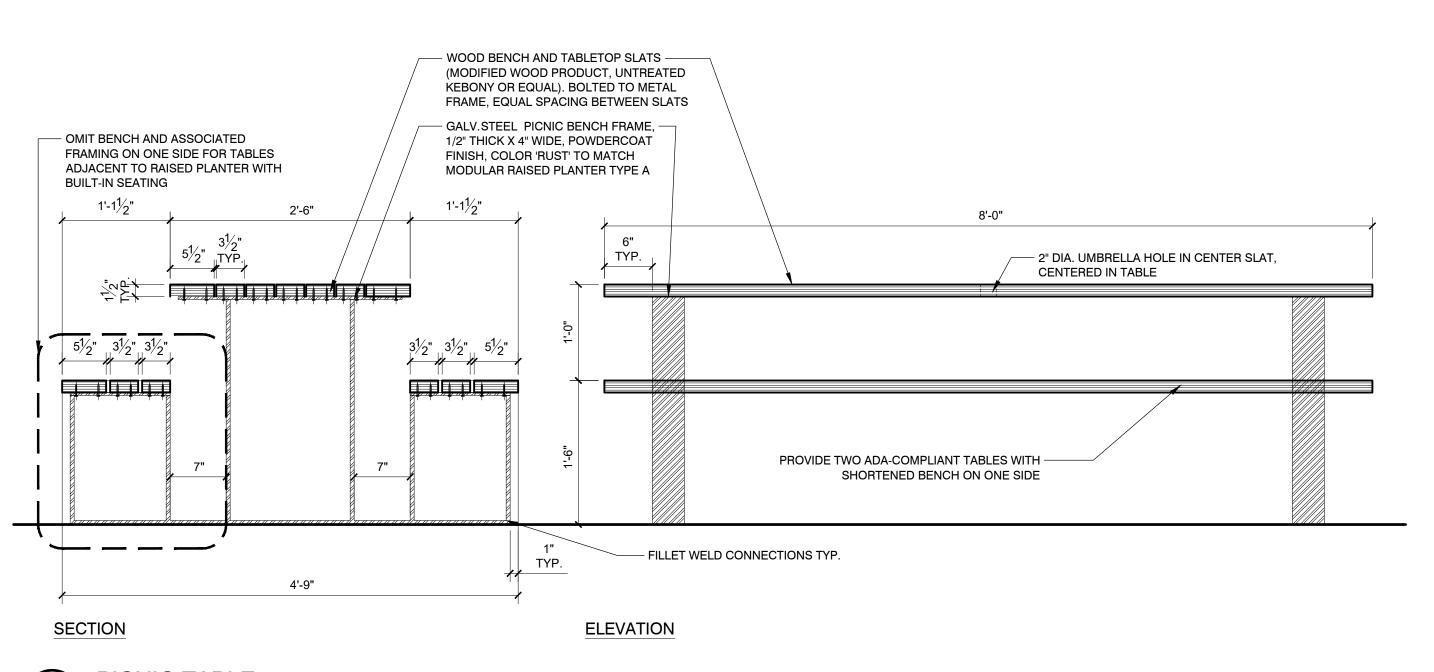

P-CO-MIL-41

— 1/16" MIN - 3/16" MAX SAND FILLED

8" X 4" X 2-3/4" PINE HALL BRICK PAVERS,

∕— 1-1/2" MAX. SAND BEDDING COURSE

- CRUSED GRAVEL BASE 3/4" TOP SIZE, 95% COMPACTED, ASTM D 2940

HERRINGBONE PATTERN, COLOR PER SPECS, OR

P-CO-MIL-02

JOINTS PER ASTM C33

8" MIN. DEPTH

- IMPERMEABLE LINER

STAMP

11.17.21 DATE: \_ AS SHOWN SCALE: DRAWN BY: CHECKED BY: SHEET NAME:

CONSTRUCTION **DETAILS** 

SHEET NUMBER:

© COPYRIGHT 2021 ATLAS LAB INC.

VEHICULAR BRICK PAVING

NOTE: PAVEMENT AND AGGREGATE BASE THICKNESSES PROVIDED ARE FOR BIDDING PUROSES ONLY. REFERENCE

PROJECT GEOTECHNICAL REPORT FOR PAVEMENT SECTIONS.

LANDSCAPE AREA

PUBLIC WORKS DEPARTMENT

ENGINEERING DIVISION

BARRIER CURB AND

**VALLEY GUTTER** 

P-CO-MIL-42

PUBLIC WORKS DIRECTOR / CITY ENGINEER

DRAWN BY: EAD

4", SEE NOTE 1


TYPE 4 BARRIER CURB

ADJACENT TO IRRIGATED AREAS

1. TYPE 4 CURB TO BE 18" TALL OR 4" DEEPER THAN THE STREET SECTION, WHICHEVER IS GREATER.

2. LANSCAPE AREA TO BE SLOPED TO DRAIN TO AN APPROVED DRAINAGE OR FIELD INLET

CONCRETE CURB —

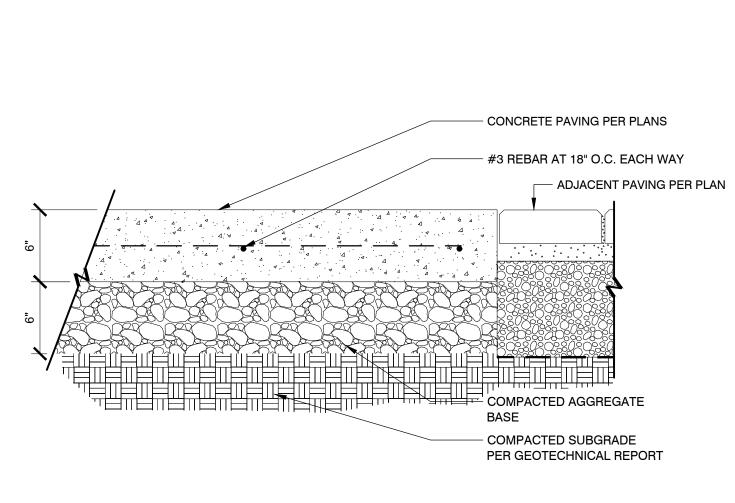

NOTE: PAVEMENT AND AGGREGATE BASE THICKNESSES TO BE DESIGNED AND CONSTRUCTED BY DESIGN BUILD CONTRACTOR.

#4 REBAR 3' O.C. 8" MIN. LENGTH ~

ADJACENT TO UNIRRIGATED AREAS


VALLEY GUTTER


TYPE 4 BARRIER CURB

CITY STANDARD DETAIL

#4 GRADE 60, REBAR CONTINUOUS 18" ON CENTER

6" A.B. COMPACTED TO 95%



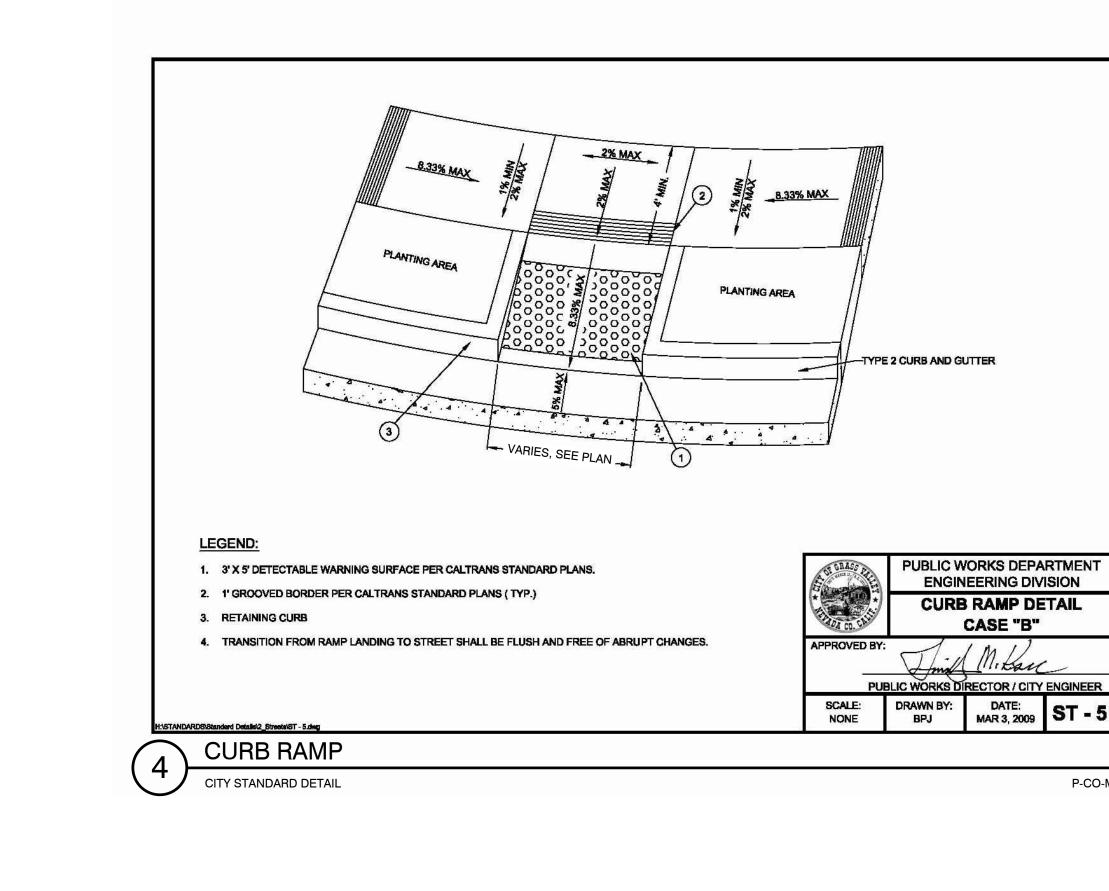


TRENCH DRAIN, S.C.D. AND PER PLANS

PERFORATED DRAIN PIPE WRAPPED IN NON-WOVEN

GEOTEXTILE SOCK

PERMEABLE VEHICULAR BRICK PAVING

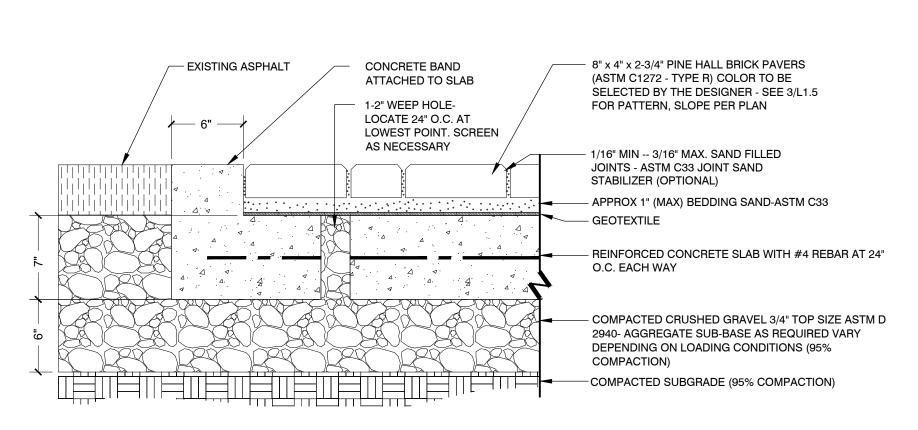

NOTE: PERMEABLE PAVEMENT AND AGGREGATE BASE THICKNESSES TO BE DESIGNED AND CONSTRUCTED BY DESIGN BUILD CONTRACTOR.

CLIENT: <u>CITY OF GRASS VALLEY</u> PROJECT NUMBER: 0069

STAMP


Edition 02


P-CO-MIL-58

11.17.21 AS SHOWN SCALE: DRAWN BY: **CHECKED BY:** 

SHEET NAME: SITE **FURNISHING** CUTSHEETS

© COPYRIGHT 2021 ATLAS LAB INC.

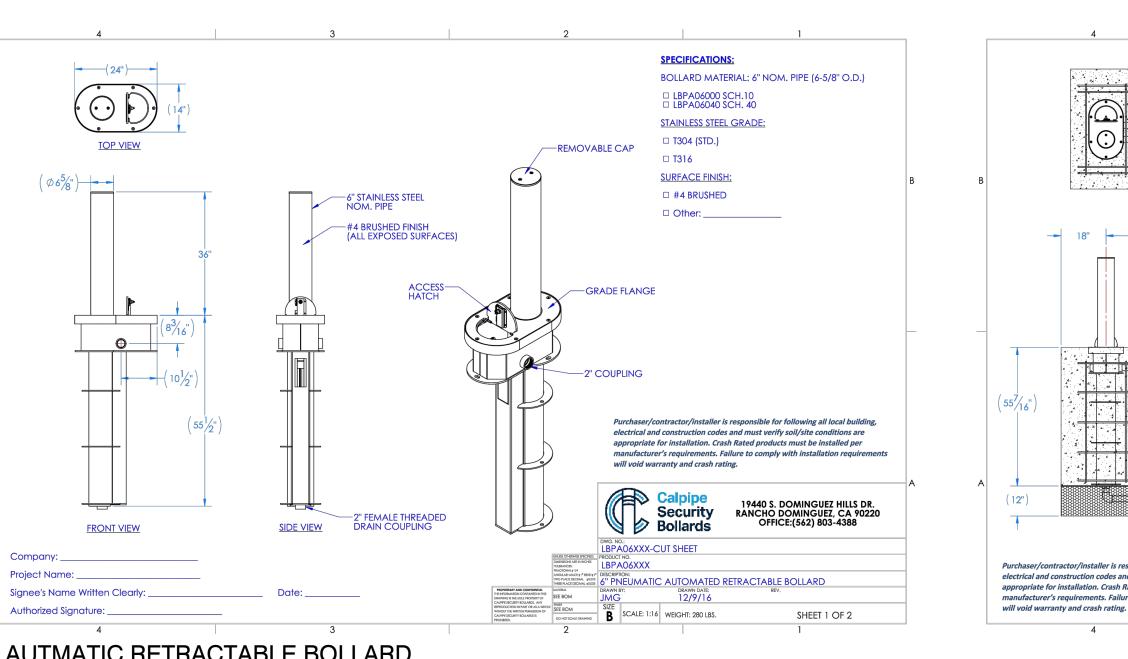

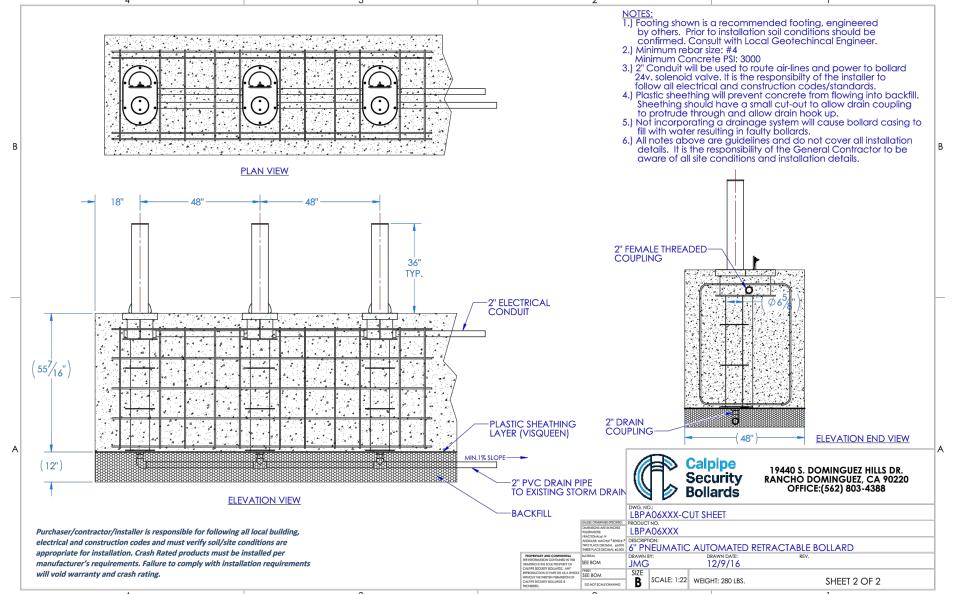

AUTMATIC RETRACTABLE BOLLARD

AIR-COMPRESSOR ® SOLENOID PLUG WIRES:— SEE DWG# XXXXXXXX REF, TB5, TB6, TB7 & TB8 BOLLARD MODEL# LBPAXXXXX

AUTOMATIC RETRACTABLE BOLLARD CONTROL SYSTEM

Ø2 1/2"

GRADE

Tables Catena 30in square Top, Powdercoated, No Umbrella Hole, Catena Freestanding Support

Drawing: CT5404
Dimensions are in inches [mm]

DINING TABLE

1" = 1"

P-CO-MIL-65

Replacement Parts
Black Plastic Liner

<u>Decals</u> Trash w/Logo-White

Date: 12/18/2017

www.landscapeforms.com Ph: 800.521.2546

P-CO-MIL-61

211 North Lindbergh Blvd. St. Louis, MO 63141 800.231.1327 tel. | 314.754.0835 fax specify@anovafurnishings.com anovafurnishings.com 40-gallon steel slat recycler with contour top, plastic liner, rubber feet and optional recycle

decal (when specified) The recycler is 43.60" tall and is composed of 10-gauge slotted steel with a .63" gap vertical slotted pattern. The side door features a full-length, heavy-duty steel hinge and a tamper-resistant cam lock and key system. The recycler has two 5" high and 5" wide recycle openings located on opposite sides of each other. The contour top is made of 16-gauge galvannealed steel. Optional decals are available. Choose "Bottles/Cans" with recycling logo, "Mixed Recycling" with recycling logo or "Trash" decal—custom decals also available. Specify black or white lettering. Decals will be factory installed and The receptacle is designed to be portable for flexibility in placement or surface mounted using pre-drilled adjustable to assist in leveling the receptacle. The reusable plastic liner is made of high-density polyethylene. Fade-resistant, powder coated steel features a state-of-the-art primer proven to prevent rusting. Treated

components exceed the industry standard by 34% in testing by independent sources. See website or sales representative for color choices. he product is virtually maintenance-free and requires only periodic cleaning with a sponge and a mild detergent and water solution to remove surface dirt. Do not clean with solvent or petroleum base products. 20-year limited structural warranty with 7-year finish warranty against fading: 3-year finish warranty on powder coated steel components against rusting, peeling, chipping, cracking, mold, mildew and defects in materials and/or workmanship. See full details on multi-year warranties for components at

 
 Decais
 DEC2000

 Trash w/Logo-White
 DEC2002

 Bottles/Cans w/Logo-White
 DEC2008

 Bottles/Cans w/Logo-Black
 DEC2010

 Mixed Recycling w/Logo-Wht
 DEC5000
 Mixed Recycling w/Logo-Blk DEC5002 ◆ Ø24.00" ► SIDE VIEW FRONT VIEW

Max Units Pallet Size/Wt.
Per Pallet (32" x 48") 137 lbs./unit 39 cu. ft.

RECYCLING RECEPTACLE P-CO-MIL-60


TRASH RECEPTACLE P-CO-MIL-59




The Saule P50 umbrella is a single pole umbrella with a beautiful, modern design for commercial applications. Light and easy to use, the P50 is made from anodized aluminum and comes with two base options, a floor plate that can be anchored to the ground, or an aluminum base that can be filled with sand for added stability. The P50's fabric canopy is 100% Olefin that is water and oil resistant,

breathable, durable, and rated UPF80 for exceptional sun protection. It comes standard with a protective cover.


Saule P50 —

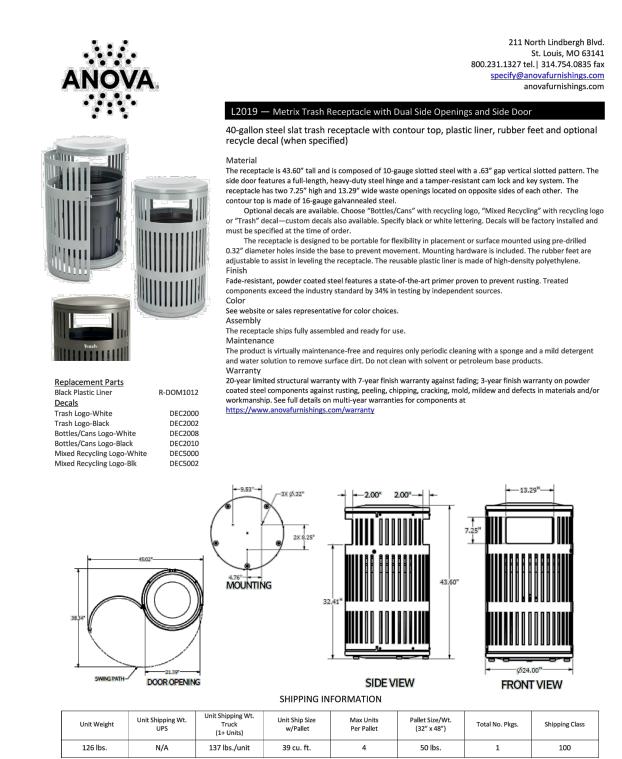



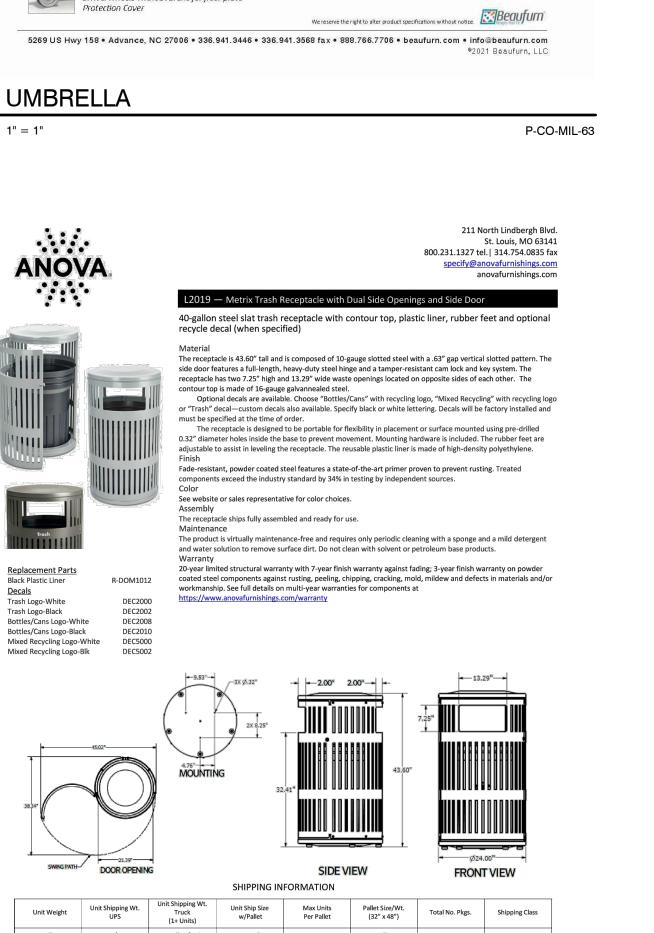



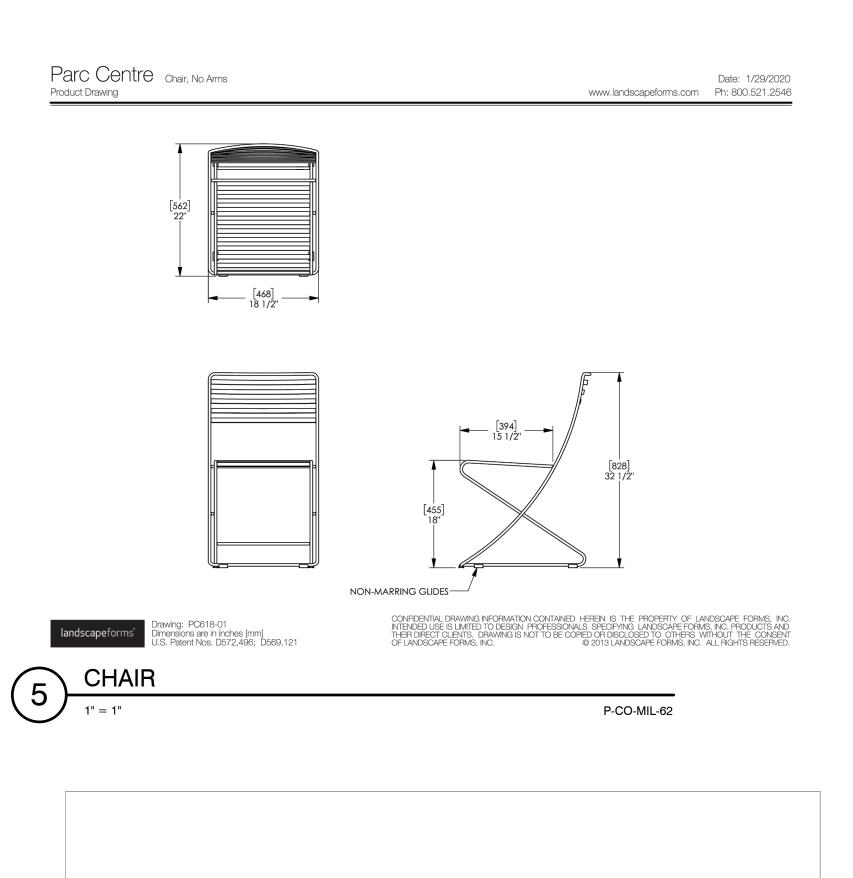

metalco Fuente - Collezione Colore design raffaele lazzari

P-CO-MIL-66

PROJECT NUMBER: 0069

CHECKED BY: SHEET NAME: LIGHTING

**DRAWN BY** 

PLAN

© COPYRIGHT 2021 ATLAS LAB INC.



Pole Lighting Only - Plan View - Scale: 1" = 25'-0"

### Luminaire Schedule LLF Lumens Watts ANP Lighting - LA142-1-CL-P117LD4D-T5-xxK 0.903 | 14333 | 117

### NOTES:

- 1. The luminaire fixture types and part numbers included on the schedule above are for photometric purposes only and may need to be revised for real world conditions. Please refer to the manufacturer specification sheets and make sure to confirm voltages, finishes, mounting options, dimming and control options, accessories, etc. before specifying and/or ordering the fixtures.
- 2. LLF = Light Loss Factor = Lamp Lumen Depreciation (LLD) x Lamp Dirt Depreciation (LDD) =  $0.95 \times 0.95 = 0.90$
- 3. The "MH" tag beneath the fixture type designations shown in plan view indicates fixture mounting height AFG (above finished grade).

Illuminancr Calculation Summary						
Calculation Grid Description	Units	Avg	Max	Min	Avg/Min	Max/Min
Street and Sidewalks	Fc	5.70	9.7	0.4	14.25	24.25



### Rendering



Plan View Rendering

GFI-WPU

4-SIDED LANTERN

▼ T.B.D. ►

PLANTER ARM

GFI-WPU

B5S20.188

OPPOSITE-SIDE HAND HOLE FOR PLANTER IRRIGATION (OTHERS)

BOLT-DOWN Ø5" SMOOTHRAIGHT POLE LENGTH = 20'-0" 0.188" WALL THICKNESS

DO NOT INSTALL POLES WITHOUT LUMINAIRES

DUNCAN

P-CO-MIL-67

LA1421CLP117LD4DT5XXKCHF

BD5S20.188 CCS1201

20A GFCI OUTLET WITH WATERPROOF IN-USE COVER (TYPE A ONLY)

OPPOSITE-SIDE HAND HOLE

2-PIECE CAST ALUMINUM CLAMSHELL

SECURITY CAMERA

CONCRETE FOOTING -

ANCHOR BOLTS (4)

LIGHT POLE TYPES A AND B

PA515

CAST ALUMINUM POST ARM

20A GFCI OUTLET WITH WATERPROOF IN-USE COVER

18 1/4"


11.17.21 DATE: \_ AS SHOWN SCALE: DRAWN BY: CHECKED BY:


SHEET NAME: LIGHTING CUTSHEETS


SHEET NUMBER:


© COPYRIGHT 2021 ATLAS LAB INC.




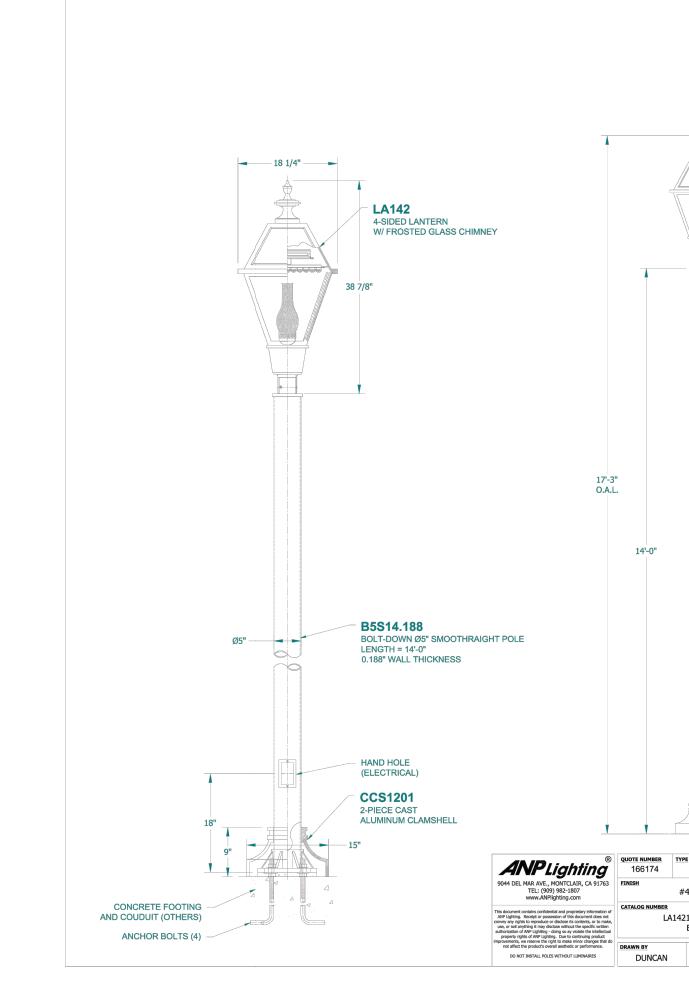

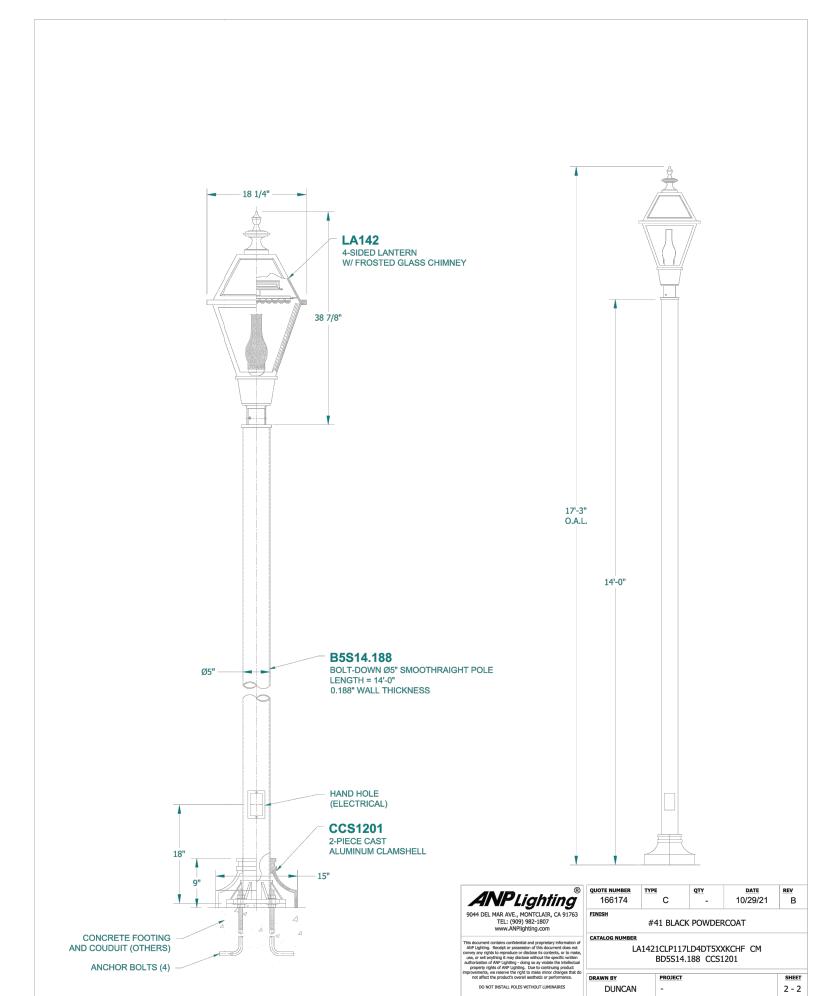

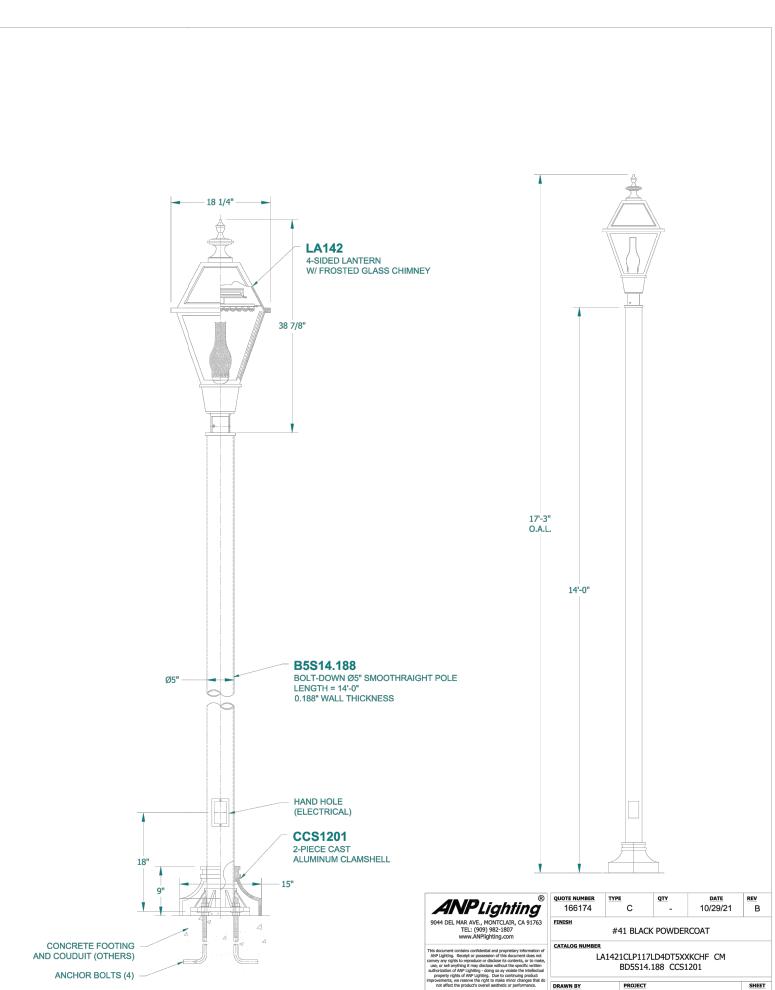

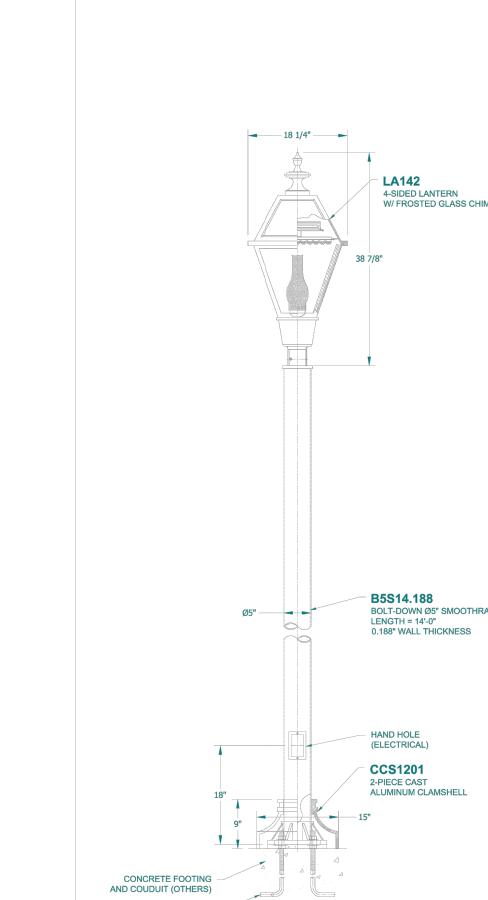


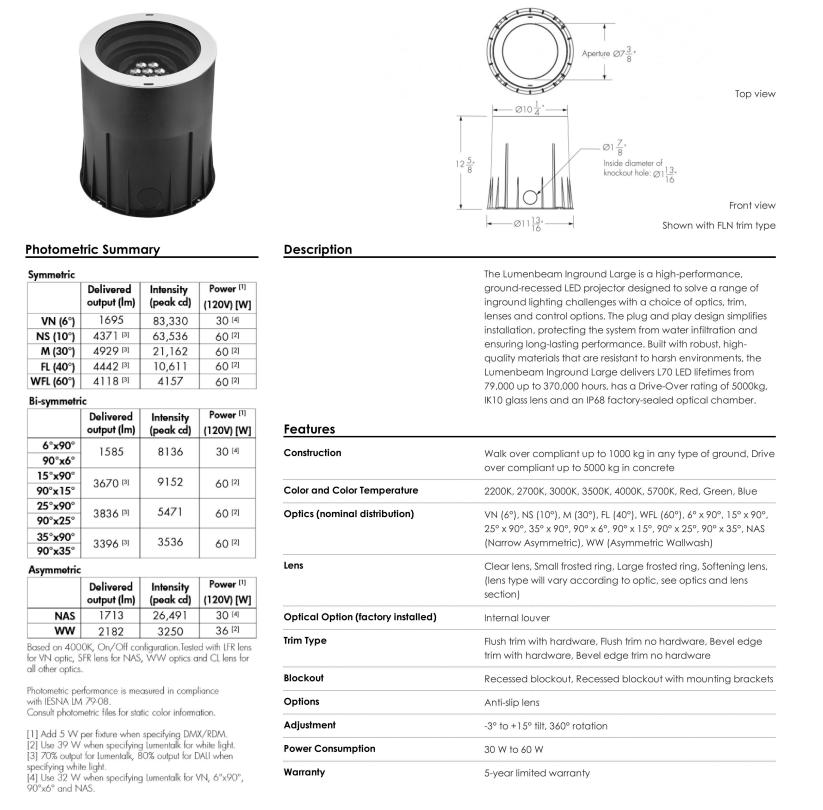


1220 Marie-Victorin Blvd., Longueuil, QC J4G 2H9 CA info@lumenpulse.com www.lumenpulse.com www.lumenpulse.com www.lumenpulse.com/products/2061 F 514.937.6289

P-CO-MIL-71

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately 2021.08.09 copyright © 2021 LMPG Inc.

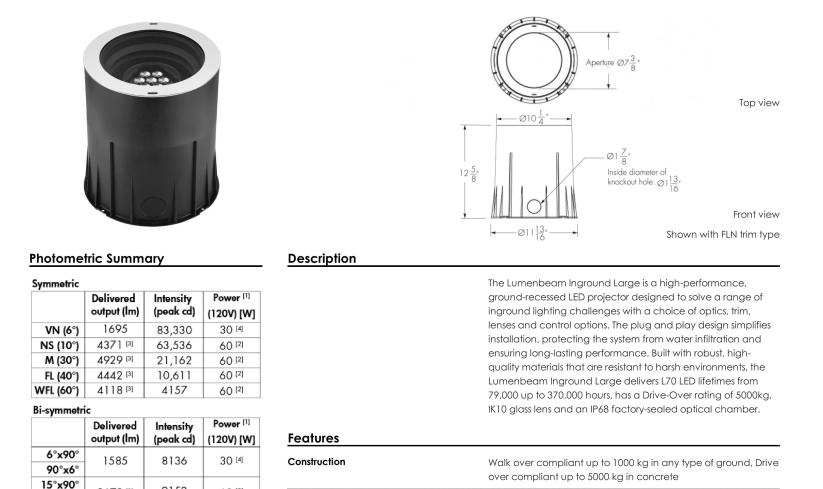


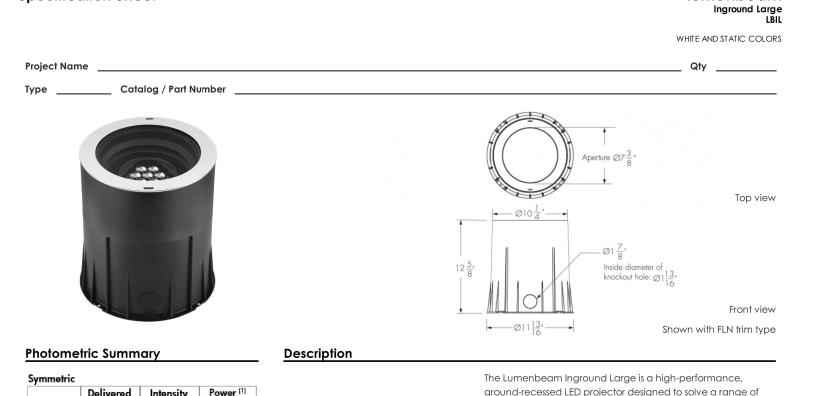



Specification Sheet

lumenpulse<sup>™</sup>

**UPLIGHT** 

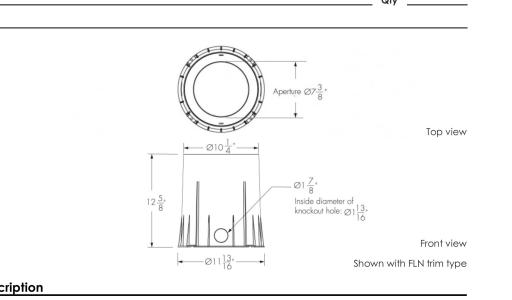

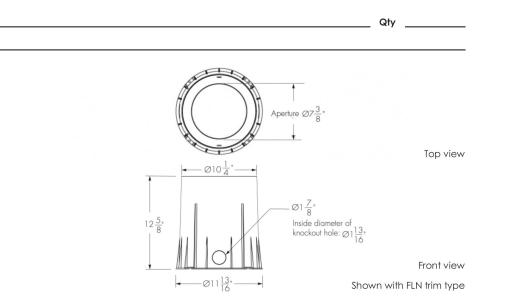

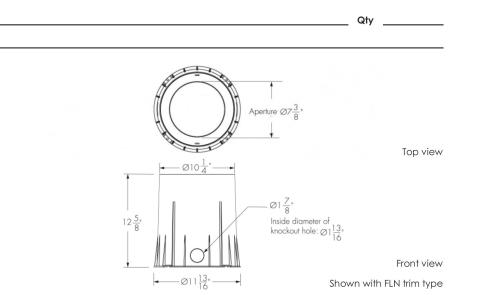

lumenbeam



lenses complete the architectual design.



SUSPENDED DECORATIVE STRINGLIGHT SYSTEMS



Decostrings are a perfect accent lighting solution to add a personal ambience to patios, courtyards, atriums, restaurants, amusement parks and any open area. The "festoon" lighting system is typically strung between two anchorage points with optional intermediary support and electrically fed from one end. The sockets can be either symmetrically spaced or randomly spaced to suit the application. Optional shades, guards and

SPECIFICATIONS LAMPHOLDER Black phenolic, medium base UL weatherproof with hook for optional mounting. 12/2 G. Black flexible duplex cable, UV rated for extended outdoor use. POWER CORD SUPPORT CABLE 3/32" SS aircraft catenary cable supports the system, 980# test. Heavier cable available.

TERMINATION KITS Heavy duty stainless steel hardware available. Wet location rated LED and incandescent medium base A, G or S style lamps. Dimmable to 10% with ELV trailing edge type dimmers. DIMMING VOLTAGE 120V system (1920 watts max load). No driver or transformer required. ACCESSORIES

Optional brass, aluminum and acrylic shades. Consult factory for custom shades. Bare lamp and shielded "BUG" rated .IES files available.

ETL listed for permenant damp or wet installations. 2001431 MADE IN THE USA

STK SELECT FROM STANDARD PAGE 3 PAGE 4 & 5 TERMINATION KIT LTK LEAVE BLANK LIGHTWEIGHT TERMINATION KIT TURNBUCKLE KIT

LIGHT FIXTURE TYPE C P-CO-MIL-68

3570 LEXINGTON AVE. EL MONTE, CA 91731 • PH. 626.442.4600 • primuslighting.com P-CO-MIL-70

SYMBOL	MANUFACTURER/MODEL	2	021-10 PSI	)-13 10:2 GPM
401	Hunter RZWS-18-CV 25, 2 per symbol on opposite sides of root b	oall	40	0.50
SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY		
	Hunter ICZ-101-40-LF Drip Control Zone Kit. 1" ICV Globe Valve with 1" HY100 filter system. Pressure Regulation: 40psi. Flow Range: .5-15 GPM. 150 mesh stainless steel screen.	4		
•	Pipe Transition Point above grade Pipe transition point from PVC lateral to drip tubing with riser to above grade installation.	26		
	Area to Receive Dripline Netafim TLCV-04-12 Techline Pressure Compensating Landscape Dripline with Check Valve. 0.4 GPH emitters at 12" O.C. Dripline laterals spaced at 12" apart, with emitters offset for triangular pattern. 17mm.	1,300 s.f.		
SYMBOL	MANUFACTURER/MODEL/DESCRIPTION			
•	Hunter ICV-G 1" Plastic Electric Remote Control Valves, Globe Configuration, with NPT Threaded Inlet/Outlet, for Commercial/Municipal Use.			
HB	Buckner-Superior HB2F 3/4" x 3/4" Female NPT Red Brass Hose Bibb.			
MV	Hunter IBV 1" 1" Brass Electric Master Valve, Globe Configuration, with NPT Threaded Inlet/Outlet, for Commercial/Municipal Use.			
BF	Febco 825Y 1-1/2" Reduced Pressure Backflow Preventer			
C	Hunter IC-1200-M Modular Controller, 12 stations, Outdoor Model, Metal Cabinet. Commercial Use. With one ICM-600 module included.			
FS	Hunter FLOW-CLIK-100 Flow Sensor SOV with Interface Panel, 1" Schedule 40 Sensor			

Body, 24 VAC, 2 amp, install Interface Panel as required.

Pipe Sleeve: PVC Schedule 40, size to be 3x total pipe diameter within sleeve

DESCRIPTION

Modular Raised Planter Type B

Conduit for future sound system: 2" PVC Schedule 40

Valve Callout

Valve Numl

Valve Flow

Valve Size



Modular Container Irrigation System Type A
CWM R1114-4k 4-module small 11" square be

Irrigation Lateral Line: PVC Schedule 40

Irrigation Mainline: PVC Class 315 SDR 13.5

CWM R1114-4k 4-module small 11" square back reservoirs, linear configuration, 4 sets for each Modular Raised Planter Type A

Modular Container Irrigation System Type B

CWM 2914-2k 2-module large 29" round back reservoirs, 1 set for each

QTY DETAIL

432 sf

### **IRRIGATION NOTES**

- 1. IRRIGATION SYSTEM IS DESIGNED FOR A MINIMUM OF 10 G.P.M. AND 95 PSI STATIC PRESSURE AT THE SERVICE LINE. VERIFY PRESSURE OF 95 P.S.I. AT THE SERVICE LINE PRIOR TO BEGINNING INSTALLATION OF THE IRRIGATION SYSTEM.
- NOTIFY CITY REPRESENTATIVE SIX (6) DAYS PRIOR TO INSTALLATION FOR A
  PRE-INSTALLATION CONFERENCE AND FIELD REVIEW COORDINATION FOR TRENCH
  DEPTHS, ASSEMBLY REVIEW, PRESSURE TESTS, OPERATIONAL TESTS, PREMAINTENANCE AND FINAL REVIEWS. A CONTINUITY TEST WILL BE REQUIRED FOR
  CONTROL WIRE STUBOUTS.
- 3. INSTALL CONTROLLER ASSEMBLY. EXACT LOCATION OF CONTROLLER TO BE DETERMINED AT JOBSITE BY CITY REPRESENTATIVE. 120 VOLT ELECTRICAL SUPPLY IS PROVIDED IN IMMEDIATE VICINITY BY ELECTRICAL SECTION OF CONTRACT. MAKE FINAL 120 VOLT ELECTRICAL CONNECTION TO CONTROLLER. USE THIN WALL METAL CONDUIT ABOVE GRADE. PROGRAM CONTROLLER TO NOT EXCEED MAXIMUM FLOW RATE STATED IN NOTE NO. 1. INSTALL PER MANUFACTURERS SPECIFICATIONS. CONTROLLER SHALL BE PROPERLY GROUNDED PER ARTICLE 250 OF THE NATIONAL ELECTRIC CODE AND CONFORM TO LOCAL REGULATIONS. INSTALL AS DETAILED. SEAL CONDUIT HOLES WITH SILICONE OR ACCEPTED SUBSTITUTE. CARE SHALL BE TAKEN TO PREVENT RUNOFF OF WATER AND SLOPE/SOIL EROSION DUE TO PROLONGED APPLICATIONS OF WATER. PROGRAM CONTROLLER PER MANUFACTURERS WRITTEN SPECIFICATIONS TO PROVIDE PROPER AUTOMATIC WEATHER BASED SCHEDULE ADJUSTMENTS.
- 4. INSTALL EQUIPMENT AS DETAILED. INSTALL R.C.V. ID TAGS MANUFACTURED BY T. CHRISTY ENT. STANDARD SIZE, 1 1/8" HOT STAMPED BLACK LETTERS ON YELLOW BACKGROUND ON SOLENOID WIRES. LETTERS TO CONFORM TO CONTROLLER/STATION NUMBER.
- 5. TREE BUBBLERS SHALL HAVE RISER ASSEMBLIES AS DETAILED.
- 6. INSTALL CHECK VALVES AS NEEDED TO ENSURE NO LOW HEAD DRAINAGE.
- 7. ALL VALVE CONTROL WIRE SHALL BE MINIMUM AWG NO. 14 COPPER UL APPROVED FOR DIRECT BURIAL IN GROUND. CONNECT WIRES WITH 3M DBY CONNECTIONS PER MANUFACTURER SPECIFICATIONS. RUN ONE (1) EXTRA CONTROL WIRE OF A DIFFERENT COLOR THROUGH ALL VALVE LOCATIONS FROM CONTROLLER. ALL WIRE AT VALVES SHALL HAVE 24" COILED LOOP IN VALVES BOXES. TAPE WIRES IN BUNDLES EVERY TEN FEET IN PLANTING AREAS.
- 8. PIPE AND WIRING UNDER PAVEMENT SHALL BE INSTALLED AT A TWENTY FOUR INCH (24") DEPTH BELOW GRADE. PIPE AND WIRING UNDER PAVEMENT SHALL BE INSTALLED IN PVC SCHEDULE 40 SLEEVING AND ELECTRICAL CONDUIT. SLEEVING AND ELECTRICAL CONDUIT SHALL EXTEND TWELVE INCHES (12") BEYOND EDGE OF PAVEMENT OR CURB. SURROUND PIPE WITH SAND IN AREAS WHERE ROCKY TERRAIN IS ENCOUNTERED.
- 9. AT JOB COMPLETION SUPPLY CITY WITH TWO (2) SETS OF KEYS FOR CONTROLLER.
- 10. REVIEW DRIP COMPONENTS, EQUIPMENT AND INSTALLATION TECHNIQUES WITH MANUFACTURER'S REPRESENTATIVE. SPECIAL ATTENTION SHALL BE PAID WHEN COORDINATING INSTALLATION OF PLANT MATERIALS AND DRIP SYSTEM. AVOID CONFLICTS BETWEEN INSTALLATION OF DRIP TUBING AND PLANT LOCATIONS. IF CONFLICTS IN INSTALLATION LOCATIONS OCCUR, THEN PLANT INSTALLATION LOCATIONS SHALL HAVE PRIORITY. LAYOUT SHOWN IS DIAGRAMMATIC ONLY. FOLLOW SPACING REQUIREMENTS INDICATED ON INSTALLATION DETAIL AND MANUFACTURERS SPECIFICATIONS.
- 11.PROVIDE LITERATURE OF DRIP SYSTEM COMPONENTS INCLUDING ANY PREVENTATIVE MAINTENANCE AND TROUBLE SHOOTING GUIDES TO CITY AND REVIEW MAINTENANCE PROCEDURES INCLUDING:

CLEANING FILTER IN WYE STRAINERS
REPAIRING BREAKS IN PIPES AND RISERS
ADDING EMITTERS OR TUBING FOR EXPANSION/INSTALLING PLUGS

ETWU (Estimated Total Water Use)

Valve #	Plant	Plant	Irrigation	Irrigation	ETAF	Area (ff²)	ETAF x	<b>ETWU</b> (Eto) (0.62) (ETAF) (Area)
	Туре	Factor		Efficiency	(PF/IE)		/ 11 C G	2 10 12 12
Α	Med	0.5	Tree Bubbler	0.81	0.62	525	324	10,066
В	Low	0.2	In-line Drip	0.81	0.25	775	191	5,944
					0.40	1,300	515	16,010

MAWA (Maximum Applied Water Allowance)

Eto	0.62	ETAF	Area	MAWA
			(ft²)	(Eto) (0.62) (ETAF) (Area
50.1	0.62	0.45	1,300	18,17

The ETWU (16,010) is less than the MAWA (18,171), therefore this design complies with the California Code of Regulations Title 23, Waters - Model Water Efficient Landscape Ordinance.

GRASS VALLE





PROJECT INFO

NAME: <u>MILL STREET PROJECT</u>
CLIENT: <u>CITY OF GRASS VALLEY</u>
PROJECT NUMBER: <u>0069</u>

SUBMITTAL DESCRIPTION

CONCEPTUAL PLANS

ISSUANCE AND REVISIONS

STAMP

 DATE:
 11.17.2

 SCALE:
 AS SHOW!

 DRAWN BY:
 BCC

SHEET NAME:

CHECKED BY:

IRRIGATION
NOTES AND
LEGEND
SHEET NUMBER:

© COPYRIGHT 2021 ATLAS LAB INC.

SUBMITTAL DESCRIPTION

**ISSUANCE AND REVISIONS** 

11.17.21 DATE: \_ AS SHOWN SCALE: DRAWN BY: CHECKED BY: \_

IRRIGATION

SHEET NUMBER:

© COPYRIGHT 2021 ATLAS LAB INC.

CLIENT: <u>CITY OF GRASS VALLEY</u>

SHEET NAME: **PLANTING** PLAN


SHEET NUMBER:


L3.1

© COPYRIGHT 2021 ATLAS LAB INC.


CAL PLANTING - MODUAR RAISED PLANTER TYPE A	1	TYPICAL F
P-CO-MIL-43		1/4" = 1'-0"

2) TYPICA 3/4" = 1'-0"

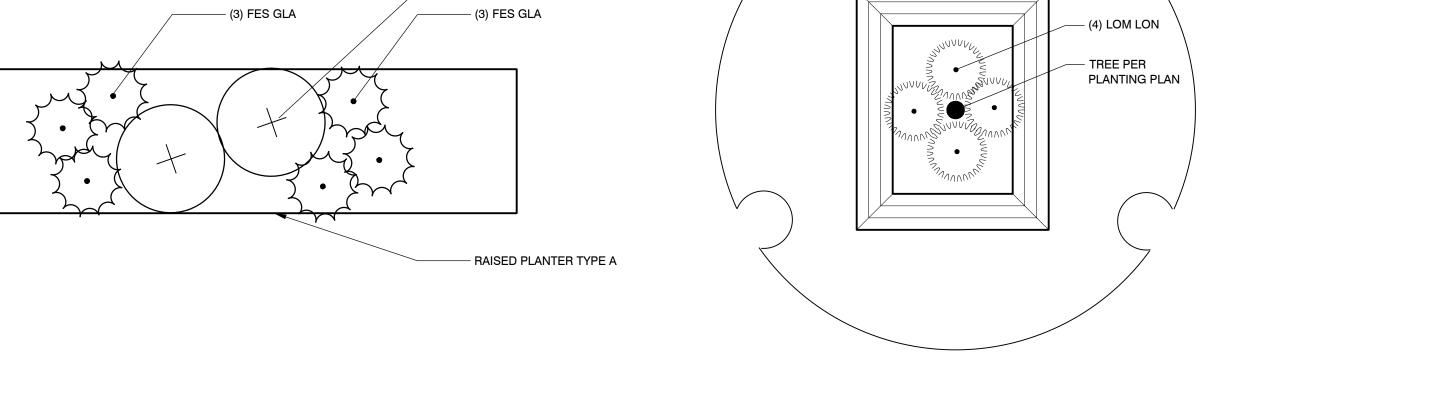

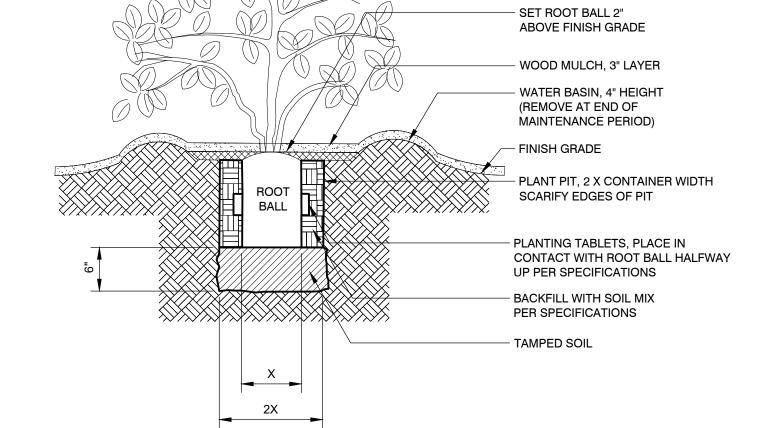



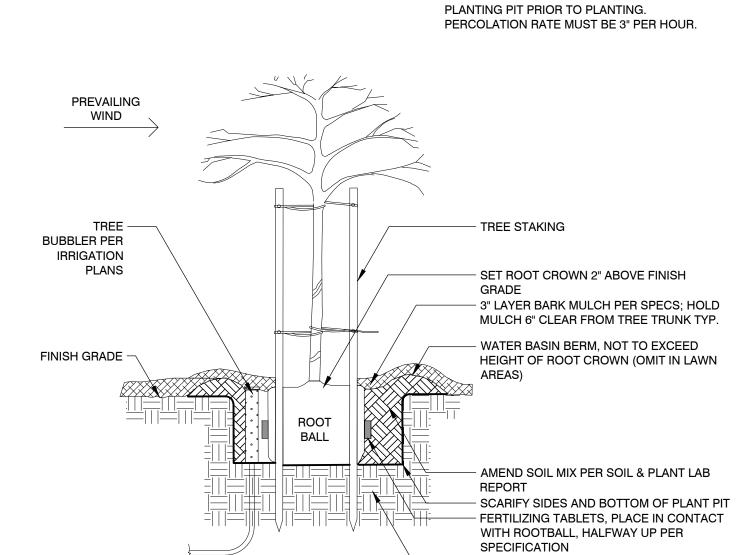

— EDGE OF PAVING, WALL, VALLEY OTHER ARCHITECTURAL FEATURE.

P-CO-MIL-09

P-CO-MIL-07

RAISED PLANTER WITH

**BUILT-IN SEATING** 

- EXISTING SIDEWALK

BAND PER PLANS

1. CONTRACTOR TO VERIFY PERCOLATION OF


TRIANGULAR SPACING

A. S= PLANT SPACING DISTANCE ON CENTER, SEE CHART

PLANT SPACING

B. FOR USE AS A GUIDE FOR SHRUBS AND GROUNDCOVER WHEN PLANTS ARE SPACED EQUIDISTANT FROM EACH OTHER.

- UNDISTURBED NATIVE SOIL

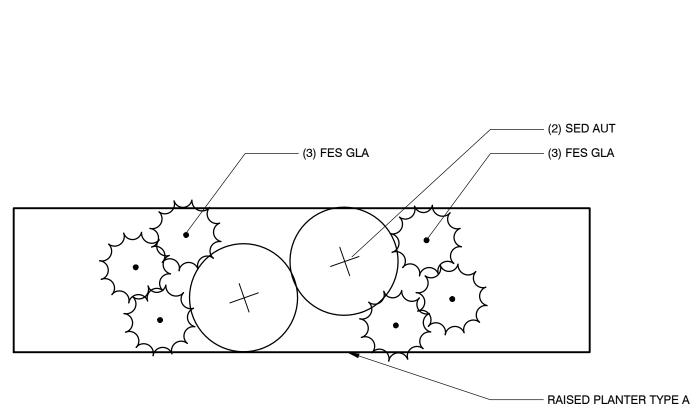

PLANTING - RAISED PLANTER WITH BUILT-IN SEATING P-CO-MIL-44

STEWART ST. S. AUBURN (3) ACE UBS —

NECESSITATE TRIMMING AND IN SOME CASE REMOVAL OF TREES AND SHRUBS AS AN ON-GOING MAINTENANCE PROCEDURE. SOILS DRY WEIGHT, AND A MINIMUM OF 2" OF QUALITY RECYCLED COMPOST, ON ALL PLANTING AREAS.

(3) ACE UBS -

CHURCH ST.

PLANT SCHEDULE CODE BOTANICAL / COMMON NAME CONT SPACING WATER USE ACE JOG Acer japonicum 'Bloodgood' / Bloodgood Maple 24" box Per plan Med ACE UBS Acer truncatum x platanoides 'JFS-KW187' TM / Urban Sunset Maple 24" box Per plan Med COR RBR Cornus florida 'Rubra' / Red Flowering Dogwood NYS ELD Nyssa sylvatica 'JFS-red' TM / Firestarter Tupelo PAR VAN Parrotia persica 'Vanessa' / Vanessa Persian Parrotia

11 Medium - High 5 Low - Medium BOTANICAL / COMMON NAME ARC MAS Arctostaphylos uva-ursi 'Massachusetts' / Massachusetts Kinnikinnick FES GLA Festuca glauca 'Elijah Blue' / Elijah Blue Fescue 1 gal. 12" O.C. Low 168 Low Laurus nobilis 'Little Ragu' / Little Ragu Sweet Bay Low - Medium

QTY WATER USE

5 Medium - High

2 Medium

LOM LON Lomandra longifolia 'Breeze' TM / Breeze Mat Rush 126 Low - Medium 12 Low - Medium PIN MOP Pinus mugo 'Mops' / Mops Mugo Pine

SED AUT Sedum x 'Autumn Joy' / Autumn Joy Sedum Low - Medium Teucrium chamaedrys / Germander

SYMBOL DESCRIPTION TYPICAL PLANTING - RAISED PLANTER WITH BUILT-IN SEATING 1/L3.1

TYPICAL PLANTING - MODULAR RAISED PLANTER TYPE A

### PLANTING NOTES

- 1. ALL WORK SHALL BE PERFORMED BY PERSONS FAMILIAR WITH PLANTING WORK AND UNDER THE SUPERVISION OF A QUALIFIED PLANTING FOREMAN.
- 2. ALL QUANTITIES AND PLANT COUNTS ARE CONCEPTUAL FOR DESIGN BUILD CONTRACTOR PROCUREMENT.
- 3. PLANT MATERIAL LOCATIONS SHOWN ARE DIAGRAMMATIC AND MAY BE SUBJECT TO CHANGE IN THE FIELD. PLANT LOCATIONS ARE TO BE ADJUSTED IN THE FIELD AS NECESSARY TO SCREEN UTILITIES, BUT SHALL NOT BLOCK WINDOWS, BLOCK SIGNS NOR IMPEDE ACCESS.
- 4. THE DESIGN INTENT OF THE PLANTING PLAN IS TO ESTABLISH AN ATTRACTIVE MATURE LANDSCAPE APPEARANCE. FUTURE PLANT GROWTH WILL
- 5. ALL PLANTING AREA MUST BE IRRIGATED WITH AUTOMATIC IRRIGATION SYSTEM. IRRIGATION SYSTEM SHALL BE FULLY AUTOMATED AND OPERATIONAL WITH FULL COVERAGE PRIOR TO PLANTING.
- 6. CONTRACTOR TO REVIEW ALL EXISTING, PROPOSED, & AS BUILT UTILITY PLANS PRIOR TO CONSTRUCTION. CONTRACTOR TO TAKE PRECAUTIONS IN EXCAVATION OF ALL TREE PLANTING PITS.
- 7. CONTRACTOR MUST REVIEW ALL PLANS PRIOR TO THE BEGINNING OF CONSTRUCTION AND MAINTAIN THE FOLLOWING CLEARANCES FOR ALL TREE PLANTINGS. CONTRACTOR TO TAKE PRECAUTION IN ALL EXCAVATION ACTIVITY. NOTIFY LANDSCAPE ARCHITECT OF ANY CONFLICTS PRIOR TO

FIRE HYDRANTS AND PIVS: 3' MINIMUM

LIGHT POLES: 10' MINIMUM UTILITIES: 3' MINIMUM

8. PROCUREMENT OF PLANT MATERIAL SHALL NOT BE LIMITED TO NORTHERN CALIFORNIA. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL TRUCKING, INSPECTIONS, AND INCIDENTALS FOR PROVIDING PLANT MATERIAL FROM SOURCES OUT OF STATE AS REQUIRED BY THE PROJECT PLANTING PLAN.

- 1. ALL SOILS IMPORTED ONTO THE SITE FOR ANY PURPOSE SUCH AS GRADING, NON EXPANSIVE FILL, FILL, OR FOR ANY GENERAL PURPOSE MUST BE
- SUITABLE FOR PLANTING PRIOR TO PLACEMENT. ALL IMPORT SOILS SHALL BE NON-DETRIMENTAL TO PLANT MATERIAL. 2. SOIL IS TO BE AMENDED, AT THE RATE INDICATED BY THE SOIL ANALYSIS, TO BRING THE SOIL ORGANIC MATTER CONTENT TO A MINIMUM OF 3.5% BY
- 3. ALL PLANTERS IN AREAS WHICH HAVE BEEN COMPACTED, SUCH AS ADJACENT TO BUILDINGS AND IN PARKING LOTS, SHALL BE CROSS RIPPED TO THE FOLLOWING DEPTHS: PLANTERS LESS THAN THREE FEET WIDE SHALL HAVE COMPACTION RELIEVED TO A MINIMUM DEPTH OF TWENTY-FOUR (24) INCHES BELOW SUBGRADE. PLANTERS THREE TO TEN (3-10) FEET WIDE MUST HAVE COMPACTION RELIEVED TO A MINIMUM DEPTH OF 18" BELOW SUBGRADE, PLANTERS MORE THAN 10' WIDE SHALL HAVE COMPACTION RELIEVED TO A MINIMUM DEPTH OF 12" BELOW SUBGRADE. AREAS SHALL BE PROTECTED AFTER DECOMPACTION.
- 4. SOIL FOR PLANTERS SHALL BE PER SPECIFICATIONS. SHOULD FUTURE MAINTENANCE REQUIRE REPLENISHING SOIL, IT SHALL BE PER THE MIX OUTLINED IN THE PLANTING SPECIFICATIONS.

### SUBMITTALS

1. CONTRACTOR MUST SUBMIT ALL TESTS, PRODUCTS, ACCESSORIES, CUT SHEETS OF ALL ITEMS SPECIFIED FOR REVIEW AND APPROVAL PRIOR TO INSTALLATION.

MUNICIPAL REQUIREMENTS

1. ALL OFF-SITE PLANT MATERIAL TO BE INSPECTED & APPROVED BY CITY REPRESENTATIVE AND LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.

PROJECT INFO

PROJECT NUMBER: 0069 SUBMITTAL DESCRIPTION

**ISSUANCE AND REVISIONS** 

11.17.21 AS SHOWN SCALE: \_ DRAWN BY: CHECKED BY: \_\_\_\_

SHEET NAME: PLANTING PLAN

SHEET NUMBER:

L3.2


© COPYRIGHT 2021 ATLAS LAB INC.

### **EXHIBIT 2**PROJECT RENDERINGS



DATE: 11/30/2021


SHEET:

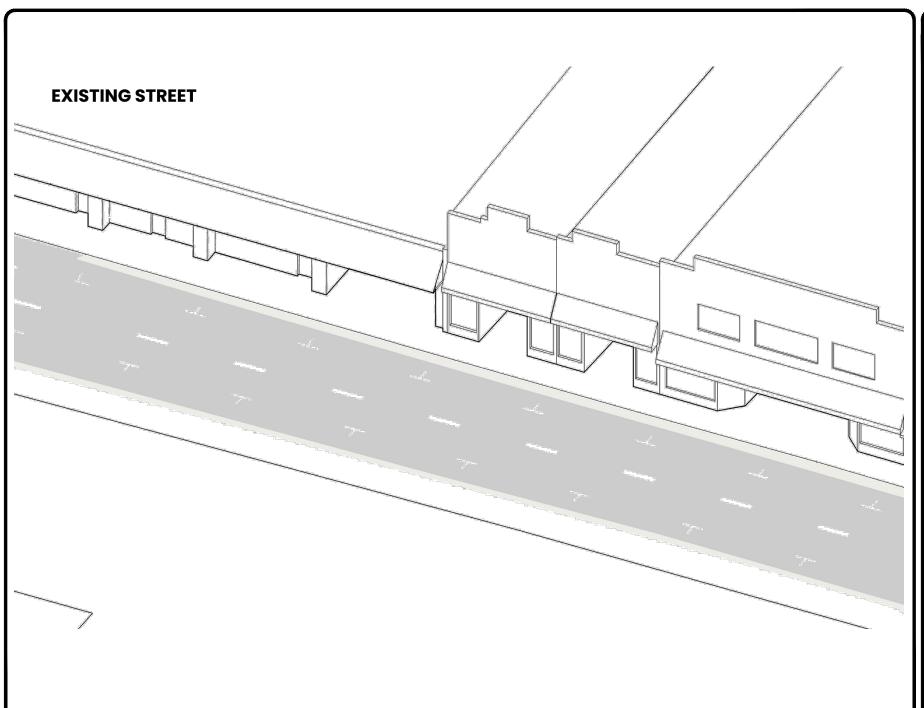




DATE: 11/30/2021

SHEET: 2 OF 19

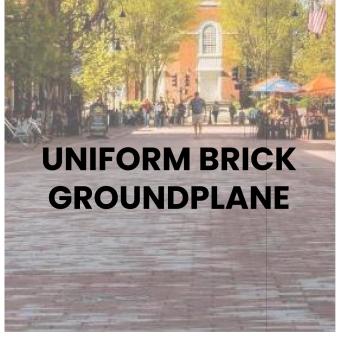

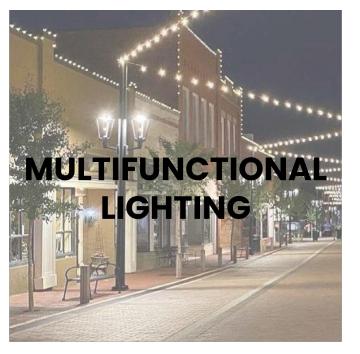








> DATE: 11/30/2021

> > SHEET: 3 OF 19

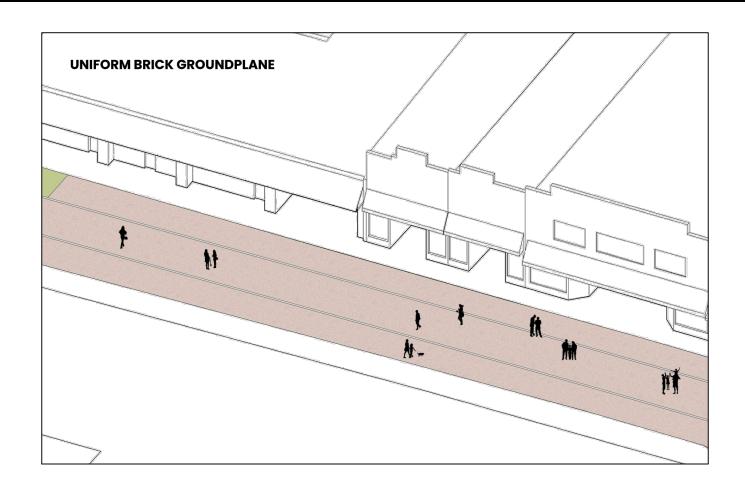

### **PAVING OPTIONS**



Pine Hall Brick Stormpaver permeable brick paver

### **BRICK PAVERS**

- True fired-clay brick with authentic full-depth color
- 2.75" depth rated for Heavy Vehicular Traffic (ASTM C1272) and AASHTO H-20/HS20 loading



DATE: 11/30/2021


SHEET: 4 OF 19





DATE: 11/30/2021

SHEET: 6 OF 19

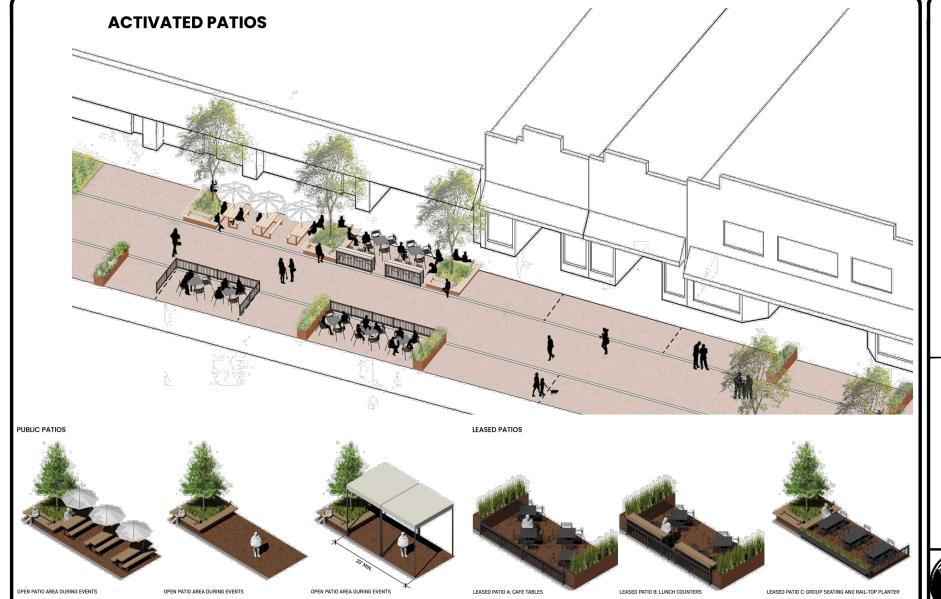



DATE: 11/30/2021

SHEET: 5 OF 19





DATE: 11/30/2021

SHEET:





DATE: 11/30/2021

SHEET: 8 OF 19





DATE: 11/30/2021

SHEET: 9 OF 19





DATE: 11/30/2021

SHEET: 10 OF 19





ANP Lighting LA 142







### CITY OF GRASS VALLEY ENGINEERING DIVISION


### D H

### DRAWN BY:

DATE: 11/30/2021

SHEET: 11 OF 19

### **MULTIFUNCTIONAL LIGHTING**

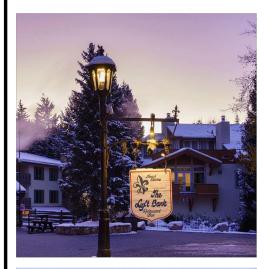







Historic pole with optional accessories and embedded GFCI receptacles



ANP Lighting - technology + utility integration capabilities



DATE: 11/30/2021

SHEET: 12 OF 19





DATE: 11/30/2021

SHEET: 13 OF 19





DATE: 11/30/2021

SHEET:





DATE: 11/30/2021

> SHEET: 15 OF 19



CITY OF GRASS VALLEY ENGINEERING DIVISION



DRAWN BY: EMA

> DATE: 11/30/2021

SHEET: 16 OF 19

CITY OF GRASS VALLEY ENGINEERING DIVISION



DRAWN BY: EMA

> DATE: 11/30/2021

SHEET: 17 OF 19

CITY OF GRASS VALLEY ENGINEERING DIVISION



DRAWN BY: EMA

> DATE: 11/30/2021

SHEET: 18 OF 19

CITY OF GRASS VALLEY ENGINEERING DIVISION



DRAWN BY: EMA

> DATE: 11/30/2021

SHEET: 19 OF 19

### EXHIBIT 3 PROJECT COMPONENTS

CITY OF GRASS VALLEY ENGINEERING DIVISION



DRAWN BY: EMA

DATE: 11/29/2021

SHEET: 1 OF 3



DRAWN BY: EMA

> DATE: 11/29/2021

SHEET: 2 OF 3



#### **LEGEND**

COMPONENT 1 (MILL STREET PORTION)

COMPONENT 2 (MAIN STREET PORTION)

COMPONENT 3 (WATER LINE REPLACEMENT)

COMPONENT A (MAIN/MILL ADDIDITVE BID ITEM)

# DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT

CITY OF GRASS VALLEY ENGINEERING DIVISION



DRAWN BY: EMA

DATE: 11/29/2021

SHEET: 3 OF 3

# EXHIBIT 4 FISCAL RECOVERY GRANT FUND TERMS AND CONDITIONS

#### U.S. DEPARTMENT OF THE TREASURY CORONAVIRUS LOCAL FISCAL RECOVERY FUND AWARD TERMS AND CONDITIONS

#### 1. Use of Funds.

- a. Recipient understands and agrees that the funds disbursed under this award may only be used in compliance with section 603(c) of the Social Security Act (the Act), Treasury's regulations implementing that section, and guidance issued by Treasury regarding the foregoing.
- b. Recipient will determine prior to engaging in any project using this assistance that it has the institutional, managerial, and financial capability to ensure proper planning, management, and completion of such project.
- 2. <u>Period of Performance</u>. The period of performance for this award begins on the date hereof and ends on December 31, 2026. As set forth in Treasury's implementing regulations, Recipient may use award funds to cover eligible costs incurred during the period that begins on March 3, 2021, and ends on December 31, 2024.
- 3. <u>Reporting</u>. Recipient agrees to comply with any reporting obligations established by Treasury as they relate to this award.

#### 4. Maintenance of and Access to Records

- a. Recipient shall maintain records and financial documents sufficient to evidence compliance with section 603(c) of the Act, Treasury's regulations implementing that section, and guidance issued by Treasury regarding the foregoing.
- b. The Treasury Office of Inspector General and the Government Accountability Office, or their authorized representatives, shall have the right of access to records (electronic and otherwise) of Recipient in order to conduct audits or other investigations.
- c. Records shall be maintained by Recipient for a period of five (5) years after all funds have been expended or returned to Treasury, whichever is later.
- 5. <u>Pre-award Costs.</u> Pre-award costs, as defined in 2 C.F.R. § 200.458, may not be paid with funding from this award.
- 6. <u>Administrative Costs.</u> Recipient may use funds provided under this award to cover both direct and indirect costs.
- 7. Cost Sharing. Cost sharing or matching funds are not required to be provided by Recipient.
- 8. <u>Conflicts of Interest</u>. Recipient understands and agrees it must maintain a conflict of interest policy consistent with 2 C.F.R. § 200.318(c) and that such conflict of interest policy is applicable to each activity funded under this award. Recipient and subrecipients must disclose in writing to Treasury or the pass-through entity, as appropriate, any potential conflict of interest affecting the awarded funds in accordance with 2 C.F.R. § 200.112.

- 9. Compliance with Applicable Law and Regulations.
  - a. Recipient agrees to comply with the requirements of section 603 of the Act, regulations adopted by Treasury pursuant to section 603(f) of the Act, and guidance issued by Treasury regarding the foregoing. Recipient also agrees to comply with all other applicable federal statutes, regulations, and executive orders, and Recipient shall provide for such compliance by other parties in any agreements it enters into with other parties relating to this award.
  - b. Federal regulations applicable to this award include, without limitation, the following:
    - Uniform Administrative Requirements, Cost Principles, and Audit Requirements for Federal Awards, 2 C.F.R. Part 200, other than such provisions as Treasury may determine are inapplicable to this Award and subject to such exceptions as may be otherwise provided by Treasury. Subpart F – Audit Requirements of the Uniform Guidance, implementing the Single Audit Act, shall apply to this award.
    - ii. Universal Identifier and System for Award Management (SAM), 2 C.F.R. Part 25, pursuant to which the award term set forth in Appendix A to 2 C.F.R. Part 25 is hereby incorporated by reference.
    - iii. Reporting Subaward and Executive Compensation Information, 2 C.F.R. Part 170, pursuant to which the award term set forth in Appendix A to 2 C.F.R. Part 170 is hereby incorporated by reference.
    - iv. OMB Guidelines to Agencies on Governmentwide Debarment and Suspension (Nonprocurement), 2 C.F.R. Part 180, including the requirement to include a term or condition in all lower tier covered transactions (contracts and subcontracts described in 2 C.F.R. Part 180, subpart B) that the award is subject to 2 C.F.R. Part 180 and Treasury's implementing regulation at 31 C.F.R. Part 19.
    - v. Recipient Integrity and Performance Matters, pursuant to which the award term set forth in 2 C.F.R. Part 200, Appendix XII to Part 200 is hereby incorporated by reference.
    - vi. Governmentwide Requirements for Drug-Free Workplace, 31 C.F.R. Part 20.
    - vii. New Restrictions on Lobbying, 31 C.F.R. Part 21.
    - viii. Uniform Relocation Assistance and Real Property Acquisitions Act of 1970 (42 U.S.C. §§ 4601-4655) and implementing regulations.
    - ix. Generally applicable federal environmental laws and regulations.
  - c. Statutes and regulations prohibiting discrimination applicable to this award include, without limitation, the following:
    - i. Title VI of the Civil Rights Act of 1964 (42 U.S.C. §§ 2000d et seq.) and Treasury's implementing regulations at 31 C.F.R. Part 22, which prohibit discrimination on the basis of race, color, or national origin under programs or activities receiving federal financial assistance;

- ii. The Fair Housing Act, Title VIII of the Civil Rights Act of 1968 (42 U.S.C. §§ 3601 et seq.), which prohibits discrimination in housing on the basis of race, color, religion, national origin, sex, familial status, or disability;
- iii. Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. § 794), which prohibits discrimination on the basis of disability under any program or activity receiving federal financial assistance;
- iv. The Age Discrimination Act of 1975, as amended (42 U.S.C. §§ 6101 et seq.), and Treasury's implementing regulations at 31 C.F.R. Part 23, which prohibit discrimination on the basis of age in programs or activities receiving federal financial assistance; and
- v. Title II of the Americans with Disabilities Act of 1990, as amended (42 U.S.C. §§ 12101 et seq.), which prohibits discrimination on the basis of disability under programs, activities, and services provided or made available by state and local governments or instrumentalities or agencies thereto.
- 10. Remedial Actions. In the event of Recipient's noncompliance with section 603 of the Act, other applicable laws, Treasury's implementing regulations, guidance, or any reporting or other program requirements, Treasury may impose additional conditions on the receipt of a subsequent tranche of future award funds, if any, or take other available remedies as set forth in 2 C.F.R. § 200.339. In the case of a violation of section 603(c) of the Act regarding the use of funds, previous payments shall be subject to recoupment as provided in section 603(e) of the Act.
- 11. <u>Hatch Act.</u> Recipient agrees to comply, as applicable, with requirements of the Hatch Act (5 U.S.C. §§ 1501-1508 and 7324-7328), which limit certain political activities of State or local government employees whose principal employment is in connection with an activity financed in whole or in part by this federal assistance.
- 12. <u>False Statements</u>. Recipient understands that making false statements or claims in connection with this award is a violation of federal law and may result in criminal, civil, or administrative sanctions, including fines, imprisonment, civil damages and penalties, debarment from participating in federal awards or contracts, and/or any other remedy available by law.
- 13. <u>Publications</u>. Any publications produced with funds from this award must display the following language: "This project [is being] [was] supported, in whole or in part, by federal award number [enter project FAIN] awarded to [name of Recipient] by the U.S. Department of the Treasury."

#### 14. Debts Owed the Federal Government.

- a. Any funds paid to Recipient (1) in excess of the amount to which Recipient is finally determined to be authorized to retain under the terms of this award; (2) that are determined by the Treasury Office of Inspector General to have been misused; or (3) that are determined by Treasury to be subject to a repayment obligation pursuant to section 603(e) of the Act and have not been repaid by Recipient shall constitute a debt to the federal government.
- b. Any debts determined to be owed the federal government must be paid promptly by

Recipient. A debt is delinquent if it has not been paid by the date specified in Treasury's initial written demand for payment, unless other satisfactory arrangements have been made or if the Recipient knowingly or improperly retains funds that are a debt as defined in paragraph 14(a). Treasury will take any actions available to it to collect such a debt.

#### 15. Disclaimer.

- a. The United States expressly disclaims any and all responsibility or liability to Recipient or third persons for the actions of Recipient or third persons resulting in death, bodily injury, property damages, or any other losses resulting in any way from the performance of this award or any other losses resulting in any way from the performance of this award or any contract, or subcontract under this award.
- b. The acceptance of this award by Recipient does not in any way establish an agency relationship between the United States and Recipient.

#### 16. <u>Protections for Whistleblowers</u>.

- a. In accordance with 41 U.S.C. § 4712, Recipient may not discharge, demote, or otherwise discriminate against an employee in reprisal for disclosing to any of the list of persons or entities provided below, information that the employee reasonably believes is evidence of gross mismanagement of a federal contract or grant, a gross waste of federal funds, an abuse of authority relating to a federal contract or grant, a substantial and specific danger to public health or safety, or a violation of law, rule, or regulation related to a federal contract (including the competition for or negotiation of a contract) or grant.
- b. The list of persons and entities referenced in the paragraph above includes the following:
  - i. A member of Congress or a representative of a committee of Congress;
  - ii. An Inspector General:
  - iii. The Government Accountability Office;
  - iv. A Treasury employee responsible for contract or grant oversight or management;
  - v. An authorized official of the Department of Justice or other law enforcement agency;
  - vi. A court or grand jury; or
  - vii. A management official or other employee of Recipient, contractor, or subcontractor who has the responsibility to investigate, discover, or address misconduct.
- c. Recipient shall inform its employees in writing of the rights and remedies provided under this section, in the predominant native language of the workforce.
- 17. <u>Increasing Seat Belt Use in the United States</u>. Pursuant to Executive Order 13043, 62 FR 19217 (Apr. 18, 1997), Recipient should encourage its contractors to adopt and enforce on-the-job seat belt policies and programs for their employees when operating company-owned, rented or personally owned vehicles.
- 18. Reducing Text Messaging While Driving. Pursuant to Executive Order 13513, 74 FR 51225 (Oct. 6, 2009), Recipient should encourage its employees, subrecipients, and contractors to adopt and enforce policies that ban text messaging while driving, and Recipient should establish workplace safety policies to decrease accidents caused by distracted drivers.

# EXHIBIT 5 DESIGN-BUILD CONTRACT

CONT	RACT	NO.	

### CITY OF GRASS VALLEY PUBLIC WORKS DEPARTMENT ENGINEERING DIVISION

#### **DESIGN-BUILD CONTRACT**

THIS CONTRACT is made on the date set forth below, by and between the CITY OF GRASS VALLEY, a municipal corporation within the State of California (hereinafter "CITY"), and \_\_\_\_\_\_\_\_, a type in business form and state of license i.e. California Corporation, (hereinafter "CONTRACTOR"). The CITY and CONTRACTOR for the consideration hereinafter mentioned agree as follows:

#### **ARTICLE 1: SCOPE OF WORK**

- 1.1. CONTRACTOR agrees to furnish all work, labor, tools, materials, transportation, equipment, services, and other means of construction necessary to perform and complete in a good and workmanlike manner, those certain improvements as called for, and in the manner designated in, and in strict conformity with Contract No. \_\_\_\_\_\_ entitled: DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT NO. 21-12 hereafter "PROJECT", in compliance with the Contract Documents as described in Article 3.
- 1.2. CONTRACTOR understands and agrees that the work, labor, tools, materials, transportation, equipment, incidentals, services and other means of construction for the Project shall be furnished and the work performed as required in the Contract Documents under the sole direction and control of CONTRACTOR, and subject to the inspection and approval of the CITY, or its representatives.

#### **ARTICLE 2: CONTRACT PRICE**

#### **ARTICLE 3: CONTRACT DOCUMENTS**

- 3.1. The complete Contract consists of the following documents, to wit:
  - Project Plans for this Project developed in accordance with the Proposal
  - Special Provisions developed in accordance with the Proposal
  - City of Grass Valley Improvement Standards (latest edition)
  - Caltrans Standard Specifications, (latest edition)
  - Caltrans Standard Plans, (latest edition)
  - Equipment Rental Rates and General Prevailing Wage Rates of the State of California, Department of Transportation, and where applicable, Federal wage rates and Section 14 Federal Fund S enclosures
  - Executed Performance Bond
  - Executed Labor and Materials Bond
  - Certification Labor Code Section 1861
  - List of Subcontractors
- 3.2. Any and all obligations of the CITY and the CONTRACTOR are fully set forth and described in the above documents. All of the above documents are intended to cooperate so that any work called for in one and not mentioned in the other or vice versa is to be executed the same as if mentioned in all said documents. The documents comprising the complete Contract are sometimes collectively referred to as the Contract Documents.

#### **ARTICLE 4: TIME FOR PERFORMANCE - LIQUIDATED DAMAGES**

- 4.1. The Commencement date of the Contract for determination of the time for completion shall be the date CONTRACTOR is directed to proceed by the City Engineer, as stated in the Notice to Proceed. The CONTRACTOR shall complete all work required by the Contract within **120 working days** after said commencement date, as adjusted and provided for in the Contract Documents.
- 4.2. In the event CONTRACTOR does not complete all work required by the Contract within the time specified above, liquidated damages shall be imposed upon the CONTRACTOR. CONTRACTOR agrees that if all the work called for under this Contract in all parts and requirements is not completed within the performance time period set forth above, damage will be sustained by CITY. As it is and will be impracticable to ascertain and determine the actual damage the CITY will sustain, CONTRACTOR agrees to pay to CITY five hundred dollars (\$500.00) per calendar day for each and every day(s) delay in finishing the work in excess of the working days described. Time is of the essence in this contract. CONTRACTOR further agrees that CITY may deduct the amount of these damages from any moneys due or that may become due the CONTRACTOR under this Contract. To the extent appropriate, as determined by CITY in its sole discretion, CITY shall administer this Article in accordance with the California Department of Transportation Standard Specifications Section 8-1.10 Liquidated Damages, (latest edition)

#### **ARTICLE 5: INDEMNITY & HOLD HARMLESS**

- 5.1. The CITY and/or the Grass Valley School District, and all officers, agents, employees, outside parties hired to inspect and/or design the work, and volunteers thereof connected with the work, including but not limited to, the City Engineer and the Engineer, shall not be answerable or accountable in any manner for the loss or damage to any of the materials or other things used or employed in performing the work; for injury to or death of any person, either worker or the public; or damage to property from any cause which may have been prevented by CONTRACTOR or his or her workers or anyone employed by him/her.
- 5.2. CONTRACTOR shall be responsible for any liability imposed by law and for injuries to or death of any person including, but not limited to, workers and the public, or damage to property resulting from defects or obstructions or from any cause whatsoever during the progress of the work or at any time prior to its acceptance.
- 5.3. The CONTRACTOR shall indemnify and save harmless the CITY and/or the Grass Valley School District, and its officials, officers, agents, employees, or consultants and volunteers thereof connected with the work, including but not limited to, the City Engineer and the Engineer, from all claims, suits, or actions of every name, kind, and description, whether actual or alleged, brought forth on or on account of injuries to or death of any person, including but not limited to, workers or the public or damage to property resulting from the performance of the contract except where caused by the sole and active negligence or willful misconduct of the City, its officials, officers, agents, employees, consultants and volunteers. The duty of CONTRACTOR to indemnify and save harmless include the duties to defend as set forth in Civil Code Section 2778.
- 5.4. With respect to third party claims against the CONTRACTOR, the CONTRACTOR waives any and all rights to any type of express or implied indemnity against the CITY, its officials, officers, employees, agents, consultants, or volunteers.
- 5.5. It is the intent of the parties that the CONTRACTOR will indemnify and hold harmless the CITY and/or the Grass Valley School District, its officers, employees, agents and volunteers, from any and all claims, suits, or actions as set forth above, regardless of the existence or degree of fault or negligence on the part of the CITY, the CONTRACTOR, the subcontractors or employees of any of these, other than the sole or gross negligence of the CITY, its officials, officers, employees, agents, consultants, or volunteers.

#### **ARTICLE 6: INSURANCE**

6.1. Throughout the period of this agreement, the CONTRACTOR shall provide the following minimum

insurance coverage as listed below. CONTRACTOR shall file with CITY certificate(s) of Insurance and endorsements, in a form acceptable to CITY, and consistent with this agreement at the time of execution of this agreement. The insurance company must be acceptable to CITY, with a Best's Rating of no less than A:VII. Documentation of such rating acceptable to the CITY shall be provided at the same time Insurance Certificates are submitted. The Current evidence of coverage provided to the City shall be for the entire required period of insurance, including the one (1) year warranty period.

- 6.1.1 Any deductibles must be declared to, and approved by, the City.
- 6.2. In the event any of the required policies are canceled prior to the completion of the project and the CONTRACTOR does not furnish a new certificate(s) of insurance prior to cancellation, the CITY may obtain the required insurance and deduct the premium(s) from Contract monies due the CONTRACTOR.
- 6.3. Worker's Compensation and Employers Liability Insurance:
  - 6.3.a. The CONTRACTOR shall maintain adequate Workers' Compensation Insurance under the Laws of the State of California. CONTRACTOR shall fully comply with the provisions of Section 3700 of the Labor Code, which requires every employer to be insured against liability for Workers' Compensation or to undertake self insurance in accordance with the provisions of that Code, before commencing the performance of the work.
  - 6.3.b. By CONTRACTOR'S signature hereunder, CONTRACTOR certifies that he/she is aware of the provisions of Section 3700 of the California Labor Code which require every employer to be insured against liability for workers' compensation or to undertake self-insurance in accordance with the provisions of that Code, and he/she will comply with such provisions before commencing the performance of this Contract.
  - 6.3.c. If such insurance is underwritten by any agency other than State Compensation Fund, such agency shall be a company authorized to do business in the State of California.
  - 6.3.d. CONTRACTOR shall require all subcontractors to maintain adequate Workers' Compensation Insurance. Certificates of such Workers' Compensation shall be filed forthwith with the CITY upon demand.
  - 6.3.e. Worker's Compensation Insurance shall be provided as required by any applicable law or regulation. Employer's liability insurance shall be provided in amounts not less than the following:
    - One Million dollars (\$1,000,000) each accident for bodily injury by accident
    - One Million dollars (\$1,000,000) policy limit for bodily injury by disease
    - One Million dollars (\$1,000,000) each employee for bodily injury by disease
  - 6.3.f. If there is an exposure of injury to CONTRACTOR'S employees under the U.S. Longshoremen's and Harbor Worker's Compensation Act, the Jones Act, or under laws, regulations, or statutes applicable to maritime employees, coverage shall be included for such injuries or claims.
  - 6.3.g. Each Worker's Compensation policy shall be endorsed with the following specific language:

**Cancellation Notice:** "This policy shall not be canceled or materially changed without first giving thirty (30) days prior written notice to the City of Grass Valley."

**Waiver of Subrogation:** "The Insurance Company agrees to waive all rights of subrogation against the Entity, its elected or appointed officials, agents, employees and volunteers for losses paid under the terms of this policy which arise from the work performed by the Named Insured for the Entity.

#### 6.4. **GENERAL LIABILITY INSURANCE:**

- 6.4.a. Commercial General Liability insurance no less broad than ISO form CG 00 01, covering all operations by or on behalf of CONTRACTOR, providing insurance for bodily injury liability and property damage liability for the limits of liability indicated below and including coverage for: premises, operations; products and completed operations; contractual liability insuring the obligations assumed by CONTRACTOR in this Agreement; broad form property damage (including completed operations); explosion, collapse, and underground hazards; personal injury liability.
- 6.4.b. Except with respect to bodily injury and property damage included within the products and completed operations hazards, the aggregate limits, where applicable, shall apply separately to CONTRACTOR'S work under the Contract. One of the following forms is required: Commercial General Liability (Occurrence); or Commercial General Liability (Claims Made).
- 6.4.c. If CONTRACTOR carries a Commercial General Liability (Occurrence) policy:
  - 1. The limits of liability shall not be less than:
    - One Million dollars (\$1,000,000) each occurrence (combined single limit for bodily injury and property damage)
    - ➤ One Million dollars (\$1,000,000) for Personal Injury Liability
    - ➤ Two Million dollars (\$2,000,000) for Products-Completed Operations
    - > Two Million dollars (\$2,000,000) General Aggregate
  - 2. If the policy does not have an endorsement providing that the General Aggregate Limit applies separately, or if defense costs are included in the aggregate limits, then the required aggregate limits shall be Two Million dollars (\$2,000,000).
  - 3. If CONTRACTOR maintains higher limits than the specified minimum limits above, the City shall be entitled to coverage for the higher limits maintained by CONTRACTOR.
- 6.4.d. Special Claims Made Policy Form Provisions:

CONTRACTOR shall not provide a Commercial General Liability (Claims Made) policy without the express prior written consent of CITY, which consent, if given, shall be subject to the following conditions:

- 1. The limits of liability shall not be less than:
  - ➤ One Million dollars (\$1,000,000) each Occurrence (combined single limit for bodily injury and property damage)
  - One Million dollars (\$1,000,000) for Personal Injury Liability
  - Two Million dollars (\$2,000,000) Aggregate for Products Completed Operations
  - > Two Million dollars (\$2,000,000) General Aggregate
- 2. The insurance coverage provided by CONTRACTOR shall contain language providing coverage up to one (1) year following the completion of the Contract in order to provide insurance coverage for the hold harmless provisions herein if the policy is a Claims Made Policy.

#### 6.5. **CONFORMITY OF COVERAGES:**

6.5.a. If more than one policy is used to meet the required coverages, such as a separate umbrella policy, such policies shall be consistent with all other applicable policies used to meet these

minimum requirements. For example, all policies shall be Occurrence Liability policies, or all shall be Claims Made Liability policies if approved by the CITY as noted above. In no case shall the types of coverages be different.

#### 6.6. ADDITIONAL REQUIREMENTS:

- 6.6.a. Premium Payments: The insurance companies shall have no recourse against the CITY, and funding agencies, its officers and employees or any of them for payment of any premiums or assessments under any policy issued by a mutual insurance company.
- 6.6.b. Policy Deductibles: The CONTRACTOR shall be responsible for all deductibles in all of CONTRACTOR'S insurance policies. The amount of deductibles for insurance coverage required herein should be reasonable and subject to CITY'S approval.
- 6.6.c. CONTRACTOR'S Obligations: CONTRACTOR'S indemnity and other obligations shall not be limited by the foregoing insurance requirements and shall survive the expiration of this agreement.
- 6.6.d. Material Breach: Failure of the CONTRACTOR to maintain the insurance required by this agreement, or to comply with any of the requirements of this section, shall constitute a material breach of the entire agreement.
- 6.6.e Duration of Coverage: City and/or the Grass Valley School District must be an additional insured for completed operations for a period of one (1) year after completion of the work.
- 6.6.f Project Reference: The Commercial General Certificate of Insurance must reference the project specifically by project title.

#### 6.7. **ENDORSEMENTS:**

6.7.a. Each Commercial General Liability policy shall be endorsed with the following specific language:

**Cancellation Notice:** "Contractor shall provide immediate written notice if (1) any of the required insurance policies is terminated; (2) the limits of any of the required polices are reduced; (3) or the deductible or self insured retention is increased. In the event of any cancellation or reduction in coverage or limits of any insurance, Contractor shall forthwith obtain and submit proof of substitute insurance. Should Contractor fail to immediately procure other insurance, as specified, to substitute for any canceled policy, the City may procure such insurance at Contractor's sole cost and expense.

**Waiver of Subrogation:** "The Insurance Company agrees to waive all rights of subrogation against the City of Grass Valley and/or the Grass Valley School District, its elected or appointed officials, agents, employees and volunteers for losses paid under the terms of this policy which arise from the work performed by the Named Insured for the City of Grass Valley.

"Provisions Regarding the Insured's Duties: Any failure to comply with reporting provisions of the policy or breaches or violations of warranties shall not affect coverage provided to the Entity, its elected or appointed officers, officials, employees or volunteers."

"Except as stated above, nothing herein shall be held to waive, alter or extend any of the limits, conditions, agreements or exclusions of the policy to which this endorsement is attached."

"The City and/or the Grass Valley School District, its officers, officials, employees, agents and volunteers shall be endorsed as an additional insured for liability arising out of ongoing and completed operations by or on behalf of the contractor. The City and/or the Grass Valley School District shall continue to be an additional insured for completed operations for (1) year after completion of the work.

The policy definition of "insured contract" shall include assumptions of liability arising out of both ongoing operations and the products-completed operations hazard ("f" definition of insured contract in ISO form CG 00 01, or equivalent).

The insurance provided to the additional insureds shall be primary to, and non-contributory with, any insurance or self-insurance program maintained by them.

The policy shall cover inter-insured suits and include a "Separation of Insureds" or "severability" clause which treats each insured separately.

The policy shall not contain a Contractors' Warranty or other similar language which eliminates or restricts insurance because of a subcontractor's failure to carry specific insurance or to supply evidence of such insurance.

#### 6.8. AUTOMOBILE LIABILITY INSURANCE:

- 6.8.a. CONTRACTOR shall provide Automobile Liability insurance covering bodily injury and property damage in an amount no less than One Million dollars (\$1,000,000) combined single limit for each occurrence.
- 6.8.b. Covered vehicles shall include owned, non-owned, and hired automobiles/trucks.
- 6.8 c. Endorsements: The City and/or the Grass Valley School District shall be named additional insured.
- 6.8 d. Required Evidence of Coverage: Properly completed Certificate of Insurance.

#### **ARTICLE 7: PRECEDENCE IN CONFLICTING DOCUMENTS**

7.1. It is further expressly agreed by and between the parties hereto that should there be any conflict between the terms of this instrument and the bid or proposal of said CONTRACTOR, then this instrument shall control and nothing herein shall be considered as acceptance of the said terms of said proposal conflicting herewith.

#### **ARTICLE 8: BOND REQUIREMENTS**

- 8.1. CONTRACTOR shall furnish both a Faithful Performance Bond and a Payment Bond (hereinafter collectively "Bonds") in the full amount of the Contract on the forms provided by the CITY. CITY shall retain the Performance Bond for a one-year guarantee period from the date of the CITY'S acceptance of the work.
- 8.2. The bonds shall be obtained from a California admitted surety that is licensed by the State of California to act as surety upon bonds and undertakings and which maintains in this State at least one office for the conduct of its business. The surety shall furnish reports as to its financial condition from time to time upon request by CITY.
- 8.3. In case of any conflict between the terms of the Contract and the terms of the Bonds, the terms of the Contract shall control and the Bonds shall be deemed to be amended thereby.
- 8.4. CONTRACTOR agrees to obtain the consent of the surety, if required, to any change, extension of time, alteration, or addition to any of the terms of the Contract Documents.

#### **ARTICLE 9: COMPLIANCE WITH LAWS**

9.1. CONTRACTOR is an independent contractor and shall, at its sole cost and expense comply with all laws, rules, ordinances and regulations of all governing bodies having jurisdiction over the work, obtain all necessary permits (unless specifically stated elsewhere in the Contract Documents to be obtained by CITY) and licenses therefore, pay all manufacturers' taxes, sales taxes, use taxes,

processing taxes, and all Federal and State taxes, insurance and contributions for social security and unemployment which are measured by wages, salaries or any remuneration paid to CONTRACTOR'S employees, whether levied under existing or subsequently enacted laws, rules or regulations. CONTRACTOR shall also pay all property tax assessments on materials or equipment used until acceptance by CITY. If any discrepancy or inconsistency is discovered in any of the Contract Documents in relation to any such law, rule, ordinance, regulation, order, or decree, the CONTRACTOR shall forthwith report the same to the CITY in writing.

- 9.2. Without limitation, materials furnished and performance by CONTRACTOR hereunder shall comply with Safety Orders of the Division of Industrial Safety, State of California, Federal Safety regulations of the Bureau of Labor, Department of Labor; and any other applicable state or federal regulations.
- 9.3. CONTRACTOR, upon request, shall furnish evidence satisfactory to CITY that any or all of the foregoing obligations have been or are being fulfilled. CONTRACTOR warrants to CITY that it is licensed by all applicable governmental bodies to perform this Contract and will remain so licensed throughout the progress of the work, and that it has, or will have, throughout the progress of the work, the necessary experience, skill, and financial resources to enable it to perform this Contract.
- 9.4. CONTRACTOR is required to ensure that material safety data sheets (MSDS's) for any material requiring a MSDS pursuant to any federal or state law are available in a readily accessible place on the Project premises. CONTRACTOR is also required to ensure (a) the proper labeling of any substance brought onto the Project premises by CONTRACTOR or any subcontractors or material suppliers, and (b) that the person(s) working with the material, or within the general area of the material, are appropriately informed about the hazards of the substance and follow proper handling and protection procedures.
- 9.5. CONTRACTOR is required to comply with Health & Safety Sections 25249 et seq. (Prop. 65), which requires the posting and giving of notice to persons who may be exposed to any chemical known to the State of California to cause cancer.
- 9.6. CONTRACTOR shall comply with Title VI of the Civil Rights Act of 1964 (PL 88-352) and all regulations or other requirements issued pursuant to that Act, including, without limitation, United States Department of Agriculture nondiscrimination regulations found at 7 CFR Part 15.
- 9.7. CONTRACTOR shall comply with the following provisions
  - Public Contract Code § 6109 prohibits a contractor from performing work with a subcontractor who is debarred pursuant to Labor Code §§ 1777.1 or 1777.7.
  - Public Contract Code § 9204 requires the City and contractors to follow a claims resolution process for public works contract disputes.
  - Article 1.5 (commencing at Section 20104) of Division 2, Part 3 of the Public Contract Code regarding the resolution of public works claims of less than \$375,000. Article 1.5 mandates certain procedures for the filing of claims and supporting documentation by Contractor, for the response to such claims by the Agency, for a mandatory meet and confer conference upon the request of Contractor, for mandatory nonbinding mediation in the event litigation is commenced, and for mandatory judicial arbitration upon the parties' failure to resolve the dispute through mediation. This AGREEMENT hereby incorporates the provisions of Article 1.5 as though fully set forth herein.
  - Public Contract Code §§ 10263, 22300 which allow CONTRACTOR to substitute securities for any monies withheld by the AGENCY to ensure performance under the Contract.
  - CONTRACTOR shall maintain any and all ledgers, books of account, invoices, vouchers, canceled checks, and other records or documents evidencing or relating to charges for services or expenditures and disbursements charged to AGENCY under this Agreement for a minimum of three (3) years, or for any longer period required by law, from the date of final payment to

CONTRACTOR under this Agreement. All such documents shall be made available for inspection, audit, and/or copying at any time during regular business hours, upon oral or written request of AGENCY. In addition, pursuant to Government Code Section 8546.7, all such documents and this Agreement shall be subject to the examination and audit of the State Auditor, at the request of AGENCY or as part of any audit of AGENCY, for a period of three (3) years after final payment under the Agreement.

9.8. CONTRACTOR shall comply with the Required Federal Contract Clauses set forth in Attachment 6 to this Agreement and incorporated herein by this reference.

#### **ARTICLE 10: PROGRESS SCHEDULE**

- 10.1. The CONTRACTOR shall submit within ten (10) days (or as specified in the Special Provisions for this Project) after execution of the Contract a detailed work schedule or schedules that details the actions of the CONTRACTOR and Subcontractors working at the Site in accordance with the requirements specified in Special Provisions. This schedule(s) shall show the dates at which the CONTRACTOR will start and complete the several parts of the work and shall conform to the completion time specified in the Contract. The CITY may submit comments on the work schedule. Acceptance of the schedule by CITY shall not constitute approval of the Plan by CONTRACTOR for completion of the work.
- 10.2. The CONTRACTOR shall review and, if necessary, revise the progress schedule at least once a month or as specified in the Special Provisions for this Project. In any event, the CONTRACTOR shall submit a current schedule to the Engineer at the Engineer's request at any time during the Contract period.
- 10.3. No progress payments will be made for any work performed until a satisfactory schedule has been submitted and approved by the Engineer. An updated schedule shall be required from the CONTRACTOR if the project falls ten (10) working days behind schedule. For delays or portions of delays for which the CONTRACTOR is responsible, no payment will be made or time extension allowed for increase in work force, equipment, and working hours needed to put the Project on schedule.

#### **ARTICLE 11: PROMPT PAYMENT PROVISIONS**

- 11.1. Prompt payment provisions in accordance with Section 20104.50 of the Public Contract Code shall apply to this contract.
- 11.2. If CITY fails to make a progress payment within thirty (30) days after receipt of an undisputed and properly submitted payment request from CONTRACTOR, CITY shall pay interest to CONTRACTOR equivalent to 0.833% per month (10% per annum).
- 11.3. CITY shall review each payment request as soon as practicable after receipt to determine whether the payment request is proper. Any payment request determined to be an improper payment request shall be returned to CONTRACTOR as soon as practicable, but not later than seven (7) days, after receipt. A request returned pursuant to this paragraph shall be accompanied by a document setting forth in writing the reasons why the payment request is not proper.

#### ARTICLE 12: ANTITRUST CLAIM ASSIGNMENT

12.1. In entering into a Public Works contract or a subcontract to supply goods, services, or materials pursuant to this Contract, the CONTRACTOR and all subcontractors shall offer and agree to assign to CITY all rights, title, and interest in and to all causes of action it may have under Section 4 of the Clayton Act (15 U.S.C. Sec. 15) or under the Cartwright Act (Chapter 2 [commencing with Section 16700] of Part 2 of Division 7 of the Business and Professions Code), arising from purchases of goods, services, or materials pursuant to the Contract or any subcontract. This assignment shall be made and become effective at the time the CITY tenders final payment to CONTRACTOR, without further acknowledgment by the parties.

#### **ARTICLE 13: PREVAILING WAGES**

- 13.1. CONTRACTOR acknowledges that it has examined the prevailing rate of per diem wages as established by the California Director of Industrial Relations. The CONTRACTOR agrees to pay workers not less than the applicable prevailing rate of per diem wages, as set forth in these requirements and Labor Code section 1770 et seq. CONTRACTOR agrees specifically to comply with the provisions of Labor Code sections 1720, 1773.3, 1776, and 1777.5, as well as Section 7 of the Department of Transportation Standard Specifications and these Contract Documents.
- 13.2. This AGREEMENT is further subject to 8-hour work day and wage and hour penalty law, including, but not limited to, Labor Code Sections 1810 and 1813 as follows:

Pursuant to the provisions of the Labor Code, eight hours' labor shall constitute a legal day's work. Work performed by CONTRACTOR's employees in excess of eight hours per day, and 40 hours during any one week, must include compensation for all hours worked in excess of eight hours per day, or 40 hours during any one week, at not less than one and one-half times the basic rate of pay. CONTRACTOR shall forfeit as a penalty to AGENCY \$200.00 or any greater penalty set forth in the Labor Code for each worker employed in the execution of the work by CONTRACTOR or by any Subcontractor of CONTRACTOR, for each Calendar Day during which such worker is required or permitted to the work more than eight hours in one Calendar Day or more than 40 hours in any one calendar week in violation of the Labor Code.

#### **ARTICLE 14: SEVERABILITY.**

14.1. Nothing contained in the Contract Documents shall be construed to require the commission of any act contrary to law. Should a conflict arise between any provisions contained herein and any present or future statute, law, ordinance, or regulation contrary to which the parties have no legal right to contract or act, the latter shall be curtailed and limited but only to the extent necessary to bring it within the requirements of the law. If such curtailment or limitation is not possible, the affected provision shall be of no force and effect. Except as previously mentioned, such illegality shall not affect the validity of this Contract.

#### **ARTICLE 15: COMPLETE AGREEMENT**

15.1. These Contract Documents supersede any and all agreements, either oral or in writing, between the parties with respect to the subject matter herein. Each party to this Contract acknowledges that no representation by any party, which is not embodied herein, or any other agreement, statement, or promise not contained in these Contract Documents shall be valid and binding.

#### **ARTICLE 16: INTERPRETATION**

- 16.1. The parties hereto acknowledge and agree that each has been given the opportunity to independently review this Contract with legal counsel, and/or has the requisite experience and sophistication to understand, interpret and agree to the particular language of the provisions of the Contract.
- 16.2. In case of a controversy or dispute between the parties concerning the provisions herein, this document shall be interpreted according to the provisions herein and no presumption shall arise concerning the draftsmanship of such provision.

#### **ARTICLE 17: GOVERNING LAW**

17.1. This Contract is subject to the laws and jurisdiction of the State of California. Venue for any legal proceeding brought in conjunction with this Contract shall be the Superior Court of the County of Nevada, State of California. Contractor waives any federal court removal rights it may have pursuant to any applicable law.

#### **ARTICLE 18: BID ITEMS**

#### **BID ITEMS**

BID ITEM	DESCRIPTION	TOTAL COST
1	STREETSCAPE IMPROVEMENTS (MILL STREET)	
2	STREETSCAPE IMPROVEMENTS (MAIN STREET)	
3	MILL STREET WATER LINE REPLACEMENT	

TOTAL COST (	<b>ITEMS 1, 2</b>	, AND 3):	\$
		, , , .	Ψ

#### **ADDITIVE BID ITEM**

BID ITEM	DESCRIPTION	TOTAL COST
Α	STREETSCAPE IMPROVEMENTS (WEST MAIN STREET / MILL STREET INTERSECTION)	

TOTAL COST	(ITEMS 1, 2, 3, and	Λ)· ¢	
IUIAL COST	III EIVIO I, Z, J, AIIU	A). J	

- (1) Costs are to be all inclusive, including materials, labor, shipping, tax, etc.
- (2) A detailed schedule of values will be required.

Name	of Co	ntracto	or/Co	mpar	าง		

WITNESS WHEREOF, the parties have hereunto set their hands the year and date first above written.

"CITY" CITY OF GRASS VALLEY	"CONTRACTOR" (Type full legal name of contractor, entity
By:	type, state of organization here)
Ben Aguilar, Mayor	Ву:
Date:	Officer Signature # 1 (Signature Notarized)
Award of Contract No By the City Council On:	By: Print Name and Title
Date:	Date:
APPROVED AS TO PROCEDURE	By:
_	By: Officer Signature # 2
By: Bjorn P. Jones, PE	(Signature Notarized)
Assistant City Engineer	Du:
	By: Print Name and Title
Date:	Time tame and Time
	Date:
APPROVED AS TO FORM	
By: Michael G. Colantuono City Attorney	Licensed in accordance with an act providing for the registration of Contractors,
Date:	Contractor's License Number:
ATTEST:	
ATTEST.	
By: Taylor Day Deputy City Clerk	
Date:	

If Contractor is another type of business entity, such as a partnership or limited liability company, contract must be signed by officer(s) possessing legal authority to bind the entity. An authenticated copy of a resolution, partnership agreement, operating agreement or other legal evidence of signature authority must be attached to this contract."

<sup>&</sup>quot;If Contractor is a corporation, contract must be signed by the following two corporate officers, one from each category: (1) Chairman of the Board, President or any Vice President, <u>and</u> (2), Corporate Secretary, any Assistant Corporate Secretary, Chief Financial Officer or any Treasurer or Assistant Treasurer, unless an authenticated copy of a resolution of the corporation which delegates to a single officer the authority to bind the corporation is attached to this contract.

#### **ATTACHMENTS**

- 1. Certification Labor Code Section 1861
- 2. Bond for Labor & Materials
- 3. Bond for Faithful Performance
- 4. List of Subcontractors
- 5. Required Federal Contract Clauses

#### **CERTIFICATION**

#### **LABOR CODE SECTION 1861**

STATE (	OF CALIF	ORNIA
CITY OF	GRASS	<b>VALLEY</b>

I, the undersigned, do hereby certify:

That I am aware of the provisions of Section 3700 of the Labor Code of the State of California, which requires every employer to be insured against liability for Workers' Compensation or to undertake self insurance in accordance with the provisions of that code, and I will comply with such provisions before commencing the performance of the work of this contract.

Executed at :\_\_\_\_\_

On:	
certify under the penalty of pe	erjury that the foregoing is true and correct.
	CONTRACTOR - EMPLOYER
	BY:
	PRINT NAME:  TITLE:

#### **BOND FOR LABOR AND MATERIALS**

KNOW ALL MEN BY THESE PRESENTS THAT WHEREAS, CITY OF GRASS VALLEY, STATE OF CALIFORNIA, hereinafter called the "Owner" has awarded to, as Principal, hereinafter designated as the "Contractor," a contract for the work described as follows:						
DOWNTOWN STREETSCAPE IMPROVEMENTS PROJE	CT NO. 21-12					
AND, WHEREAS, the Contractor is required to furnish a both the payment of claims of laborers, mechanics, materialment						
NOW, THEREFORE, we, the undersigned Contractor and are held and firmly bound unto the Owner in the Doll	amount required by law, in the sum of					
which payment well and truly to be made we bind ourselv successors and assigns, jointly and severally, firmly by the	ves, our heirs, executors and administrators,					
THE CONDITION of this obligation is such, that if the administrators, successors or assigns, or subcontractors in Civil Code 9100, amounts due under the Unemployment performed by any such claimant, or amount due the Franch that the surety or sureties herein will pay for the same, in all bond, otherwise the above obligation shall be void. In case will pay reasonable attorneys' fee to be fixed by the court.	shall fail to pay any of the persons referred to Insurance Code with respect to work or labor ise Tax Board as provided in Civil Code 9554, mount not exceeding the sum specified in this					
This bond shall insure to the benefit of any of the persons right of action to such persons or their assigns in any sui action shall be subject to the provisions of Civil Code 8608	t brought upon this bond. Any such right of					
PROVIDED, FURTHER, that the said surety, for value re change, extension of time, alteration or addition to the terms thereunder or the specifications accompanying the same bond, and it does hereby waive notice of any change, exten of the contract or to the work or to the specifications.	s of the contract or to the work to be performed shall in any way affect its obligation on this					
PROVIDED, FURTHER, that no settlement between the Ov of any beneficiary hereunder, whose claim may be unsatisf						
PROVIDED, FURTHER, that surety covenants that it is California as defined by California Code of Civil Procedure						
*SURETY <u>Attorney-In-Fact</u> (Signature must be notarized) Date:	CONTRACTOR (Signature must be notarized) Date:					
Address of Surety:						

<sup>\*</sup> ATTORNEY-IN-FACT MUST HAVE POWER OF ATTORNEY ON FILE WITH CITY CLERK OF CITY OF GRASS VALLEY OR INCLUDE A COPY OF POWER OF ATTORNEY WITH THIS BOND.

#### **BOND OF FAITHFUL PERFORMANCE**

KNOW ALL MEN BY	THESE PRES	EN12 II	HAI W	/E								
the Contractor in the C	Contract hereto	annexed	l, as pr	incipa	ıl, and							
as Surety are held	d and firmly	bound			•			Valley ا lawful (				
States, for which paym	nent well and f	truly to be										
these presents	ient, well and	irdiy to be	Tilaud	s, we	DITIG C	uisc	ives, jo	initiy and	300	crany	, ,,,,,,,,,	, Dy
The condition of the abshall faithfully perform furnish all tools, equipping any, agreed to be for complete in a good we period of one year foll IMPROVEMENTS PROCEDURATE CONTRACT HERED AND STATE OF THE CONTRACT HERED AND STATE OF THE CONTRACT OF THE CONT	each and all of ment, apparaturation urnished by the orkmanlike may owing the accessory of the and void, other and void, other and the work to the work to be, affect its ob	of the conus, facilities of CITY, inner, and eptance of the control of the contro	ditions ditions ditions display the graph of	s of sansport sary to arrant project formit ear follinge, ear there bond,	ation, o performed action, or performed action to the control of t	ntractilaboorm cepta work the the and or the t doe	t to be property and no concepts of <b>DO</b> terms and accepts of time, ne species herel	performed material, mplete, a formand WNTOW and condi- ance of the and the se alterations by waive	ed by other and the of the property of the pro	him, r than to pe the vertex free the vertex addition of the vertex to the vertex free the ver	and so mate rform work for the forth in the form	shall erial, and or a <b>APE</b> the the the uch
Surety further agrees obligation herein, all coupling the Court, and to be	ourt costs, exp	enses, ai	nd all r	reasor	nable	attor	ney's fe	es to be	e awa	arded		
*SURETY <u>Attor</u> (Signature mus Date:	st be notarized)		-		(Sigr	natur		be notar	,			
Address of Surety:*ATTORNEY-IN-FAC			R OF A	ATTOF	RNEY	ON I	FILE W	ITH CIT	— Y CL	.ERK	OF C	ITY

OF GRASS VALLEY OR INCLUDE A COPY OF POWER OF ATTORNEY WITH THIS BOND.

#### LIST OF SUBCONTRACTORS

The Contractor shall list the name, address, and contractor's license classification and number of each Subcontractor required to be listed by Section 2-1.054, "Required Listing of Proposed Subcontractors," of the Standard Specifications, and the Special Provisions, and designate the portion and percentage of the work to be performed by the Subcontractor, to whom the bidder proposes to subcontract portions of the work. The California contractor license designation and number shall be included for all subcontractors doing work in excess of one half of one percent of the total Project bid price, or ten thousand dollars (\$10,000.00), whichever is greater.

Subcontractor Name, Address & Email	License Designation Number	Description of Portion of Work Contracted With Applicable Bid Item(s)	% of Work per Bid Item	Dollar Amount of Work

#### REQUIRED FEDERAL CONTRACT CLAUSES

During the performance of this contract, Contractor shall comply with all applicable federal laws and regulations including but not limited to the federal contract provisions in this Exhibit. The U.S. Treasury Department is considered the "Federal Agency" under this Attachment 6.

#### 1. COST PRINCIPLES (2 C.F.R. PART 200, SUBPART E)

(A) If any indirect costs will be charged to the Agency under this contract, such costs must conform to the cost principles set forth under the Uniform Rules at 2 C.F.R. Part 200, subpart E ("Cost Principles"). In general, costs must (i) be necessary and reasonable; (ii) allocable to the grant award; (iii) conform to any limitations or exclusions set forth in the Cost Principles; (iv) be adequately documented; and (v) be determined in accordance with generally accepted accounting principles ("GAAP"), except, for state and local governments and Indian tribes only, as otherwise provided for in 2 C.F.R. Part 200, subpart E. 2 C.F.R. § 200.403. Costs that are determined unallowable pursuant to a federal audit are subject to repayment by Contractor.

#### 2. ACCESS TO RECORDS & RECORD RETENTION (2 C.F.R. 200.336)

- (A) Contractor shall comply with 2 C.F.R. § 200.336 and provide the Federal Agency, Inspectors General, the Comptroller General of the United States, Agency, and the State of California or any of their authorized representatives access, during normal business hours, to documents, papers, books and records which are directly pertinent to this contract for the purposes of making and responding to audits, examinations, excerpts, and transcriptions. The right also includes timely and reasonable access to Contractor's personnel for the purpose of interview and discussion related to the books and records.
- (B) Contractor agrees to permit any of the foregoing parties to reproduce by any means whatsoever or to copy excerpts and transcriptions as reasonably needed.
- (C) Contractor agrees to provide the Federal Agency or its authorized representatives access to construction or other work sites pertaining to the work being completed under the contract.

### 3. REQUIRED CONTRACT PROVISIONS IN ACCORDANCE WITH APPENDIX II TO PART 200 – CONTRACT PROVISIONS FOR NON-FEDERAL ENTITY CONTRACTS UNDER FEDERAL AWARDS (2 C.F.R. § 200.326)

- Appendix II to Part 200 (A); Appendix II to Part 200 (B): Remedies for Breach; Termination for Cause/Convenience. If the contract is in excess of \$10,000 and the contract does not include provisions for both termination for cause and termination for convenience by the Agency, including the manner by which it will be effected and the basis for settlement, then the following termination clauses shall apply. If the contract is for more than the simplified acquisition threshold (see 2 C.F.R. § 200.88) at the time the contract is executed and does not provide for administrative, contractual, or legal remedies in instances where Contractor violates or breaches the terms of the contract, then the following termination clauses shall apply and have precedence over the contract. Otherwise, the following termination clauses shall not be applicable to the contract.
  - (i) <u>Termination for Convenience.</u> The Agency may, by written notice to Contractor, terminate this contract for convenience, in whole or in part, at any time by giving

written notice to Contractor of such termination, and specifying the effective date thereof ("Notice of Termination for Convenience"). If the termination is for the convenience of the Agency, the Agency shall compensate Contractor for work or materials fully and adequately provided through the effective date of termination. No amount shall be paid for unperformed work or materials not provided, including anticipated profit. Contractor shall provide documentation deemed adequate by the Agency to show the work actually completed or materials provided by Contractor prior to the effective date of termination. This contract shall terminate on the effective date of the Notice of Termination.

- (ii) Termination for Cause. If Contractor fails to perform pursuant to the terms of this contract, the Agency shall provide written notice to Contractor specifying the default ("Notice of Default"). If Contractor does not cure such default within ten (10) calendar days of receipt of Notice of Default, the Agency may terminate this contract for cause. If Contractor fails to cure a default as set forth above, the Agency may, by written notice to Contractor, terminate this contract for cause, in whole or in part, and specifying the effective date thereof ("Notice of Termination for Cause"). If the termination is for cause, Contractor shall be compensated for that portion of the work or materials provided which has been fully and adequately completed and accepted by the Agency as of the date the Agency provides the Notice of Termination. In such case, the Agency shall have the right to take whatever steps it deems necessary to complete the project and correct Contractor's deficiencies and charge the cost thereof to Contractor, who shall be liable for the full cost of the Agency's corrective action, including reasonable overhead, profit and attorneys' fees.
- (iii) <u>Reimbursement</u>; <u>Damages</u>. The Agency shall be entitled to reimbursement for any compensation paid in excess of work rendered or materials provided and shall be entitled to withhold compensation for defective work or other damages caused by Contractor's performance of the work.
- (iv) Additional Termination Provisions. Upon receipt of a Notice of Termination, either for cause or for convenience, Contractor shall promptly discontinue the work unless the Notice directs to the contrary. Contractor shall deliver to the Agency and transfer title (if necessary) to all provided materials and completed work, and work in progress including drafts, documents, plans, forms, maps, products, graphics, computer programs and reports. The rights and remedies of the parties provided in this Section are in addition to any other rights and remedies provided by law or under this contract. Contractor acknowledges the Agency's right to terminate this contract with or without cause as provided in this Section, and hereby waives any and all claims for damages that might arise from the Agency's termination of this contract. The Agency shall not be liable for any costs other than the charges or portions thereof which are specified herein. Contractor shall not be entitled to payment for unperformed work or materials not provided, and shall not be entitled to damages or compensation for termination of work or supply of materials. If Agency terminates this contract for cause, and it is later determined that the termination for cause was wrongful, the termination shall automatically be converted to and treated as a termination for convenience. In such event, Contractor shall be entitled to receive only the amounts payable under this Section, and Contractor specifically waives any claim for any other amounts or damages, including, but not limited to, any claim for consequential damages or lost

- profits. The rights and remedies of the Agency provided in this Section shall not be exclusive and are in addition to any other rights and remedies provided by law, equity or under this contract including, but not limited to, the right to specific performance.
- (B) Appendix II to Part 200 (C) Equal Employment Opportunity: Except as otherwise provided under 41 C.F.R. Part 60, Contractor shall comply with the following equal opportunity clause, in accordance with Executive Order 11246 of September 24, 1965 entitled "Equal Employment Opportunity," as amended by Executive Order 11375 of October 13, 1967 and implementation regulations at 41 C.F.R. Chapter 60:
  - (i) Contractor will not discriminate against any employee or applicant for employment because of race, color, religion, sex, or national origin. Contractor will take affirmative action to insure that applicants are employed and that employees are treated equally during employment, without regard to race, color, religion, sex, or national origin. Such action shall include, but not be limited to, the following: employment upgrading, demotion, transfer, recruitment, or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training including apprenticeship. Contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided by the Agency setting forth the provisions of this nondiscrimination clause.
  - (ii) Contractor will, in all solicitations or advertisements for employees placed by or on behalf of Contractor, state that all qualified applicants will receive consideration for employment without regard to their race, color, religion, sex, or national origin.
  - (iii) Contractor will not discharge or in any other manner discriminate against any employee or applicant for employment because such employee or applicant has inquired about, discussed, or disclosed the compensation of the employee or applicant or another employee or applicant. This provision shall not apply to instances in which an employee who has access to the compensation information of other employees or applicants as a part of such employee's essential job functions discloses the compensation of such other employees or applicants to individuals who do not otherwise have access to such information, unless such disclosure is in response to a formal complaint or charge, in furtherance of an investigation, proceeding, hearing, or action, including an investigation conducted by the employer, or is consistent with Contractor's legal duty to furnish information.
  - (iv) Contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other contract or understanding, a notice, to be provided by the agency contracting officer, advising the labor union or workers' representative of the contractor's commitments under Section 202 of Executive Order No. 11246 of September 24, 1965, and shall post copies of the notice in conspicuous places available to employees and applicants for employment.
  - (v) Contractor will comply with all provisions of Executive Order 11246 of September 24, 1965, and of the rules, regulations, and relevant orders of the Secretary of Labor.
  - (vi) Contractor will furnish all information and reports required by Executive Order No. 11246 of September 24, 1965, and by the rules, regulations, and orders of the Secretary of Labor, or pursuant thereto, and will permit access to his books, records, and accounts

- by the contracting agency and the Secretary of Labor for purposes of investigation to ascertain compliance with such rules, regulations, and orders.
- (vii) In the event of Contractor's noncompliance with the nondiscrimination clauses of this contract or with any of such rules, regulations, or orders, this contract may be cancelled, terminated or suspended in whole or in part and the contractor may be declared ineligible for further Government contracts in accordance with procedures authorized in Executive Order No.11246 of Sept. 24, 1965, and such other sanctions may be imposed and remedies invoked as provided in Executive Order No.11246 of September 24, 1965, or by rule, regulation, or order of the Secretary of Labor, or as otherwise provided by law.
- (viii) Contractor will include the provisions of paragraphs (i) through (viii) in every subcontract or purchase order unless exempted by rules, regulations, or orders of the Secretary of Labor issued pursuant to Section 204 of Executive Order No. 11246 of September 24,1965, so that such provisions will *be* binding upon each subcontractor or Contractor. Contractor will take such action with respect to any subcontract or purchase order as may be directed by the Secretary of Labor as a means of enforcing such provisions including sanctions for noncompliance: *Provided, however*, that in the event Contractor becomes involved in, or is threatened with, litigation with a subcontractor or Contractor as a result of such direction, Contractor may request the United States to enter into such litigation to protect the interests of the United States.
- (C) <u>Appendix II to Part 200 (D) Davis-Bacon Act; Copeland Act:</u> Not applicable to this contract.
- (D) Appendix II to Part 200 (E) Contract Work Hours and Safety Standards Act:
  - (i) If this contract is in excess of \$100,000 and involves the employment of mechanics or laborers, Contractor shall comply with 40 U.S.C. 3702 and 3704, as supplemented by Department of Labor regulations (29 C.F.R. Part 5). Under 40 U.S.C. 3702, each contractor must be required to compute the wages of every mechanic and laborer on the basis of a standard work week of 40 hours. Work in excess of the standard work week is permissible provided that the worker is compensated at a rate of not less than one and a half times the basic rate of pay for all hours worked in excess of 40 hours in the work week. The requirements of 40 U.S.C. 3704 are applicable to construction work and provide that no laborer or mechanic must be required to work in surroundings or under working conditions which are unsanitary, hazardous or dangerous. These requirements do not apply to the purchases of supplies or materials or articles ordinarily available on the open market, or contracts for transportation or transmission of intelligence.
  - (ii) No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

- (iii) In the event of any violation of the clause set forth in paragraph (ii) of this section the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (ii) of this section, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (ii) of this section.
- (iv) The Agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by Contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (iii) of this section.
- (v) Contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (ii) through (v) of this Section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The Contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (ii) through (v) of this Section.

#### (E) Appendix II to Part 200 (F) – Rights to Inventions Made Under a Contract or Agreement:

- (i) If the Federal award meets the definition of "funding agreement" under 37 C.F.R. § 401.2(a) and the non-Federal entity wishes to enter into a contract with a small business firm or nonprofit organization regarding the substitution of parties, assignment or performance of experimental, developmental, or research work under that "funding agreement," the non-Federal entity must comply with the requirements of 37 C.F.R. Part 401 (Rights to Inventions Made by Nonprofit Organizations and Small Business Firms Under Government Grants, Contracts and Cooperative Agreements), and any implementing regulations issued by the Agency.
- (ii) The regulation at 37 C.F.R. § 401.2(a) currently defines "funding agreement" as any contract, grant, or cooperative agreement entered into between any Federal agency, other than the Tennessee Valley Authority, and any contractor for the performance of experimental, developmental, or research work funded in whole or in part by the Federal government. This term also includes any assignment, substitution of parties, or subcontract of any type entered into for the performance of experimental, developmental, or research work under a funding agreement as defined in the first sentence of this paragraph.
- (F) <u>Appendix II to Part 200 (G) Clean Air Act and Federal Water Pollution Control Act:</u> If this contract is in excess of \$150,000, Contractor shall comply with all applicable

standards, orders, or requirements issued pursuant to the Clean Air Act (42 U.S.C. 7401-7671q) and the Federal Water Pollution Control Act as amended (33 U.S.C. 1251-1387).

- (i) Pursuant to the Clean Air Act, (1) Contractor agrees to comply with all applicable standards, orders or regulations issued pursuant to the Clean Air Act, as amended, 42 U.S.C. § 7401 et seq., (2) Contractor agrees to report each violation to the Agency and understands and agrees that the Agency will, in turn, report each violation as required to assure notification to the Federal awarding agency and the appropriate Environmental Protection Agency Regional Office, and (3) Contractor agrees to include these requirements in each subcontract exceeding \$150,000.
- (ii) Pursuant to the Federal Water Pollution Control Act, (1) Contractor agrees to comply with all applicable standards, orders or regulations issued pursuant to the Federal Water Pollution Control Act, as amended, 33 U.S.C. 1251 et seq., (2) Contractor agrees to report each violation to the Agency and understands and agrees that the Agency will, in turn, report each violation as required to assure notification to the Federal awarding agency and the appropriate Environmental Protection Agency Regional Office, and (3) Contractor agrees to include these requirements in each subcontract exceeding \$150,000.
- (G) Appendix II to Part 200 (H) Debarment and Suspension: A contract award (see 2 C.F.R. § 180.220) must not be made to parties listed on the government wide exclusions in the System for Award Management (SAM), in accordance with the OMB guidelines at 2 CFR 180 that implement Executive Orders 12549 (3 C.F.R. part 1986 Comp., p. 189) and 12689 (3 C.F.R. part 1989 Comp., p. 235), "Debarment and Suspension." SAM Exclusions contains the names of parties debarred, suspended, or otherwise excluded by agencies, as well as parties declared ineligible under statutory or regulatory authority other than Executive Order 12549.
  - (i) This contract is a covered transaction for purposes of 2 C.F.R. pt. 180 and 2 C.F.R. pt. 3000. As such Contractor is required to verify that none of the Contractor, its principals (defined at 2 C.F.R. § 180.995), or its affiliates (defined at 2 C.F.R. § 180.905) are excluded (defined at 2 C.F.R. § 180.940) or disqualified (defined at 2 C.F.R. § 180.935).
  - (ii) Contractor must comply with 2 C.F.R. pt. 180, subpart C and 2 C.F.R. pt. 3000, subpart C and must include a requirement to comply with these regulations in any lower tier covered transaction it enters into.
  - (iii) This certification is a material representation of fact relied upon by Agency. If it is later determined that Contractor did not comply with 2 C.F.R. pt. 180, subpart C and 2 C.F.R. pt. 3000, subpart C, in addition to remedies available to the Agency, the Federal Government may pursue available remedies, including but not limited to suspension and/or debarment.
  - (iv) Contractor warrants that it is not debarred, suspended, or otherwise excluded from or ineligible for participation in any federal programs. Contractor also agrees to verify that all subcontractors performing work under this contract are not debarred, disqualified, or otherwise prohibited from participation in accordance with the requirements above. Contractor further agrees to notify the Agency in writing

immediately if Contractor or its subcontractors are not in compliance during the term of this contract.

(H) Appendix II to Part 200 (I) – Byrd Anti-Lobbying Act: If this contract is in excess of \$100,000, Contractor shall have submitted and filed the required certification pursuant to the Byrd Anti-Lobbying Amendment (31 U.S.C. § 1353). If at any time during the contract term funding exceeds \$100,000.00, Contractor shall file with the Agency the Federal Standard Form LLL titled "Disclosure Form to Report Lobbying." Contractors that apply or bid for an award exceeding \$100,000 must file the required certification. Each tier certifies to the tier above that it will not and has not used Federal appropriated funds to pay any person or organization for influencing or attempting to influence an officer or employee of any agency, a member of Congress, officer or employee of Congress, or an employee of a member of Congress in connection with obtaining any Federal contract, grant or any other award covered by 31 U.S.C. 1352. Each tier must also disclose any lobbying with non-Federal funds that takes place in connection with obtaining any Federal award. Such disclosures are forwarded from tier to tier up to the recipient.

#### (I) Appendix II to Part 200 (J) – Procurement of Recovered Materials:

- (i) Contractor shall comply with section 6002 of the Solid Waste Disposal Act, as amended by the Resource Conservation and Recovery Act. The requirements of Section 6002 include procuring only items designated in guidelines of the Environmental Protection Agency (EPA) at 40 C.F.R. part 247 that contain the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition, where the purchase price of the item exceeds \$10,000 or the value of the quantity acquired during the preceding fiscal year exceeded \$10,000; procuring solid waste management services in a manner that maximizes energy and resource recovery; and establishing an affirmative procurement.
- (ii) In the performance of this contract, Contractor shall make maximum use of products containing recovered materials that are EPA-designated items unless the product cannot be acquired: Competitively within a timeframe providing for compliance with the contract performance schedule; Meeting contract performance requirements; or at a reasonable price.
- (iii) Information about this requirement, along with the list of EPA-designate items, is available at EPA's Comprehensive Procurement Guidelines web site, https://www.epa.gov/smm/comprehensive-procurement-guideline-cpg-program.

#### 4. MISCELLANEOUS PROVISIONS

- (A) This is an acknowledgement that Federal funding provided to the City as a recipient of funds under the American Rescue Plan Act will be used to fund the contract. Contractor shall comply with all applicable federal law, regulations, executive orders, policy procedures, and directives. This includes, but is not limited to, the following provisions of Federal law, which may be expressly described in further detail above:
  - (i) Uniform Administrative Requirements, Cost Principles, and Audit Requirements for Federal Awards, 2 C.F.R. Part 200.
  - (ii) Universal Identifier and System for Award Management (SAM), 2 C.F.R. Part 25, pursuant to which the award term set forth in Appendix A to 2 C.F.R. Part 25.

- (iii) Reporting Subaward and Executive Compensation Information, 2 C.F.R. Part 170, pursuant to which the award term set forth in Appendix A to 2 C.F.R. Part 170.
- (iv) OMB Guidelines to Agencies on Governmentwide Debarment and Suspension (Nonprocurement), 2 C.F.R. Part 180, including the requirement to include a term or condition in all lower tier covered transactions (contracts and subcontracts described in 2 C.F.R. Part 180, subpart B) that the award is subject to 2 C.F.R. Part 180 and Treasury's implementing regulation at 31 C.F.R. Part 19.
- (v) Recipient Integrity and Performance Matters, pursuant to which the award term set forth in 2 C.F.R. Part 200, Appendix XII to Part 200.
- (vi) Governmentwide Requirements for Drug-Free Workplace, 31 C.F.R. Part 20.
- (vii) Restrictions on Lobbying, 31 C.F.R. Part 21.
- (viii) Uniform Relocation Assistance and Real Property Acquisitions Act of 1970 (42 U.S.C. §§ 4601-4655) and implementing regulations.
- (ix) Title VI of the Civil Rights Act of 1964 (42 U.S.C. §§ 2000d et seq.) and U.S. Treasury Department's implementing regulations at 31 C.F.R. Part 22.
- (x) The Fair Housing Act, Title VIII of the Civil Rights Act of 1968 (42 U.S.C. §§ 3601 et seq.).
- (xi) Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. § 794).
- (xii) The Age Discrimination Act of 1975, as amended (42 U.S.C. §§ 6101 et seq.), and U.S. Treasury Department's implementing regulations at 31 C.F.R. Part 23.
- (xiii) Title II of the Americans with Disabilities Act of 1990, as amended (42 U.S.C. §§ 12101 et seq.).
- (xiv) Any other generally applicable federal environmental laws and regulations.

# EXHIBIT 6 SPECIAL PROVISIONS



### CITY OF GRASS VALLEY PUBLIC WORKS DEPARTMENT ENGINEERING DIVISION

#### **SPECIAL PROVISIONS**

#### **FOR**

DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT PROJECT NO. 21-12

#### **TABLE OF CONTENTS**

	<u>Pa</u>	<u>ge Number</u>
INSTRUCTION	S TO BIDDERS	1
	NERAL SPECIFICATIONS AND PLANS	
1-1.01	GENERALGENERAL	
1-1.01	REVISED STANDARD SPECIFICATIONS AND STANDARD PLANS	
1-1.02	DEFINITIONS AND TERMS	
	DDING	
2-1.01	GENERAL REQUIRED LISTING OF PROPOSED PRODUCTS "OR EQUALS"	
2-1.02		
2-1.03 2-1.04	SUBCONTRACTOR LISTBIDDER'S SECURITY	
2-1.04 2-1.05	NON-COLLUSION AFFIDAVIT	
2-1.05 2-1.06	DISADVANTAGE BUSINESS ENTERPRISES (DBE)	
	NTRACT AWARD AND EXECUTION	
3-1.01	GENERAL	
3-1.02	AWARD OF CONTRACT	
3-1.03	CONTRACT BONDS	10
	GINNING OF WORK, TIME OF COMPLETION, AND LIQUIDATED DAMAGES	
4-1.01	GENERAL	
4-1.02	HOLIDAYS	11
4-1.03	WINTERIZATION	
4-1.04	PRE-CONSTRUCTION CONFERENCE	
4-1.05	ARCHAEOLOGICAL FINDS	
4-1.06	EXTRA WORK	12
4-1.07	SCOPE OF WORK	
4-1.08	ELIMINATION OF ITEMS OF WORK	12
SECTION 5 GE	NERAL	12
SECTION 5-1	MISCELLANEOUS	12
5-1.01	LABOR NONDISCRIMINATION	
5-1.02	LABOR CODE REQUIREMENTS	
5-1.03	PREVAILING WAGE	
5-1.04	SUBCONTRACTING	
5-1.05	PROMPT PROGRESS PAYMENT TO SUBCONTRACTORS	
5-1.06	PROMPT PAYMENT OF WITHHELD FUNDS TO SUBCONTRACTORS	
5-1.07	PAYMENTS	
5-1.08	INTEREST ON PAYMENTS	
5-1.09	WITHHOLDS	14
5-1.10	PLANS AND WORKING DRAWINGS	14
5-1.11	EXAMINATION OF PLANS, SPECIFICATIONS, CONTRACT, AND SITE OF WO	
5-1.12	DIFFERING SITE CONDITIONS	14
5-1.13	VALUE ENGINEERING	14
5-1.14	PUBLIC SAFETY	15
5-1.15	TESTING	16
5-1.16	RESPONSIBILITY TO OTHER ENTITIES	16
5-1.17	AREAS FOR CONTRACTOR'S USE	
5-1.18	SOUND CONTROL REQUIREMENTS	17
5-1.19	PROJECT APPEARANCE	17
5-1.20	RECORDS	
5-1.21	RELATIONS WITH CALIFORNIA REGIONAL WATER QUALITY CONTROL E	
5-1.22	CONTRACTOR'S LICENSING LAWS	
5-1.23	ARBITRATION	18

5-1.24	NOTICE OF POTENTIAL CLAIM	20
5-1.25	FINAL PAYMENT AND CLAIMS	
5-1.26	SURFACE MINING AND RECLAMATION ACT	
5-1.27	REMOVAL OF ASBESTOS AND HAZARDOUS SUBSTANCES	20
5-1.28	EXCAVATION SAFETY PLANS	21
5-1.29	AIR POLLUTION CONTROL	21
5-1.30	PERMITS	
5-1.31	INSURANCE	21
5-1.3		
5-1.3		
5-1.3		
5-1.3		
5-1.3		22
5-1.3		
5-1.32	WARRANTY	23
SECTION 6 (BLA	ANK)	23
SECTION 7 (BLA	ANK)	23
	ΓERIALS	
SECTION 8-1	MISCELLANEOUS	
8-1.0		
	PORTLAND CEMENT CONCRETE	
SECTION 9 (BLA	ANK)	25
SECTION 10	CONSTRUCTION DETAILS	25
SECTION 10-1	GENERAL	25
10-1.01	SCOPE OF WORK	
10-1.02	GENERAL REQUIREMENTS	25
10-1.03	REQUEST FOR INFORMATION	26
10-1.04	LINES AND GRADES	26
10-1.05	FINAL DESIGN AND ENGINEERING	26
10-1.06	WATER POLLUTION CONTROL	27
10-1.		
10-1.	.06.2 WATER POLLUTION CONTROL IMPLEMENTATION	
	.06.3 PAYMENT	
	.06.4 CONSTRUCTION SITE MANAGEMENT	
	.06.5 TEMPORARY CONCRETE WASHOUT FACILITY	
10-1.07	PROPERTY AND FACILITY PRESERVATION	
10-1.08	COOPERATION	
10-1.09	PROGRESS SCHEDULE	
10-1.10	OBSTRUCTIONS	
10-1.11	DUST CONTROL	
10-1.12	MOBILIZATIONCONSTRUCTION AREA TRAFFIC CONTROL DEVICES	
10-1.13		
10-1.14 10-1.15	CONSTRUCTION AREA SIGNS TEMPORARY OBJECT MARKERS	
10-1.13	MAINTAINING TRAFFIC	
10-1.16		
	.17.1 CLOSURE SCHEDULE	
	.17.1 CEOSORE SCHEDULE	
	.17.3 LATE REOPENING OF CLOSURES	
	.17.4 PAYMENT	
10-1.18	TRAFFIC CONTROL SYSTEM	
10-1.		
	FLAGGING COSTS	

10-1.20	PORTABLE FLASHING BEACONS	47
10-1.21	BARRICADES	47
10-1.22	TEMPORARY PAVEMENT DELINEATION	48
10-1.		
10-1.	22.2 TEMPORARY LANELINE AND CENTERLINE DELINEATION	48
10-1.	22.3 TEMPORARY EDGELINE DELINEATION	48
10-1.	22.4 TEMPORARY TRAFFIC STRIPE (TAPE)	49
10-1.	22.5 TEMPORARY TRAFFIC STRIPE (PAINT)	49
10-1.	22.6 TEMPORARY PAVEMENT MARKING (TAPE)	50
10-1.	22.7 TEMPORARY PAVEMENT MARKING (PAINT)	50
10-1.		
10-1.		
10-1.23	TEMPORARY RAILING	51
10-1.24	CHANNELIZERS	51
10-1.25	CLEARING, GRUBBING AND REMOVAL	51
10-1.26	TREE REMOVAL	52
10-1.27	EXISTING FACILITIES	52
10-1.	27.1 REMOVE ASPHALT CONCRETE	52
10-1.	27.2 REMOVE CONCRETE	53
10-1.	27.3 REMOVE POST	53
10-1.		
10-1.		
10-1.		
	27.7 RESET UTILITY COVER TO GRADE	
	WATERING	
	EARTHWORK	
10-1.		
10-1.		
10-1.30	GRIND HMA PAVEMENT	
10-1.31	ADJUST UTILITY COVER TO GRADE	50
10-1.32	AGGREGATE BASE	
10-1.33	SLURRY CEMENT BACKFILL	
10-1.34	UTILITY TRENCH BEDDING AND BACKFILL	
10-1.35	34-INCH CRUSHED ROCK	
10-1.36	AREA DRAIN INLET	
10-1.37	DRAINAGE INLET	
10-1.38	TRENCH DRAIN	
10-1.39	DRAINAGE PIPE	
10-1.40	REINFORCEMENT	
	MINOR CONCRETE	
10-1.42	DETECTABLE WARNING SURFACE	
10-1.44	THERMOPLASTIC TRAFFIC STRIPE AND PAVEMENT MARKING	61
10-1.45	ROADSIDE SIGN	
10-1.43		
10-1.		_
10-1.46	PERMEABLE PAVERS	
10-1.47	PLANTERS	
10-1.47	RAILING	
10-1.49	BOLLARD ASSEMBLY	
10-1.49	PG&E COORDINATION	
10-1.50	ELECTRICAL METER PEDESTAL	
10-1.51	ELECTRICAL METER TEDESTAL  ELECTRICAL CONDUIT	
10-1.52	PULL BOX	
10-1.54	STREETLIGHT ASSEMBLY	
10-1.54	GFCI RECEPTACLE	
10-1.55	INGROUND LIGHTING	
10-1.50	LANDSCAPING	
10-1.57 10-1.		
10-1.	57.2 COMPOST	68

10-1.58	IRRI	GATION SYSTEM	68
10-1.	.58.1	WIRING	68
10-1.	.58.2	PLASTIC PIPE	
10-1.	.58.3	IRRIGATION SYSTEMS FUNCTIONAL TEST	
	.58.4	PAYMENT	69
10-1.59	WAT	ER DISTRIBUTION SYSTEM FACILITIES	69
10-1.		CONNECTIONS TO EXISTING WATER LINES	
10-1.	.59.2	UTILITY TRENCH BEDDING AND BACKFILL	69
10-1.	.59.3	WATER MAIN LINE	
10-1.	.59.4	GATE VALVE AND BOX	70
10-1.	.59.5	WATER MAIN TEE ASSEMBLY	70
10-1.	.59.6	AIR RELEASE VALVE ASSEMBLY	
10-1.	.59.7	WATER MAIN TAP AND SADDLE	71
10-1.	.59.8	WATER SERVICE LINE	71
10-1.	.59.9	WATER METER ASSEMBLY AND BOX	
10-1.	.59.10	FIRE HYDRANT LINE	71
		WATER MAIN CONNECTION TO EXISTING	
10-1.	.59.12	ABANDON EXISTING WATER LINES	72
10-1.60		JC AMENITIES	
10-1.61		SHING ROADWAY	
10-1.62	NOTI	FICATION AND SCHEDULING	73
10-1.63		ORD DRAWINGS	
10-1.64		IECT EXHIBITS	

# CITY OF GRASS VALLEY ENGINEERING DIVISION

# SPECIAL PROVISIONS

# DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT PROJECT NO. 21-12

#### INSTRUCTIONS TO BIDDERS

# 1. BIDDER'S REPRESENTATIONS

Each bidder by submitting a bid represents that:

- 1.1. The bidder has read and understands the bid package and the bid is in accordance with all of the requirements of the bid package and applicable law.
- 1.2. Neither the bidder nor any subcontractor included on the list of proposed subcontractors submitted with the bid are ineligible to perform work on public works projects pursuant to California Labor Code Sections 1777.1 or 1777.7.
- 1.3. The bidder understands that quantities of unit price items may vary from the estimates provided in the Special Provisions, proposal, technical specifications, and construction contract.
- 1.4. Representatives of the bidder have visited the Project site and have familiarized themselves with the conditions under which the Project work is to be performed to ensure that the Project work may be performed for the amount bid.
- 1.5. The bidder has informed the City in writing no later than five (5) working days prior to the time specified for bid opening of any apparent conflicts, errors, or ambiguities contained in the bid package or between the contents of the bid package and the Project site.

# 2. PRE-BID COMMUNICATION AND INTERPRETATION OF THE BID PACKAGE

- 2.1. Any bidder that discovers any apparent conflicts, errors, or ambiguities contained in the bid package or between the contents of the bid package and the Project site, or that has questions or requires clarification concerning the bid package or its intent must inform the City in writing as soon as reasonably possible, but no later than five (5) working days before the date specified in the bid opening. Such notice shall be sent as specified in the Notice to Contractors for questions concerning the bid package. Questions received less than five (5) working days before the time specified for opening bids may not be answered.
- 2.2. Any interpretation, correction or change of the bid package prior to bid opening will be made by addendum signed by the City Engineer and transmitted to all bid package recipients. No other interpretation or information concerning the bid package issued prior to the date specified for opening bids will be binding. All addenda signed by the City Engineer and issued prior to the time and date specified for opening bids will form a part of the contract documents and must be acknowledged on the bid forms. Any changes, exceptions or conditions concerning the Project and/or the bid package submitted by any bidder as part of a bid may render that bid non-responsive.
- 2.3. The City takes no responsibility for notifying a bidder who does not obtain bid documents from the City or does not provide the specified Request for Revisions statement to the City. Such bidder may be found non-responsive if that bidder fails to acknowledge, as set forth herein, any addenda or does not take into account any additional information provided by the City.
- 2.4. No other interpretation or information concerning the bid package issued prior to the date specified for opening bids will be binding. All addenda signed by the City Engineer and issued prior to the time and date specified for opening bids will form a part of the contract documents and must be acknowledged on the bid forms. Any

changes, exceptions or conditions concerning the Project and/or the bid package submitted by any bidder as part of a bid may render that bid non-responsive.

# 3. PRE-BID ACCESS TO THE SITE

- 3.1. Prior to submitting a bid, it will be the sole responsibility of each bidder to conduct any additional examination, investigation, exploration, test, study or other inquiry and to obtain any additional information pertaining to the physical conditions (including surface, subsurface, and underground utilities) at or near the Project site that may affect the cost, progress, or performance of the Project, and that the bidder deems are necessary to prepare its bid for performance of the Project in accordance with the bid package and contract documents. Bidders seeking any such additional examination or other inquiries or information concerning the Project will do so at the bidder's sole expense.
- 3.2. Bidders seeking to conduct any additional examination or other inquiry at the Project site must request site access from the City at least two (2) working days in advance. The location of any excavation, boring or other invasive testing will be subject to approval on behalf of the City and any other agencies with jurisdiction over such testing. Bidders may not conduct tests at the Project site prior to obtaining City approval. The City may require bidders to execute an access agreement or encroachment permit prior to approving testing at the Project site. Once approved testing is complete, bidders shall fill all trenches or holes, restore all pavements to match the existing structural section, and otherwise clean up and restore the test site to its pre-test condition solely at the bidder's expense.
- 3.3. The Bidder's attention is directed to the requirements of Section 2-1.30, "Job Site and Documentation Examination," of the Standard Specifications and these Special Provisions.

# 4. <u>BIDDING PROCEDURE</u>

- 4.1. Bids shall be delivered to the City of Grass Valley, Engineering Division, 125 East Main Street, Grass Valley, CA 95945, no later than the time and date specified in the Notice to Contractors. Bids will be opened and read publicly at that time. Bids that are submitted late according to the time shown on the official bid clock located in City Hall will be returned unopened. Telephones for use by bidders are not available at the City offices.
- 4.2. In accordance with California Public Contract Code Section 20170, bids must be presented under sealed cover. Bids must be submitted using the proposal forms furnished with the bid package. Bids must include all documents provided in the Proposal. Bids must bear the bidder's legal name and be signed by a representative authorized to bind the bidder. Bids shall be typed or written in ink. Corrections may be made if initialed by the bidder. No oral or telegraphic modifications of bids, including facsimile modifications, will be considered. Bids that are incomplete or that are not presented on the proposal forms furnished with the bid package may be deemed non-responsive.
- 4.3. Each bid must give the full business address of the bidder. Bids of partnerships must furnish the full name of all partners and must be signed in the partnership name by one of the members of the partnership, or by an authorized representative, followed by the printed name and title of the person signing. Bids of corporations must be signed with the legal name of the corporation, followed by the name of the state of incorporation and by the signature and designation of the president, secretary or other person authorized to bind the corporation. The name of each person signing shall also be typed or printed below the signature. Upon request of the City, bidders will furnish satisfactory evidence of the authority of the person signing the bid. Bids of joint ventures must include a certified copy of the legal agreement constituting the joint venture.
- 4.4. No person, firm, corporation, partnership, or legal joint venture may submit more than one bid for the Project. However, a person, firm, corporation, partnership or legal joint venture that has submitted a subcontract proposal to a bidder, or that has quoted prices on materials to a bidder may submit a subcontract proposal, quote prices to other bidders and submit its own bid.
- 4.5. In accordance with California Public Contract Code Section 20171, all bids must include one of the forms of security specified in Caltrans Standard Specifications in an amount of at least ten (10) percent of the total of the bid prices. Bidders that elect to provide bidder's security in the form of a bid bond must execute a bid bond using the form provided in the bid forms. The bidder's security is tendered as a guarantee that the successful bidder, if awarded the Project contract, will execute and submit to the City all required bonds, certificates of insurance, and completed contract forms and enter into a contract with the City within ten (10) working days of receipt of the

Notice of Award. The bidder's security of any successful bidder that fails to do so will be forfeited to the City. All bidders' security not forfeited to the City will be returned once a successful bidder provides all required documents and enters a contract with the City in accordance with all applicable bid package requirements. Forfeiture of the bidder's security to the City will not waive or otherwise limit any other remedy available to the City under applicable law.

- 4.6. In accordance with California Business and Professions Code Section 7028.15, Public Contract Code Section 20103.5, and as specified in the Notice to Contractors, all Project work must be performed by properly licensed contractors and subcontractors with active licenses in good standing as of the date and time specified for bid opening, or, if the Project involves federal funds, no later than the time the Project contract is awarded. Bidders must verify their Contractor's license number and license expiration date on the proposal cover page under penalty of perjury. Bids that do not satisfy applicable licensing requirements will be considered non-responsive and rejected and may subject the bidder to criminal and/or civil penalties. In addition, all licenses shall remain in effect throughout the term of the contract.
- 4.7. Bids may be withdrawn prior to the time set for bid opening by a written request signed by an authorized representative of the bidder filed with the City Engineer. The bid security submitted with bids so withdrawn will be returned to the bidder. Bidders that have withdrawn their bid in accordance with this provision may submit a new bid prior to the time set for bid opening in accordance with all applicable bid package requirements. Bids may not be withdrawn during the ninety-day period after the time set for bid opening except as permitted by law pursuant to California Public Contract Code Section 5100 and following. Any other bid withdrawal will result in forfeiture of the bidder's bid security to the City.
- 4.8. In submitting a bid to a public purchasing body, the bidder offers and agrees that if the bid is accepted, it will assign to the purchasing body all rights, title and interest in and to all causes of action it may have under Section 4 of the Clayton Act (15 U.S.C. Sec. 15) or under the Cartwright Act (Chapter 2 [commencing with Section 16700] of Part 2 of Division 7 of the Business and Professional Code), arising from purchases of goods, services or materials pursuant to the public works contract or the subcontract. This assignment shall be made and become effective at the time the awarding body tenders final payment to the contractor, without further acknowledgment to the parties.

# 5. BID PROTESTS

Any protest of the proposed Project award must be submitted in writing to the City no later than 5:00 PM on the third business day following the date of the bid opening.

- 5.1. The initial protest must contain a complete statement of the basis for the protest.
- 5.2. The protest must state the facts and refer to the specific portion of the document or the specific statute that forms the basis for the protest. The protest must include the name, address, and telephone number of the person representing the protesting party.
- 5.3. The party filing the protest must concurrently transmit a copy of the initial protest to the apparent low bidder.
- 5.4. The party filing the protest must have actually submitted a bid for the Project. A subcontractor of a party filing a bid for the Project may not submit a bid protest. A party may not rely on the bid protest submitted by another bidder, but must timely pursue its own protest.
- 5.5. The procedure and time limits set forth in these Instructions to Bidders are mandatory and are the bidders' sole and exclusive remedy in the event of a bid protest. Any bidder's failure to fully comply with these procedures shall constitute a waiver of any right to further pursue a bid protest, including filing of a challenge of the award pursuant to the California Public Contract Code, filing of a claim pursuant to the California Government Code, or filing of any other legal proceedings.
- 5.6. The City shall review all timely protests prior to award of the Project. The City shall not be required to hold an administrative hearing to consider any protests, but may do so at its option. At the time of the City Council's consideration of the Project award, the City Council shall also consider the merits of any timely protests. The City Council may either reject the protest and award to the lowest responsible bidder or accept the protest and award

the bid to the next lowest responsible bidder. Nothing in this section shall be construed as a waiver of the City Council's right to reject all bids.

# 6. AWARD

- 6.1. The bidder's attention is directed to the provisions in Section 3, "Contract Award and Execution", and Section 4, "Beginning of Work, Time of Completion and Liquidated Damages," of these Special Provisions.
- 6.2. In accordance with applicable law, the City reserves the right to reject any or all bids and to waive any informality in any bid. The City reserves the right to accept any portion of any bid, unless the bid package expressly provides that the award will be made as a whole. If the City elects to award a contract for performance of the Project, the contract will be awarded in accordance with California Public Contract Code Section 20162 and other applicable law to the responsible bidder submitting a responsive bid with the lowest total bid price for the base bid and those additive or deductive alternate items listed in the Proposal. In accordance with the contract documents and other applicable law, the City may add or deduct items of work from the Project after the lowest responsible bidder is determined.
- 6.3. The contract shall be awarded, if an award is made, to the lowest responsible bidder within 90 calendar days from the date bids are publicly opened and declared. If the award is not made within that period, all bids submitted are deemed rejected by the governing body.

A contract shall exist between the Contractor and the City when all of the following steps have been completed.

- (a) Award of the contract by the governing body.
- (b) Execution of a written contract by the Contractor within ten (10) working days of receipt of written notice of award.
- (c) Delivery by the Contractor to the City, the Faithful Performance and Labor and Materials bonds required herein, within ten (10) working days of receipt of written notice of award.
- (d) Delivery by the Contractor to the City, all City-approved Insurance Policies, on the appropriate forms, as required, within ten (10) working days of receipt of written notice of award.

Contractor shall execute a written agreement with the City using the form set forth hereafter.

- 6.4. The successful bidder and any subcontractors and others engaged in performance of the Project shall have valid local business licenses, as applicable, before commencing work on the Project.
- 6.5. Upon verifying that the successful bidder has provided complete, executed copies of all documents specified necessary to execute the contract and an authorized City representative has signed the contract, the Engineering Division will issue a Notice to Proceed in accordance with Section 4, "Beginning of Work, Time of Completion and Liquidated Damages," of these Special Provisions. The number of days within which the Project must be complete begins to run on the project commencement date.

# 7. <u>PRICING</u>

- 7.1. Inconsistency of bid unit items, item prices, and/or totals shall be resolved in accordance with the requirements specified in the Proposal.
- 7.2. Any federal, state, or local tax payable on articles to be furnished for the Project shall be included in the lump sum total bid price and paid by the Contractor under the contract.

# 8. QUANTITIES

8.1. Quantities, including but not limited to, material or labor quantities, that are provided in the bid package concerning the Project are estimates only and are provided solely as a general indication of the Project scope. The City does not warrant that such quantity estimates provided in the bid package represent the actual quantities required to perform the Project in accordance with the contract documents. Such quantity estimates do not bind the

City and bidders should not rely on them in preparing their bids. Each bidder is solely responsible for determining the quantities on which to base their bids in light of information contained in the bid package, bidder investigation and analysis of the Project and the Project site, and any other analysis or expertise of the bidder concerning the Project.

8.2. The City may amend, decrease or increase the Project work in accordance with the bidding package and the contract documents. If the City amends, decreases or increases the Project work prior to award of the Project, each bidder will be solely responsible for determining the revised quantities, if any, on which to base their bid in light of information contained in the bid package and any amendments or addenda to the bid package, bidder investigation and analysis of the Project as amended, decreased or increased, the Project site, and any other analysis or expertise of the bidder concerning the Project.

# 9. SUBST<u>ITUTION OF "OR EQUAL" ITEMS</u>

9.1. In accordance with California Public Contract Code Section 3400 concerning the submittal of an "or Equal" product, bidder's attention is directed to the requirements of Section 2-1.02, "Required Listing of Proposed Products "or Equals" with Bid Proposal" of these Special Provisions, and the Proposal.

#### 10. SUBCONTRACTING

- 10.1. Bids must be in accordance with the requirements of the Subletting and Subcontracting Fair Practices Act, California Public Contract Code Section 4100 and the following. Bids must include a completed list of proposed subcontractors on the form included in the bid package. In accordance with California Public Contract Code Section 4104, completed lists of proposed subcontractors must include the name, business location, the portion (type or trade), and dollar amount of the Project work to be subcontracted for each subcontractor that will perform a portion of the Project work (including special fabrication and installation of a portion of the work) valued in excess of one half on one percent of the total Project bid price. If the Project work includes construction of streets or highways, the completed list of proposed subcontractors must include the subcontractor name, business location, type of work and dollar amount to be subcontracted for each subcontractor that will perform a portion of the Project work (including special fabrications and installation of a portion of the work) valued in excess of one half of one percent of the total Project bid price, or ten thousand dollars (\$10,000), whichever is greater.
- 10.2. In accordance with California Public Contract Code Section 4106, for any portion of the Project work with a value of more than one half of one percent of the total Project bid price for which no subcontractor is listed, or for which more than one subcontractor is listed, bidders certify by submitting their bids that they are qualified to perform that portion of the Project work and that they will perform that portion of the Project work with their own forces. Bidders may not substitute another subcontractor for a subcontractor listed in their bid except as permitted by the City in accordance with Section 4107 and following of the California Public Contract Code.
- 10.3. Bidder's attention is directed to the requirements specified in "Subcontracting," of these Special Provisions and the Proposal.

# 11. ASSIGNMENT

- 11.1. Bidders may not assign, sublet, sell, transfer, or otherwise dispose of their bid or any right, title or interest in their bid, or their obligations under their bid, without the written consent of the City Engineer. Any purported assignment, subletting, sale, transfer or other disposition of a bid or any interest in a bid, or of any obligations under a bid without such written consent will be void and of no effect.
- 11.2. Bidder's attention is directed to the requirements specified in Section 5-1.12, "Assignment," of the Construction Specifications.

# 12. BONDS

12.1. The successful bidder shall submit to the City a performance bond within ten (10) working days of receiving written notice of award. The successful bidder shall submit to the City a payment or labor and materials bond within ten (10) working days of receiving written notice of award. City shall retain the Performance Bond for a one-year guarantee period from the date of the City's acceptance of the work. All Project bonds shall be executed using the forms provided in the bid package.

- 12.2. The bonds shall be obtained from a California admitted surety that is licensed by the State of California to act as a surety upon bonds and undertakings and which maintains in this State at least one office for the conduct of its business. The surety shall furnish reports as to its financial condition from time to time upon request by City.
- 12.1. In accordance with California Civil Code Section 9550, labor and materials bond must be in the amount of one hundred percent of the total amount payable by the terms of the Project contract and guarantee payment to persons listed in California Civil Code Section 9100 for work performed and for charges for materials, supplies, and equipment provided under the Project contract (including amounts due under or subject to the Unemployment Insurance Code) in accordance with the requirements of California Civil Code Section 9554.
- 12.2. The performance bond must be in the amount of one hundred percent of the amount payable by the terms of the Project contract to guarantee the faithful performance of the Project work.
- 12.3. Bidder's attention is directed to the requirements specified in Section 3-1.05, "Contract Bonds," and "Warranty," of these Special Provisions, and the Contract.

#### 13. LABOR LAWS

- 13.1. Bidders must comply with applicable provisions of the California Labor Code.
- 13.2. In accordance with California Labor Code Section 1771, not less than the general prevailing rate of per diem wages for work of a similar character in the locality in which the Project is to be performed, and not less than the general prevailing rate of per diem wages for holiday and overtime work fixed as provided in the California Labor Code shall be paid to all workers engaged in performing the Project.
- 13.3. In accordance with California Labor Code Section 1770 and following, the Director of Industrial Relations has determined the general prevailing wage per diem rates for work in the locality in which the Project is to be performed. In accordance with California Labor Code Section 1773, the City has obtained the general prevailing rate of per diem wages and the general rate for holiday and overtime work in the locality in which the Project is to be performed for each craft, classification or type of worker needed to perform the Project. In accordance with California Labor Code Section 1773.2, copies of the prevailing rate of per diem wages for Nevada County are on file at the City offices, 125 E. Main Street, Grass Valley, California 95945. These wage rates are not included in the Special Provisions but will be made available on request.
- 13.4. In accordance with California Labor Code Section 1777.1, contractors and subcontractors that are found guilty of willfully violating Chapter 1 of Part 7 of Division 2 of the Labor Code (except for Section 1777.5), or that are found guilty of such violations with intent to defraud, and entities in which such contractors or subcontractors have any interest, may be ineligible to bid on, be awarded, or perform Project work as a subcontractor.
- 13.5. A contractor or subcontractor shall not be qualified to bid on, be listed in a bid proposal, subject to the requirements of Section 4104 of the Public Contract Code, or engage in the performance of any contract for public work, as defined in this chapter, unless currently registered and qualified to perform public work pursuant to Section 1725.5. It is not a violation of this section for an unregistered contractor to submit a bid that is authorized by Section 7029.1 of the Business and Professions Code or by Section 10164 or 20103.5 of the Public Contract Code, provided the contractor is registered to perform public work pursuant to Section 1725.5 at the time the contract is awarded.
- 13.6. Bidder's attention is directed to the requirements specified in "Prevailing Wage, "Labor Nondiscrimination," and "Labor Code Requirements," of these Special Provisions, and Section 7-1.02K, "Labor Code", of the Standard Specifications.

#### SECTION 1 GENERAL SPECIFICATIONS AND PLANS

#### 1-1.01 **GENERAL**

The work embraced herein shall be done in accordance with the Project Plans, Standard Specifications and Standard Plans dated 2018 of the Department of Transportation, and the City of Grass Valley's Improvement Standards and in accordance with the following Special Provisions.

Amendments to the Department of Transportation's Standard Specifications set forth in these Special Provisions shall be considered as part of the Standard Specifications for the purposes set forth in Section 5-1.02, "Contract Components" of the Standard Specifications and are included as Attachment A to these Special Provisions. Whenever either the term "Standard Specification is amended" or the term "Standard Specifications are amended" is used in the Special Provisions, the text following said term shall be considered an amendment to the Standard Specifications. In case of conflict between such amendments and the Standard Specifications, the amendments shall take precedence over and be used in lieu of the conflicting portions.

In case of conflict between the City of Grass Valley's Improvement Standards, and these Special Provisions, the Special Provisions shall govern, take precedence over, and be used in lieu of such conflicting portions. The Department of Transportation's Standard Specifications and Standard Plans shall govern over the City of Grass Valley's Improvement Standards.

Units in the United States Standard Measures shall apply to this contract.

#### 1-1.02 REVISED STANDARD SPECIFICATIONS AND STANDARD PLANS

All references to the Department of Transportation's Standard Specifications and Standard Plans shall be considered to include any revisions issued by the Office of Construction Contract Standards in effect at the time of printing of these Special Provisions.

Revised Standard Specifications and Standard Plans can be found on the Caltrans website as provided in the following link: <a href="http://www.dot.ca.gov/des/oe/construction-contract-standards.html">http://www.dot.ca.gov/des/oe/construction-contract-standards.html</a>.

#### 1-1.03 DEFINITIONS AND TERMS

As used herein, unless the context otherwise requires, the following terms have the following meaning:

City: City of Grass Valley.

City Engineer: The City Engineer of the City of Grass Valley, State of California.

City Hall: The City building located at 125 East Main Street, Grass Valley, California, 95945.

Contract Documents: All of the written matter describing the contemplated work, including the Plans, Special Provisions, Improvement Standards, Bonds, Agreement, and any approved Change Orders.

**Department:** The Engineering Department of the City of Grass Valley, State of California, except when referring to documents, laws or departments of the State of California. Any reference in question shall be as designated by the Engineer.

**Department of Transportation:** The Engineering Division of the City of Grass Valley, State of California, except when referring to documents, laws or departments of the State of California. Any reference in questions shall be as designated by the Engineer.

Director of Transportation: The City Engineer of the City of Grass Valley, State of California.

District Director of the District: The City Engineer of the City of Grass Valley, State of California.

**Engineer:** The City Engineer of the City of Grass Valley, State of California, acting either directly or through properly authorized agents, such agents acting within the scope of the particular duties entrusted to them.

**Improvement Standards:** The Design Standards, Construction Standards and Standard Details of the City of Grass Valley Public Works Department, Engineering Division

Laboratory: The established laboratory of the Materials and Research Department of the Department of Transportation of the State of California or laboratories authorized by the Engineer to test materials and work involved in the Contract, except

when referring to documents, laws or departments of the State of California. Any reference in question shall be as designated by the Engineer

**Standard Plans:** The 2018 edition of the Standard Plans of the State of California, Department of Transportation including any revisions to the Standard Plans issued by the Office of Construction Contract Standards in effect at the time of printing of these Special Provisions. Any reference therein to the State of California or a State agency, office, or officer shall be interpreted to refer to the City or it's corresponding agency, office, or officer acting under this contract.

**Standard Specifications:** The 2018 edition of the Standard Specifications of the State of California, Department of Transportation including any revisions to the Standard Specifications issued by the Office of Construction Contract Standards in effect at the time of printing of these Special Provisions. Any reference therein to the State of California or a State agency, office, or officer shall be interpreted to refer to the City or its corresponding agency, office, or officer acting under this contract.

**State:** The City of Grass Valley, except when referring to documents, laws or departments of the State of California. Any reference in question shall be as designated by the Engineer.

**State Highway Engineer:** The City Engineer of the City of Grass Valley, State of California, acting either directly or through properly authorized agents, such agents acting within the scope of the particular duties entrusted to them.

**Transportation Building, Sacramento:** City Hall of the City of Grass Valley, State of California except when referring to documents, laws or departments of the State of California. Any reference in question shall be as designated by the Engineer.

Working Day: Monday through Friday, except holidays, from 7am to 7pm, or as further specified in these Special Provisions.

Contractor's attention is directed to the definitions and terms specified in Section 1, "Purpose and Definitions," of the Design Standards and Section 1, "Purpose and Definitions," of the Construction Standards.

## **SECTION 2 BIDDING**

## **2-1.01 GENERAL**

The bidder's attention is directed to the provisions in Section 2, "Bidding," of the Standard Specifications and these Special Provisions for the requirements and conditions which the bidder must observe in the preparation of the proposal form and the submission of the bid.

Each proposal shall include unit costs, and total costs for the base bid.

Bidders are required to specify a physical business street address to receive certified mail in accordance with the Proposal. The City shall be notified in writing a minimum of thirty (30) days in advance of any changes of address.

Section 2-1.06A, "General," of the Standard Specifications is replaced in its entirety with the following:

Improvement Standards may be viewed at the City of Grass Valley's website: http://www.cityofgrassvalley.com/services/departments/engineering/Standard Specifications and Drawings

The Request for Qualifications/Request for Proposals, including the Special Provisions, Design Build Contract, Price Proposal and Bidder's Certificates may be viewed at the City of Grass Valley website, <a href="http://www.cityofgrassvalley.com/services/departments/engineering/rfpsrfqs-and-current-bids">http://www.cityofgrassvalley.com/services/departments/engineering/rfpsrfqs-and-current-bids</a>, or at City Hall at 125 East Main Street, Grass Valley, CA 95945. The Proposal form is bound separate from the Contract and the Special Provisions.

In addition to the subcontractors required to be listed in conformance with, "Subcontractor List," of these Special Provision, each proposal shall have listed therein the portion of work that will be done by each subcontractor listed. The listing subcontractor shall also set forth the portion of work that will be done by each subcontractor listed. A sheet for listing the subcontractors is included in the Proposal.

A contractor or subcontractor shall not be qualified to bid on, be listed in a bid proposal, subject to the requirements of Section 4104 of the Public Contract Code, or engage in the performance of any contract for public work, as defined in this chapter, unless currently registered and qualified to perform public work pursuant to Labor Code Section 1725.5. It is not a violation of this section for an unregistered contractor to submit a bid that is authorized by Section 7029.1 of the Business and Professions Code or by Section 10164 or 20103.5 of the Public Contract Code, provided the contractor is registered to perform public work pursuant to Section 1725.5 at the time the contract is awarded.

In conformance with Public Contract Code Section 7106, a Noncollusion Affidavit is included in the Proposal. Signing the Proposal shall also constitute signature of the Noncollusion Affidavit.

The contractor, sub recipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26 in the award and administration of Department of Transportation assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate. Each subcontract signed by the bidder must include this assurance.

Failure of the bidder to fulfill the requirements of the Special Provisions for submittals required to be furnished after bid opening, including but not limited to escrowed bid documents, where applicable, may subject the bidder to a determination of the bidder's responsibility in the event it is the apparent low bidder on any future public works contracts.

#### 2-1.02 REQUIRED LISTING OF PROPOSED PRODUCTS "OR EQUALS"

On the sheet provided herein, to be submitted as part of the proposal, the bidder shall list each proposed substitution of an "equal" product. The bidder shall identify the proposed substitution by the section of the specifications that specifies the product, the name of the product proposed to be substituted out, and the name and manufacturer of the product proposed to be substituted. Prior to the award of the Contract and upon the request of the Engineer, the bidder shall submit the written request for substitution within three (3) days. The request shall be accompanied by evidence satisfactory to the Engineer that the materials and products proposed for use are equal to or better than the materials and products specified or detailed on the plans. The burden of proof as to the quality and suitability of substitutions shall be upon the bidder. Failure to submit the information as requested by the Engineer shall be deemed a voluntary withdrawal of the proposed substitution.

No requests for any substitution shall be allowed unless listed on the sheet provided. No requests for substitution shall be allowed after the opening of the bid. Requests for substitution shall be reviewed and considered by the Engineer promptly after the award of the contract to the lowest responsible Bidder. In its sole discretion, the Engineer may request additional information about the proposed substitution.

The decision by the Engineer as to whether a proposed substitution is an "Equal" product shall be made by the Engineer based upon the information submitted and will be final.

The Engineer will be the sole judge as to whether a proposed substitution is an "Equal" product. The Engineer's decision will be made based upon the information submitted and will be final.

A sheet for listing the proposed substitutions of an "Equal" product, as required herein, is included in the Proposal.

## 2-1.03 SUBCONTRACTOR LIST

Contractor's attention is directed to the requirements of "Subcontractor List" of the Standard Specifications, the Proposal, and these Special Provisions.

In addition to the Subcontractors required to be listed, each proposal shall have listed herein the **name and address**, and **license designation number** of each Subcontractor to whom the bidders proposes to directly subcontract portions of the work. The list of Subcontractors shall also set forth the portion of work that will be done by each Subcontractor listed.

A sheet for listing the subcontractors, as required herein, is included in the Proposal.

#### 2-1.04 BIDDER'S SECURITY

The form of Bidder's Bond mentioned in "Bidder's Security," of the Standard Specifications will be found following the signature page of the Proposal annexed hereto.

# 2-1.05 NON-COLLUSION AFFIDAVIT

In accordance with Public Contract Code 7106, a Non-Collusion Affidavit is included in the proposal.

# 2-1.06 DISADVANTAGE BUSINESS ENTERPRISES (DBE)

The City maintains a goal that Disadvantaged Business Enterprises (DBEs), as defined in Part 26, Title 49 CFR, shall be encouraged to participate in the performance of City contracts. The Contractor should ensure that DBEs, as defined in Part 26, Title 49 CFR, have the opportunity to participate in the performance of this contract and shall take all necessary and reasonable steps, as set forth in Part 26, Title 49 CFR, for this assurance. The Contractor shall not discriminate on the basis of race, color, national origin, or gender in the award and performance of subcontracts. Failure to carry out the requirements of this paragraph shall constitute a breach of contract and may result in termination of this contract or other remedy the City may deem appropriate.

Bidders shall be fully informed respecting the requirements of the Code of Federal Regulations and are urged to obtain DBE participation in this project.

Caltrans has engaged the services of a contractor to provide supportive services to contractors and subcontractors to assist in obtaining DBE participation on federally funded construction projects. Bidders and potential subcontractors should check the Caltrans website at http://www.dot.ca.gov/hq/bep to verify the current availability of this service.

#### SECTION 3 CONTRACT AWARD AND EXECUTION

#### **3-1.01 GENERAL**

The bidder's attention is directed to the provisions in Section 3, "Contract Award and Execution," of the Standard Specifications, "Award," of the Instruction To Bidders of these Special Provisions, and these Special Provisions for the requirements and conditions concerning submittal of DBE information, award, and execution of contract.

Bid protests are to be delivered to the following address: Engineering Division, 125 East Main Street, Grass Valley, CA 95945.

The award of the contract, if it be awarded, will be to the lowest responsible bidder whose bid complies with all the requirements prescribed.

No contractor or subcontractor may be awarded a contract for public work on a public works project (awarded on or after April 1, 2015) unless registered with the Department of Industrial Relations pursuant to Labor Code section 1725.5. This project is subject to compliance monitoring and enforcement by the Department of Industrial Relations.

The contract shall be executed by the successful bidder and shall be returned together with the contract bonds, to the Agency so that it is received within 10 days, not including Saturdays, Sundays and legal holidays, after the bidder has received the contract for execution. Failure to do so shall be just cause for forfeiture of the proposal guaranty. The executed contract documents shall be delivered to the following address: **Engineering Division**, 125 East Main Street, Grass Valley, CA 95945.

# 3-1.02 AWARD OF CONTRACT

The City of Grass Valley reserves the right to reject any and all bids or to waive any minor defects or irregularity in bidding in accordance with applicable law. In accordance with California Public Contract Code Section 20103.8, if the City elects to award a contract for performance of the project, the contract will be awarded in accordance with California Public Contract Code Section 20162 and other applicable law to the responsible bidder submitting a responsive bid with the lowest total bid price for the base bid without consideration of the bid price for any additive or deductive items. All bids will remain valid for 90 days after the bid opening. Except as permitted by law and subject to all applicable remedies, including forfeiture of bidder's security, bidders may not withdraw their bid during the 90 day period after the bid opening.

# 3-1.03 CONTRACT BONDS

Contractor shall provide, at the time of the execution of the agreement or contract for work, and at his own expense, a surety bond ("Performance Bond") in an amount equal to at least 100 percent (100%) of the contract price as security for the faithful performance of said agreement within the time prescribed, in a manner satisfactory to the Engineer, and that all materials and workmanship will be free from original or developed defects. This Performance Bond must remain in effect until the end of all warranty periods set forth in the Special Provisions. Contractor shall also provide, at the time of the execution of the agreement or contract for the work, and at his own expense, a separate surety bond ("Payment Bond") in an amount equal to at least 100 percent (100%) of the contract price as security for the payment of all persons performing labor and furnishing materials in connection with said agreement. This Payment Bond shall be maintained by the Contractor in full force and effect until the work is accepted by the City and until all claims for materials and labor are paid, and shall otherwise comply with Civil Code. Sureties on each of said bonds shall be satisfactory to the City Attorney.

Should any bond become insufficient, the Contractor shall renew the bond within ten (10) working days after receiving notice from the Engineer.

Should any Surety at any time be unsatisfactory to the City, notice will be given the Contractor to that effect. No further payments shall be deemed due or will be made under said agreement until a new Surety shall qualify and be accepted by the City.

Changes in said agreement of extensions of time, made pursuant to the agreement, shall in no way release the Contractor or Surety from its obligations. Notice of such changes or extensions shall be waived by the Surety.

# SECTION 4 BEGINNING OF WORK, TIME OF COMPLETION, AND LIQUIDATED DAMAGES

# **4-1.01 GENERAL**

Attention is directed to the provisions in Section 8-1.04, "Start of Job Site Activities," Section 8-1.05, "Time," and Section 8-1.10, "Liquidated Damages," of the Standard Specifications, and "General Requirements," of these Special Provisions.

The Contractor shall begin work by the date identified in writing in the Notice to Proceed by the City of Grass Valley and shall diligently prosecute the same before the expiration of

120 Working Days

Beginning on the first day of work or the date stated in the Notice to Proceed, whichever comes first.

Due to the project site being critical segments of roadway and due to seasonal constraints, time is of the essence to complete the contract work.

The Contractor shall pay to City of Grass Valley the sum of \$500 per day, as liquidated damages, for each and every calendar day delay in finishing the work in excess of the working days prescribed above. At the Engineer's option, said sum may be deducted from any payment due to or to become due the Contractor.

The 72 hours advance notice before beginning work specified in Section 8-1.04, "Start of Job Site Activities," of the Standard Specifications is changed to 5 days advance notice for this project.

## 4-1.02 HOLIDAYS

Designated legal holidays are: January 1st, the third Monday in January, the third Monday in February, the last Monday in May, July 4th, the first Monday in September, November 11th, Thanksgiving Day, the day after Thanksgiving Day, December 24th, and December 25th. When a designated legal holiday falls on a Sunday, the following Monday shall be a designated legal holiday. When a designated legal holiday falls on a Saturday, the preceding Friday shall be a designated legal holiday.

#### 4-1.03 WINTERIZATION

The Contractor shall, at his sole expense, winterize the project if construction activities are not completed by October 15. The Contractor shall winterize the project in conformance with the requirements of "Water Pollution Control," of these Special Provisions for all construction activities that take place between October 15<sup>th</sup> and May 1<sup>st</sup>. An acceptable winterization plan shall be submitted to the Engineer no later than October 1st for his review and acceptance.

The Contractor's winterization plan is required for all construction activities that take place between October 15<sup>th</sup> and May 1<sup>st</sup> and shall be in conformance with the requirements of "Water Pollution Control," of these Special Provisions.

The intent of winterization is as follows:

- 1. To assure that erosion of earthen materials is prevented to greatest extent practicable.
- 2. To assure that storm waters are allowed to pass through the site without substantial damage to the project site.

After the acceptance of a winterization plan and the installation of all required temporary winterization measures, work may proceed after October 15th, if approval is obtained in writing from the California Regional Water Quality Control Board and the Engineer. All work done after October 15th must be able to be winterized within 24 hour notice.

**Winter Suspension**: The City may, at its option, suspend work between October 15th and May 1st of the following year. If this occurs, the entire site shall be winterized including areas not yet seeded or planted.

Full compensation for conforming to the provisions of this section, not otherwise provided for in other sections of these Special Provisions, shall be considered as included in the prices paid for the various Contract items of work involved and no additional compensation will be allowed.

#### 4-1.04 PRE-CONSTRUCTION CONFERENCE

A pre-construction conference will be held at the office of the City Engineer for the purpose of discussing with the Contractor the scope of work, contract drawings, specifications, existing conditions, materials to be ordered, equipment to be used, and all essential matters pertaining to the prosecution and the satisfactory completion of the project as required. The Contractor's representative at this conference shall include all major superintendents for the work and may include major subcontractors. A "Key Personnel and Emergency Phone Numbers" list (for which these key personnel could be contacted 24 hours per day, 7 days a week) shall be submitted to the City. Attendance by the Contractor or the Contractor's authorized representative is mandatory.

Full compensation for conforming to the provisions of this section, not otherwise provided for in other sections of these Special Provisions, shall be considered as included in the prices paid for the various Contract items of work involved and no additional compensation will be allowed.

# 4-1.05 ARCHAEOLOGICAL FINDS

All articles of archaeological interest, which may be uncovered by the Contractor during the progress of the work, shall be reported immediately to the Engineer. The further operations of the Contractor, with respect to the find will be decided under the direction of the Engineer.

#### 4-1.06 EXTRA WORK

Section 4-1.05, "Changes and Extra Work," of the Standard Specifications is amended by adding the following between the second and third paragraphs:

If in the opinion of the Engineer, such work cannot reasonably be performed concurrently with other items of work, and if a controlling item of work is delayed thereby, an adjustment of contract time will be made.

# 4-1.07 SCOPE OF WORK

Shall conform to the provisions of Section 4, "Scope of Work," of the Standard Specifications and these Special Provisions.

#### 4-1.08 ELIMINATION OF ITEMS OF WORK

The Contractor's attention is directed to Section 4-1.05, "Changes and Extra Work," of the Standard Specifications concerning the elimination of items of work, and these Special Provisions.

#### SECTION 5 GENERAL

#### SECTION 5-1 MISCELLANEOUS

# THE CONTRACTOR AND ALL SUBCONTRACTORS SHALL COMPLY WITH CALIFORNIA LABOR CODE SECTIONS 1774 AND 1775, AND RELATED CODES.

#### 5-1.01 LABOR NONDISCRIMINATION

Attention is directed to the following Notice that is required by Chapter 5 of Division 4 of Title 2, California Code of Regulations.

# NOTICE OF REQUIREMENT FOR NONDISCRIMINATION PROGRAM (GOV. CODE, SECTION 12990)

Your attention is called to the "Nondiscrimination Clause", set forth in Section 7-1.02I(2), "Nondiscrimination," of the Standard Specifications, which is applicable to all nonexempt State contracts and subcontracts, and to the "Standard California Nondiscrimination Construction Contract Specifications" set forth therein. The specifications are applicable to all nonexempt State construction contracts and subcontracts of \$5,000 or more.

## 5-1.02 LABOR CODE REQUIREMENTS

For all new projects awarded on or after April 1, 2015, the contractors and subcontractors must furnish electronic certified payroll records to the Labor Commissioner. After January 1, 2015, the requirement to furnish electronic certified payroll records to the Labor Commissioner will apply to all public works projects, whether new or ongoing.

Attention is directed to the provisions in Section 7-1.02K(5), "Working Hours" and Section 7-1.02K(3), "Certified Payroll Records" of the Standard Specifications.

#### 5-1.03 PREVAILING WAGE

Attention is directed to the provisions in Section 7-1.02K(2), "Wages" of the Standard Specifications.

The general prevailing wage rates and any applicable changes to these wage rates determined by the Director of Industrial Relations for Nevada County, may be examined at the City of Grass Valley Engineering Division Office and are available from the California Department of Industrial Relations' Internet web site at <a href="http://www.dir.ca.gov/DLSR/PWD">http://www.dir.ca.gov/DLSR/PWD</a>. These wage rates are not included in the Proposal and Construction Contract for the project. Changes, if any, to the general prevailing wage rates will be available at the same location.

The general prevailing wage rates and any applicable changes to these wage rates determined by the United States Department of Labor, Branch of Construction Wage Determinations, for Nevada County, are available at the City of Grass Valley Engineering Division Office located at 125 East Main Street, Grass Valley, CA 95945 [telephone (530) 274-4373]. Changes, if any, to the general prevailing wage rates will be available at the same location. General prevailing wage rates area also available on the California Department of Transportation website: http://www.dot.ca.gov/hq/esc/oe/federal-wages/.

The Contractor and any subcontractor shall pay each worker that is employed for any public work done under contract, not less than the higher of the prevailing wage rates as determined by the California Director of Industrial Relations and the United States Department of Labor, Branch of Construction Wage Determinations.

#### 5-1.04 SUBCONTRACTING

Attention is directed to the provisions in Section 5-1.13, "Subcontracting," of the Standard Specifications and these Special Provisions.

All subcontractors doing work shall possess an appropriate valid California Contractor's License for the type of work the subcontractor will perform at the time of the bid submittal and the license shall remain in effect throughout the duration of employment on the job.

All applicable license designations and numbers for Subcontractors doing work in excess of \$1,000.00 shall be included on the LIST OF SUBCONTRACTORS within the Proposal.

No subcontract releases the Contractor from the contract or relieves the Contractor of their responsibility for a subcontractor's work.

If the Contractor violates Pub Cont Code § 4100 et seq., the City of Grass Valley may exercise the remedies provided under Pub Cont Code § 4110. The City of Grass Valley may refer the violation to the Contractors State License Board as provided under Pub Cont Code § 4111.

The Contractor shall perform work equaling at least 30 percent of the value of the original total bid with the Contractor's own employees and equipment, owned or rented, with or without operators.

Each subcontract must comply with the contract.

Submit copies of subcontracts upon request by the Engineer.

Before subcontracted work starts, submit a Subcontracting Request form.

Pursuant to the provisions in Section 1777.1 of the Labor Code, the Labor Commissioner publishes and distributes a list of contractors ineligible to perform work as a subcontractor on a public works project. This list of debarred contractors is available from the Department of Industrial Relations web site at: <a href="http://www.dir.ca.gov/DLSE/Debar.html">http://www.dir.ca.gov/DLSE/Debar.html</a>

Upon request by the Engineer, immediately remove and not again use a subcontractor who fails to prosecute the work satisfactorily.

#### 5-1.05 PROMPT PROGRESS PAYMENT TO SUBCONTRACTORS

Attention is directed to the provisions in Sections 10262 and 10262.5 of the Public Contract Code concerning prompt payment to subcontractors. A prime contractor or subcontractor shall pay any subcontractor not later than 10 days of receipt of each progress payment in accordance with the provision in Section 7108.5 of the California Business and Professions Code concerning prompt payment to subcontractors. The 10 days is applicable unless a longer period is agreed to in writing. Any delay or postponement of payment over 30 days may take place only for good cause and with the agency's prior written approval. Any violation of Section 7108.5 shall subject the violating contractor or subcontractor to the penalties, sanctions and other remedies of that section. This requirement shall not be construed to limit or impair any contractual, administrative, or judicial remedies otherwise available to the contractor or subcontractor in the event of a dispute involving late payment or nonpayment by the prime contractor, deficient subcontract performance, or noncompliance by a subcontractor.

#### 5-1.06 PROMPT PAYMENT OF WITHHELD FUNDS TO SUBCONTRACTORS

No retainage will be held by the agency from progress payments due the prime contractor. Any retainage kept by the prime contractor or by a subcontractor must be paid in full to the earning subcontractor in 30 days after the subcontractor's work is satisfactorily completed. Any delay or postponement of payment may take place only for good cause and with the agency's prior written approval. Any violation of these provisions shall subject the violating contractor or subcontractor to the penalties, sanctions, and remedies specified in Section 7108.5 of the California Business and Professions Code. This requirement shall not be construed to limit or impair any contractual, administrative, or judicial remedies, otherwise available to the contractor or subcontractor in the event of a dispute involving late payment or nonpayment by the contractor, deficient subcontractor performance.

# 5-1.07 PAYMENTS

Attention is directed to Sections 9-1.16, "Progress Payments," and 9-1.17, "Payment After Contract Acceptance," of the Standard Specifications and these Special Provisions.

#### 5-1.08 INTEREST ON PAYMENTS

Interest shall be payable on progress payments, payments after acceptance, final payments, extra work payments, and claim payments shall be in accordance with Section 9-1.03, "Payment Scope," of the Standard Specifications, the Standard Specifications, and these Special Provisions.

The rate of interest payable on any award in arbitration shall be 6 percent per annum if allowed under the provisions of Civil Code Section 3289.

#### 5-1.09 WITHHOLDS

Payment of withheld funds shall conform to Section 9-1.16E, "Withholds," of the Standard Specifications and these Special Provisions.

Funds withheld from progress payments to ensure performance of the contract that are eligible for payment into escrow or to an escrow agent pursuant to Section 10263 of the California Public Contract Code do not include funds withheld or deducted from payment due to failure of the Contractor to fulfill a contract requirement.

# 5-1.10 PLANS AND WORKING DRAWINGS

When the specifications require working drawings to be submitted to the Division of Structure Design, the drawings shall be submitted to the Engineer, unless otherwise specifically noted.

# 5-1.11 EXAMINATION OF PLANS, SPECIFICATIONS, CONTRACT, AND SITE OF WORK

The third through seventh paragraph of Section 2-1.06B, "Supplemental Project Information," of the Standard Specifications is amended to read:

Where the Department has made investigations of site conditions, including subsurface conditions in areas where work is to be performed under the contract, or in other areas, some of which may constitute possible local material sources, bidders or Contractors may, upon written request, inspect the records of the Department as to those investigations subject to and upon the conditions hereinafter set forth.

Attention is directed to "Differing Site Conditions" of these Special Provisions regarding physical conditions at the site which may differ from those indicated in the Contract Documents.

# 5-1.12 DIFFERING SITE CONDITIONS

Attention is directed to Section 4-1.06, "Differing Site Conditions," of the Standard Specifications.

During the progress of the work, if subsurface or latent conditions are encountered at the site differing materially from those indicated in the Contract Documents, or an examination of the conditions above ground at the site, the party discovering those conditions shall promptly notify the other party in writing of the specific differing conditions before they are disturbed and before the affected work is performed.

The Contractor will be allowed 15 days from the notification of the Engineer's determination of whether or not an adjustment of the contract is warranted, in which to file a notice of potential claim in conformance with the provisions of Section 9-1.17D, "Final Payment and Claims," of the Standard Specifications and as specified herein; otherwise the decision of the Engineer shall be deemed to have been accepted by the Contractor as correct. The notice of potential claim shall set forth in what respects the Contractor's position differs from the Engineer's determination and provide any additional information obtained by the Contractor, including but not limited to additional geotechnical data. The notice of potential claim shall be accompanied by the Contractor's certification that the following were made in preparation of the bid: a review of the contract, Contract Documents, to the extent they were made available to bidders prior to the opening of bids, and an examination of the conditions above ground at the site. Supplementary information, obtained by the Contractor subsequent to the filing of the notice of potential claim, shall be submitted to the Engineer in an expeditious manner.

#### 5-1.13 VALUE ENGINEERING

Attention is directed to Section 4-1.07, "Value Engineering," of the Standard Specifications.

Prior to preparing a written value engineering change proposal, the Contractor shall request a meeting with the Engineer to discuss the proposal in concept. Items of discussion will also include permit issues, impact on other projects, impact on the project schedule, peer reviews, overall merit of the proposal, and review times required by the City.

If a value engineering change proposal submitted by the Contractor, and subsequently approved by the Engineer, provides for a reduction in contract time, 50 percent of that contract time reduction shall be credited to the City by reducing the contract working days, not including plant establishment. Attention is directed to "Beginning of Work, Time of Completion and Liquidated Damages" of these Special Provisions regarding the working days.

If a value engineering change proposal submitted by the Contractor, and subsequently approved by the Engineer, provides for a reduction in traffic congestion or avoids traffic congestion during construction, 60 percent of the estimated net savings in construction costs attributable to the cost reduction proposal will be paid to the Contractor. In addition to the requirements in Section 4-1.07, "Value Engineering," of the Standard Specifications, the Contractor shall provide detailed

comparisons of the traffic handling between the existing contract and the proposed change, and estimates of the traffic volumes and congestion.

# 5-1.14 PUBLIC SAFETY

The Contractor shall provide for the safety of traffic and the public in conformance with the provisions in Section 7-1.04, "Public Safety," of the Standard Specifications and these Special Provisions.

The Contractor shall install temporary railing (Type K) between a lane open to public traffic and an excavation, obstacle or storage area when the following conditions exist:

- A. Excavations The near edge of the excavation is 12 feet or less from the edge of the lane, except:
  - Excavations covered with sheet steel or concrete covers of adequate thickness to prevent accidental entry by traffic or the public.
  - 2. Excavations less than one foot deep.
  - 3. Trenches less than one foot wide for irrigation pipe or electrical conduit, or excavations less than one foot in diameter.
  - 4. Excavations parallel to the lane for the purpose of pavement widening or reconstruction.
  - 5. Excavations in side slopes, where the slope is steeper than 4:1 (horizontal: vertical).
  - 6. Excavations protected by existing barrier or railing.
- B. Temporarily Unprotected Permanent Obstacles The work includes the installation of a fixed obstacle together with a protective system, such as a sign structure together with protective railing, and the Contractor elects to install the obstacle prior to installing the protective system; or the Contractor, for the Contractor's convenience and with permission of the Engineer, removes a portion of an existing protective railing at an obstacle and does not replace such railing complete in place during the same day.
- C. Storage Areas Material or equipment is stored within 12 feet of the lane and the storage is not otherwise prohibited by the provisions of the Standard Specifications and these Special Provisions.

The approach end of temporary railing (Type K), installed in conformance with the provisions in this section "Public Safety" and in Section 7-1.04, "Public Safety," of the Standard Specifications, shall be offset a minimum of 15 feet from the edge of the traffic lane open to public traffic. The temporary railing shall be installed on a skew toward the edge of the traffic lane of not more than one foot transversely to 10 feet longitudinally with respect to the edge of the traffic lane. If the 15-foot minimum offset cannot be achieved, the temporary railing shall be installed on the 10 to 1 skew to obtain the maximum available offset between the approach end of the railing and the edge of the traffic lane, and an array of temporary crash cushion modules shall be installed at the approach end of the temporary railing.

Reflectors on temporary railing (Type K) shall conform to the provisions in "Pre-qualified and Tested Signing and Delineation Materials," of these Special Provisions.

Temporary crash cushion modules shall conform to the provisions in "Temporary Crash Cushion Module" of these Special Provisions.

Except for installing, maintaining and removing traffic control devices, whenever work is performed or equipment is operated in the following work areas, the Contractor shall close the adjacent traffic lane unless otherwise provided in the Standard Specifications and these Special Provisions:

Approach Speed of Public Traffic (Posted Limit) (Miles Per Hour)	Work Areas
Over 45	Within 6 feet of a traffic lane but not on a traffic lane
35 to 45	Within 3 feet of a traffic lane but not on a traffic lane

The lane closure provisions of this section shall not apply if the work area is protected by permanent or temporary railing or barrier.

When traffic cones or delineators are used to delineate a temporary edge of a traffic lane, the line of cones or delineators shall be considered to be the edge of the traffic lane, however, the Contractor shall not reduce the width of an existing lane to less than 10 feet without written approval from the Engineer.

When work is not in progress on a trench or other excavation that required closure of an adjacent lane, the traffic cones or portable delineators used for the lane closure shall be placed off of and adjacent to the edge of the traveled way. The spacing of the cones or delineators shall be not more than the spacing used for the lane closure.

Suspended loads or equipment shall not be moved nor positioned over public traffic or pedestrians facilities.

# **Special Requirements:**

The Contractor attention is directed to "Notification and Scheduling," of these Special Provisions. The Contractor shall notify the Police Department, Fire Departments, Ambulance Service, Schools, CHP, Caltrans, and the Engineer forty-eight (48) hours prior to any lane closure. Notification may be in conjunction with the scheduling requirements of the "Scheduling" portion of the Standard Specifications and these Special Provisions. The Contractor shall coordinate traffic control with the Sheriff's Department with respect to any special events that may be affected by construction activities. Particular attention shall be given to the construction of adequate facilities on any street to permit the passing of emergency vehicles.

Full compensation for conforming to the provisions in this section "Public Safety," including furnishing and installing temporary railing (Type K) and temporary crash cushion modules, shall be considered as included in the contract prices paid for the various items of work involved and no additional compensation will be allowed.

#### **5-1.15 TESTING**

Testing of materials and work shall conform to the provisions in "Quality Assurance," of the Standard Specifications and these Special Provisions.

Whenever the provisions of "Quality Assurance" of the Standard Specifications refer to tests or testing, it shall mean tests to assure the quality and to determine the acceptability of the materials and work.

The Engineer will refer to the "Quality Assurance Program" for acceptance testing requirements as appropriate for the project's size and scope. Minor quantities of materials from a known, reliable source may be accepted without testing if: a visual inspection of the material is performed and the supplier certifies that the material complies with specification requirements.

For construction materials that have been accepted by a Certificate of Compliance, job site inspection of materials tags and delivery notices shall be performed to verify acceptability of the supplied materials. As directed by the Engineer, further acceptance sampling and testing may be performed at the locations and frequencies as given in the "Quality Assurance Program"

The Engineer will deduct the costs for testing of materials and work found to be unacceptable, as determined by the tests performed by the Department, and the costs for testing of material sources identified by the Contractor which are not used for the work, from moneys due or to become due to the Contractor. The amount deducted will be determined by the Engineer.

# 5-1.16 RESPONSIBILITY TO OTHER ENTITIES

The Contractor shall be responsible for any liability imposed by law and for injuries to or death of any person including, but not limited to, workers and the public or damage to property, and shall indemnify and save harmless any county, city or district, its officers and employees connected with the work, within the limits of which county, city or district the work is being performed, all in the same manner and to the same extent conforming to the provisions in Section 7-1.05, "Indemnification," and Section 7-1.06, "Insurance," of the Standard Specifications, for the protection of the State of California and all officers and employees thereof connected with the work.

## 5-1.17 AREAS FOR CONTRACTOR'S USE

Attention is directed to the provisions in Section 5-1.32, "Areas for Use," of the Standard Specifications and these Special Provisions.

The project area (contract limits) shall be used only for purposes that are necessary to perform the required work. The Contractor shall not occupy the right of way, or allow others to occupy the right of way, for purposes which are not necessary to perform the required work.

No area is available for the exclusive use of the Contractor within the contract limits. The Contractor shall secure, at the Contractor's own expense, areas required for plant sites, storage of equipment or materials, or for other purposes.

Residence trailers will not be allowed within the project site.

The Contractor shall remove equipment, materials, and rubbish from the work areas and other City-owned property which the Contractor occupies. The Contractor shall leave the areas in a presentable condition in conformance with the provisions in "Cleanup," of the Standard Specifications.

The Contractor shall secure, at the Contractor's own expense, areas required for plant sites, storage of equipment or materials or for other purposes, if sufficient area is not available to the Contractor within the contract limits, or at the sites designated on the plans outside the contract limits.

The Contractor shall take all necessary precautions to protect the staging area from chemical contamination due to oil or fuel spills or any other contaminants. If contamination occurs, the site shall be decontaminated to the satisfaction of the Engineer prior to further improvement to the contaminated area or to further construction activities in general, whichever is applicable as determined by the Engineer. Methods of decontamination shall include any method deemed appropriate by the Engineer including removal and disposition of the contaminated soils in conformance with CEQA and regulatory agency requirements.

Full compensation for conforming to the provisions of this section, including furnishing all labor, materials, grading, tools, equipment and incidentals, and for doing all work associated with this section shall be considered as included in the prices paid for the various Contract items of work involved and no additional compensation will be allowed.

# 5-1.18 SOUND CONTROL REQUIREMENTS

The noise level from the Contractor's operations, between the hours of 7:00 p.m. and 7:00 a.m., shall not exceed 86 dBa at a distance of 50 feet, unless night work is otherwise permitted by the City Engineer. This requirement shall not relieve the Contractor from responsibility for complying with local ordinances regulating noise level.

All equipment shall have sound-control devices no less effective than those provided on the original equipment. No equipment shall have an unmuffled exhaust. As directed by the Engineer, the Contractor shall implement the appropriate additional noise mitigation measures including, but not limited to, shutting off idling equipment, or additional notifications of adjacent residents than already specified in these Special Provisions.

The noise level requirement shall apply to the equipment on the job or related to the job, including but not limited to trucks, transit mixers or transient equipment that may or may not be owned by the Contractor. The use of loud sound signals shall be avoided in favor of light warnings except those required by safety laws for the protection of personnel.

Full compensation for conforming to the requirements of this section shall be considered as included in the prices paid for the various contract items of work involved and no additional compensation will be allowed.

#### 5-1.19 PROJECT APPEARANCE

The Contractor shall maintain a neat appearance to the work and shall cleanup all tracked material and debris on a daily basis.

In areas visible to the public, the following shall apply:

- A. Broken concrete and debris developed during clearing and grubbing shall be disposed of concurrently with its removal. If stockpiling is necessary, the material shall be removed or disposed of weekly.
- B. Mud, dirt, soil, and any debris resulted in trail from equipment and construction will be cleaned and cleared from the roadway and away from traffic daily.
- C. The Contractor shall furnish trash bins for all debris from construction. All debris shall be placed in trash bins daily. Forms or falsework that are to be reused shall be stacked neatly concurrently with their removal. Forms and falsework that are not to be reused are to be disposed of concurrently with their removal.

Full compensation for conforming to the provisions in this section, not otherwise provided for, shall be considered as included in the prices paid for the various contract items of work involved and no additional compensation will be allowed.

#### **5-1.20 RECORDS**

The Contractor shall maintain cost accounting records for the contract pertaining to, and in such a manner as to provide a clear distinction between, the following six categories of costs of work during the life of the contract:

- A. Direct costs of contract item work.
- B. Direct costs of changes in character in conformance with Section 4-1.05B, "Work-Character Changes," of the Standard Specifications.
- C. Direct costs of extra work in conformance with Section 4-1.05, "Changes and Extra Work," of the Standard Specifications.
- D. Direct costs of work not required by the contract and performed for others.
- E. Direct costs of work performed under a notice of potential claim in conformance with the provisions in Section 9-1.17D(2), "Claim Statement," of the Standard Specifications.
- F. Indirect costs of overhead.

Cost accounting records shall include the information specified for extra work in Section 4-1.05, "Changes and Extra Work," of the Standard Specifications. The requirements for furnishing the Engineer completed daily extra work reports shall only apply to work paid for on a force account basis.

The cost accounting records for the contract shall be maintained separately from other contracts, during the life of the contract, and for a period of not less than 3 years after the date of acceptance of the contract. If the Contractor intends to file claims against the Department, the Contractor shall keep the cost accounting records specified above until complete resolution of all claims has been reached.

# 5-1,21 RELATIONS WITH CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD

The location of the project is within an area controlled by the Regional Water Quality Control Board. The Contractor shall be fully informed of rules, regulations, and conditions that may govern the Contractor's operations in the areas and shall conduct the work accordingly.

Copies of the order may be obtained at the City of Grass Valley Engineering Division Office located at 125 East Main Street, Grass Valley, CA 95945 [telephone (530) 274-4373].

Attention is directed to Section 5-1.36, "Property and Facility Preservation," and Section 7-1.05, "Indemnification," and Section 7-1.06, "Insurance," of the Standard Specifications.

#### 5-1.22 CONTRACTOR'S LICENSING LAWS

Attention is directed to the requirements specified in Section 3-1.06, "Contractor License", of the Standard Specifications. The Contractor shall possess a valid California Class "A" Contractor's License, or a combination of the following classes: C-7 - Low Voltage Systems Contractor, C-8 - Concrete Contractor, C10 - Electrical Contractor, C12 - Earthwork and Paving Contractors, C13 - Fencing Contractor, C27 - Landscaping Contractor, C31 - Construction Zone Traffic Control Contractor, C32 - Parking and Highway Improvement Contractor, C34 - Pipeline Contractor, C36 - Plumbing Contractor, D-63 Construction Cleanup Contractor, and all other classes required by the categories and types of work included in the contract at the time of the bid award. All licenses shall remain in effect throughout the term of the contract.

The designer shall be a licensed Professional Civil Engineer and combination of other licensed professionals that will be required to design the proposed improvements to current standards and the licenses shall remain in effect throughout the term of this agreement.

#### 5-1.23 ARBITRATION

Section 9-1.22, "Arbitration," of the Standard Specifications is amended in its entirety to read as follows:

# Section 9-1.22, "Dispute Resolution"

9-1.22 All claims filed with the City must be in writing and include the documents necessary to substantiate the claim. Claims must be filed within the time limits set forth in this contract. In no circumstances, however, may a claim be filed after the day of final payment. Nothing in this subsection is intended to extend the time limit or supersede notice requirements for the filing of claims as set forth elsewhere in this contract.

#### 1) Claims of \$50,000.00 or Less

- (a) The City will respond in writing to all written claims less than or equal to fifty thousand dollars (\$50,000.00) within forty-five (45) days of receipt of the claim. Within thirty (30) days of receipt of the claim, the City may request any additional documentation supporting the claim or relating to defenses or claims the City may have against the claimant.
- (b) If additional information is thereafter required, it shall be requested and provided pursuant to this subsection, upon mutual agreement of the City and the claimant.
- (c) The City's written response to the claim, as further documented, shall be submitted to the claimant within fifteen (15) days after receipt of the further documentation or within a period of time no greater than that taken by the claimant in producing the additional information, whichever is greater.

# 2) Claims Between \$50,000.01 and \$375,000.00

(a) The City will respond in writing to all written claims between fifty thousand dollars and one cent (\$50,000.01) and less than or equal to three hundred seventy-five thousand dollars (\$375,000.00), within sixty (60) days of receipt of the claim. Within thirty (30) days of receipt of the claim, the City may request, in writing, any additional documentation supporting the claim or relating to defense to the claim the City may have against the claimant.

- (b) If additional information is thereafter required, it shall be requested and provided pursuant to this Subdivision, upon mutual agreement of the City and the claimant.
- (c) The City's written response to the claim, as further documented, shall be submitted to the claimant with in thirty (30) days after receipt of the further documentation or within a period of time no greater than that taken by the claimant in producing the additional information or requested documents, whichever is greater.
- 3) <u>Claims in Excess of \$375,000.00</u> The City shall, within a reasonable time after the presentation of any claim in excess of \$375,000.00, make a decision in writing on such claim.
- 4) Meet and Confer Conference
  - (a) If the claimant disputes the City's written response, or the City fails to respond within the time prescribed, the claimant may so notify the City, in writing, either within fifteen (15) days of receipt of the City's response or within fifteen (15) days of the City's failure to respond within the time prescribed, respectively, and demand an informal conference to meet and confer for settlement of the issues in dispute. Upon a demand, the City shall schedule a meet and confer conference within thirty (30) days for settlement of the dispute.
  - (b) If, following the meet and confer conference, the claim or any portion thereof remains in dispute, the claimant may file a claim pursuant to Chapter 1 (commencing with Section 900) and Chapter 2 (commencing with Section 910) of Part 3 of Division 3.6 of Title 1 of the California Government Code. For the purposes of those provisions, the running of the period of time within which a claim must be filed shall be tolled from the time the claimant submits his or her written claim pursuant to this Section until the time that claim is denied as a result of the meet and confer process, including any period of time utilized by the meet and confer process.
- 5) <u>Contractor's Duty During Claim Resolution</u>: The Contractor shall proceed with the Work in accordance with the plans and specifications and determinations and instructions of the City Engineer during the resolution of any claims disputes.
- 6) Certification. The Contractor shall certify in writing, at the time of submission of any claim, as follows:

I certify under penalty of perjury under the laws of the State of California, that the claim is made in good faith, that the supporting data are accurate and complete, and that the amount requested accurately reflects the monies due for work performed under the Contract for which the City of Grass Valley is liable.

By:	
(Contractor's signature)	

- 7) <u>City Remedies</u>. In the event the Contractor refuses or neglects to make good any loss or damage for which the Contractor is responsible under this Contract, the City may itself, or by the employment of others, make good any such loss or damage, and the cost and expense of doing so, including any reasonable engineering, legal and other consultant fees, and any costs of administrative and managerial services, shall be charged to the Contractor. Such costs and expenses may be deducted by the City from claims for payment made by the Contractor for work completed or remaining to be completed.
- 8) Assignment. In entering into a public works contract or a subcontract to supply goods, services, or materials pursuant to this contract, the Contractor and all subcontractors shall offer and agree to assign to the City all rights, title, and interest in and to all causes of action it may have under section 4 of the Clayton Act (15 U.S.C. Sec. 15) or under the Cartwright Act (Chapter 2 [commencing with Section 16700] of Part 2 of Division 7 of the Business and Professions Code), arising from purchases of goods, services or materials pursuant to the public works contract or subcontract. This assignment shall be made and become effective at the time the City tenders final payment to the Contractor, without further acknowledgment by the parties.
- 9) <u>Contractor Waiver and Limitation</u>. The Contractor agrees that it can be adequately compensated by money damages for any breach of this Contract which may be committed by the City and hereby agrees that no default, act, or omission of the City or the Engineer, shall constitute a material breach of the Contract entitling the Contractor to

cancel or rescind the provisions of this Contract or (unless the City shall so consent or direct in writing) to suspend or abandon performance of all or any part of the work. The Contractor hereby waives any and all rights and remedies to which it might otherwise be or become entitled, save only its right to money damages.

10) <u>Venue</u>. Any litigation arising out of this Contract shall be brought in the Superior Court of Nevada County, and the Contractor hereby waives the removal provisions of Code of Civil Procedure Section 394.

#### 5-1.24 NOTICE OF POTENTIAL CLAIM

Attention is directed to the requirements specified in Section 5-1.43, "Potential Claims And Dispute Resolution," of the Standard Specifications.

#### 5-1.25 FINAL PAYMENT AND CLAIMS

Attention is directed to Section 9-1.17D, "Final Payment and Claims," of the Standard Specifications.

If the Contractor files a timely written statement of claims in response to the proposed final estimate, the City will submit a claim position letter to the Contractor by hand delivery or deposit in the U.S. mail. The claim position letter will delineate the City's position on the Contractor's claims. If the Contractor disagrees with the claim position letter, the Contractor shall submit a written notification of its disagreement to be received by the City not later than 15 days after the Contractor's receipt of the claim position letter. The written notification of disagreement shall set forth the basis for the Contractor's disagreement and be submitted to the office designated in the claim position letter. The Contractor's failure to provide a timely, written notification of disagreement shall constitute the Contractor's acceptance and agreement with the determinations provided in the claim position letter and with final payment pursuant to the claim position letter.

If the Contractor files a timely notification of disagreement with the City claim position letter, the City Engineer or a board of review appointed by the City Engineer shall review claims that remain in dispute and may meet with the Contractor within 45 days after receipt by the City of the notification of disagreement. Attendance by the Contractor at the City meeting concerning the notification of disagreement shall be mandatory.

If the City fails to submit a claim position letter to the Contractor within 135 days after the acceptance of the contract and the Contractor has claims that remain in dispute, the Contractor may request a meeting with the City Engineer or a board of review appointed by the City Engineer to review claims that remain in dispute. The Contractor's request for a meeting shall identify the claims that remain in dispute. If the Contractor files a request for a meeting, the City Engineer or a board of review appointed by the City Engineer will meet with the Contractor within 45 days after the City receives the request for the meeting. Attendance by the Contractor at this review meeting shall be mandatory.

Failure of the Contractor to file a timely written statement of claims in response to the proposed final estimate, or to file a timely notification of disagreement with the City's claim position letter, or to attend the City's review meeting shall constitute a failure to pursue diligently and exhaust the administrative remedies in the contract and shall be a bar to future legal proceedings by Contractor.

#### 5-1.26 SURFACE MINING AND RECLAMATION ACT

Attention is directed to the Surface Mining and Reclamation Act of 1975, commencing in Public Resources Code, Mining and Geology, Section 2710, which establishes regulations pertinent to surface mining operations, and to California Public Contract Code Section 10295.5.

Material from mining operations furnished for this project shall only come from permitted sites in compliance with California Public Contract Code Section 10295.5.

### 5-1.27 REMOVAL OF ASBESTOS AND HAZARDOUS SUBSTANCES

When the presence of asbestos or hazardous substances are not shown on the plans or indicated in the specifications and the Contractor encounters materials which the Contractor reasonably believes to be asbestos or a hazardous substance as defined in Section 25914.1 of the Health and Safety Code, and the asbestos or hazardous substance has not been rendered harmless, the Contractor may continue work in unaffected areas reasonably believed to be safe. The Contractor shall immediately cease work in the affected area and report the condition to the Engineer in writing.

In conformance with Section 25914.1 of the Health and Safety Code, removal of asbestos or hazardous substances including exploratory work to identify and determine the extent of the asbestos or hazardous substance will be performed by separate contract.

If delay of work in the area delays the current controlling operation, the delay will be considered a right of way delay and the Contractor will be compensated for the delay in conformance with the provisions in Section 8-1.07, " Delays," of the Standard Specifications.

# 5-1.28 EXCAVATION SAFETY PLANS

The Contractor's attention is directed to requirements of "Earthwork," of the Special Provisions concerning Temporary Shoring Plan and Section 7-1.02K(6)(b), "Excavation Safety," of the Standard Specifications.

The Contractor shall submit a Temporary Shoring Safety System Plan to the Engineer in accordance with "Earthwork," of these Special Provisions. The Contractors attention is directed to the requirements specified in Section "Earthwork," of these Special Provisions.

Full compensation for conforming to the provisions of this section, not otherwise provided for in other sections of these Special Provisions, shall be considered as included in the prices paid for the various Contract items of work involved and no additional compensation will be allowed.

#### 5-1.29 AIR POLLUTION CONTROL

Air pollution control shall conform to the provisions of Section 14-9, "Air Quality," of the Standard Specifications and these Special Provisions.

No burning of materials to be disposed of will be permitted for this project.

Full compensation for conforming to the provisions of this section including, but not limited to, obtaining permits and performing work in accordance with any permit requirements, not otherwise provided for, shall be considered as included in the prices paid for the various Contract items of work involved and no additional compensation will be allowed.

#### **5-1.30 PERMITS**

Attention is directed to the provisions in Sections 5-1.20B, "Permits, Licenses, Agreements, and Certifications," of the Standard Specifications and these Special Provisions.

Full compensation for conforming to the provisions in this Section and to the requirements in the permit, not otherwise provided for in other sections of these Special Provisions, shall be considered as included in the prices paid for the various Contract items of work involved and no additional compensation will be allowed.

#### 5-1.31 INSURANCE

Throughout the period of this agreement, the CONTRACTOR shall provide the following minimum insurance coverage as listed below. CONTRACTOR shall file with CITY certificate(s) of Insurance and endorsements, in a form acceptable to CITY, and consistent with this agreement at the time of execution of this agreement. The insurance company must be acceptable to CITY, with a Best's Rating of no less than A:VII. Documentation of such rating acceptable to the CITY shall be provided at the same time Insurance Certificates are submitted.

Any deductibles must be declared to, and approved by, the City.

In the event any of the required policies are canceled prior to the completion of the project and the CONTRACTOR does not furnish a new certificate(s) of insurance prior to cancellation, the CITY may obtain the required insurance and deduct the premium(s) from Contract monies due the CONTRACTOR.

#### 5-1.31.1 WORKER'S COMPENSATION AND EMPLOYERS LIABILITY INSURANCE

The CONTRACTOR shall maintain adequate Workers' Compensation Insurance under the Laws of the State of California. CONTRACTOR shall fully comply with the provisions of Section 3700 of the Labor Code, which requires every employer to be insured against liability for Workers' Compensation or to undertake self insurance in accordance with the provisions of that Code, before commencing the performance of the work. CONTRACTOR shall require all subcontractors to maintain adequate Workers' Compensation Insurance. Certificates of such Workers' Compensation shall be filed forthwith with the CITY upon demand.

By CONTRACTOR'S signature hereunder, CONTRACTOR certifies that he/she is aware of the provisions of Section 3700 of the California Labor Code which require every employer to be insured against liability for workers' compensation or to undertake self-insurance in accordance with the provisions of that Code, and he/she will comply with such provisions before commencing the performance of this Contract. If such insurance is underwritten by any agency other than State Compensation Fund, such agency shall be a company authorized to do business in the State of California.

Worker's Compensation Insurance shall be provided as required by any applicable law or regulation. Employer's liability insurance shall be provided in amounts not less than the following:

One Million dollars (\$1,000,000) each accident for bodily injury by accident

One Million dollars (\$1,000,000) policy limit for bodily injury by disease

One Million dollars (\$1,000,000) each employee for bodily injury by disease

If there is an exposure of injury to CONTRACTOR'S employees under the U.S. Longshoremen's and Harbor Worker's Compensation Act, the Jones Act, or under laws, regulations, or statutes applicable to maritime employees, coverage shall be included for such injuries or claims.

Each Worker's Compensation policy shall be endorsed with the following specific language:

**Cancellation Notice:** "This policy shall not be canceled or materially changed without first giving thirty (30) days prior written notice to the City of Grass Valley."

**Waiver of Subrogation:** "The Insurance Company agrees to waive all rights of subrogation against the City of Grass Valley, its elected or appointed officials, agents, employees and volunteers for losses paid under the terms of this policy which arise from the work performed by the Named Insured for the City of Grass Valley.

#### 5-1.31.2 GENERAL LIABILITY INSURANCE

Commercial General Liability insurance covering all operations by or on behalf of CONTRACTOR, providing insurance for bodily injury liability and property damage liability for the limits of liability indicated below and including coverage for: premises; operations; products and completed operations; contractual liability insuring the obligations assumed by CONTRACTOR in this Agreement; broad form property damage (including completed operations); explosion, collapse, and underground hazards; personal injury liability.

Except with respect to bodily injury and property damage included within the products and completed operations hazards, the aggregate limits, where applicable, shall apply separately to CONTRACTOR'S work under the Contract.

One of the following forms is required: Commercial General Liability (Occurrence); or Commercial General Liability (Claims Made).

If CONTRACTOR carries a Commercial General Liability (Occurrence) policy:

- 1. The limits of liability shall not be less than:
- > One Million dollars (\$1,000,000) each occurrence (combined single limit for bodily injury and property damage)
  - One Million dollars (\$1,000,000) Personal Injury Liability
  - Two Million dollars (\$2,000,000) Products-Completed Operations
  - > Two Million dollars (\$2,000,000) General Aggregate
- 2. If the policy does not have an endorsement providing that the General Aggregate Limit applies separately, or if defense costs are included in the aggregate limits, then the required aggregate limits shall be Two Million dollars (\$2,000,000).

# 5-1.31.3 CONFORMITY OF COVERAGES

If more than one policy is used to meet the required coverages, such as a separate umbrella policy, such policies shall be consistent with all other applicable policies used to meet these minimum requirements. For example, all policies shall be Occurrence Liability policies, or all shall be Claims Made Liability policies if approved by the CITY as noted above. In no case shall the types of coverages be different.

# 5-1.31.4 ADDITIONAL REQUIREMENTS

Premium Payments: The insurance companies shall have no recourse against the CITY and funding agencies, its officers and employees or any of them for payment of any premiums or assessments under any policy issued by a mutual insurance company.

Policy Deductibles: The CONTRACTOR shall be responsible for all deductibles in all of CONTRACTOR'S insurance policies. The amount of deductibles for insurance coverage required herein should be reasonable and subject to CITY'S approval.

CONTRACTOR'S Obligations: CONTRACTOR'S indemnity and other obligations shall not be limited by the foregoing insurance requirements and shall survive the expiration of this agreement.

Material Breach: Failure of the CONTRACTOR to maintain the insurance required by this agreement, or to comply with any of the requirements of this section, shall constitute a material breach of the entire agreement.

Duration of Coverage: City must be an additional insured for completed operations for a period of one (1) year after completion of the work.

Project Reference: The Certificate of Insurance must reference the project specifically by project title

# 5-1.31.5 ENDORSEMENTS

Each Commercial General Liability policy shall be endorsed with the following specific language:

Cancellation Notice: "This policy shall not be canceled, material reduced, or materially changed without first giving thirty (30) days prior written notice to the City of Grass Valley."

"Provisions Regarding the Insured's Duties: Any failure to comply with reporting provisions of the policy or breaches or violations of warranties shall not affect coverage provided to the City of Grass Valley, its elected or appointed officers, officials, employees or volunteers."

"Except as stated above, nothing herein shall be held to waive, alter or extend any of the limits, conditions, agreements or exclusions of the policy to which this endorsement is attached."

"The City of Grass Valley, and additional insureds, and all insureds officers, agents, outside parties hired to inspect and/or design the work, employees, and volunteers are to be covered as insured for all liability arising out of the operations by or on behalf of the named insured in the performance of this Agreement."

The City of Grass Valley's policy of insurance shall be excess and noncontributing. "The insurance provided by the Contractor, including any excess liability or umbrella form coverage, is primary coverage to the City of Grass Valley and additional insureds, with respect to any insurance or self-insurance programs maintained by the City of Grass Valley and additional insureds, and no insurance held or owned by the City of Grass Valley and additional insureds shall be called upon to contribute to a loss."

## 5-1.31.6 AUTOMOBILE LIABILITY INSURANCE

CONTRACTOR shall provide Automobile Liability insurance covering bodily injury and property damage in an amount no less than One Million dollars (\$1,000,000) combined single limit for each occurrence.

Covered vehicles shall include owned, non-owned, and hired automobiles/trucks.

Endorsements: The endorsements listed above for General Liability shall also apply to the Automobile Liability Policy.

# 5-1.32 WARRANTY

Should any failure of the work occur within a period of one year from the acceptance of the project by the Grass Valley City Council due to faulty materials, poor workmanship, or defective equipment, the Contractor shall promptly make the needed repairs at his or her expense in accordance with the Special Provisions and to the satisfaction of the Engineer.

Security for this warranty shall be in the form of the Performance Bond, required elsewhere in these specifications, which shall remain in effect for a period of one (1) year after acceptance of the project by the Grass Valley City Council. The Performance Bond will not be reduced to an amount less than the bid amount of the project prior to the expiration of the one (1) year warranty period.

The City is hereby authorized to make such repairs, or to have such repairs made by others, if the Contractor fails to make such repairs, or to have such repairs made by others, if the Contractor fails to make or undertake with due diligence the aforesaid repairs within ten (10) days after receiving written notice of such failure or within a time specified in the notice if different; provided, however, that in case of an emergency where, in the opinion of the Engineer, that delay would cause serious loss or damages, or a serious hazard to the public, and a reasonable attempt has been made to notify the Contractor, the repairs may be made without prior notice to the Contractor; and the Contractor's sureties shall be liable for the entire cost thereof.

SECTION 6 (BLANK)

SECTION 7 (BLANK)

**SECTION 8** MATERIALS

**SECTION 8-1 MISCELLANEOUS** 

# 8-1.01 PREQUALIFIED AND TESTED SIGNING AND DELINEATION MATERIALS

The California Department of Transportation maintains a list of Pre-qualified and Tested Signing and Delineation Materials. The Engineer shall not be precluded from sampling and testing products on the list of Pre-qualified and Tested Signing and Delineation Materials.

The manufacturer of products on the list of Pre-qualified and Tested Signing and Delineation Materials shall furnish the Engineer a Certificate of Compliance in conformance with the provisions in Certificates of Compliance," of the Standard Specifications for each type of traffic product supplied.

For those categories of materials included on the list of Pre-qualified and Tested Signing and Delineation Materials, only those products shown within the listing may be used in the work. Other categories of products, not included on the list of Pre-qualified and Tested Signing and Delineation Materials, may be used in the work provided they conform to the requirements of the Standard Specifications.

Materials and products may be added to the list of Pre-qualified and Tested Signing and Delineation Materials if the manufacturer submits a New Product Information Form to the New Product Coordinator at the Transportation Laboratory. Upon a Departmental request for samples, sufficient samples shall be submitted to permit performance of required tests. Approval of materials or products will depend upon compliance with the specifications and tests the Department may elect to perform.

#### SECTION 8-2 PORTLAND CEMENT CONCRETE

Portland cement concrete shall conform to the provisions in Section 90, "Concrete," of the Standard Specifications and these Special Provisions.

Mineral admixture shall be combined with cement in conformance with the provisions in Section 901.02B(3), "Supplementary Cementitious Materials," of the Standard Specifications for the concrete materials.

The Department maintains a list of sources of fine and coarse aggregate that have been approved for use with a reduced amount of mineral admixture in the total amount of cementitious material to be used. A source of aggregate will be considered for addition to the approved list if the producer of the aggregate submits to the Transportation Laboratory certified test results from a qualified testing laboratory that verify the aggregate complies with the requirements. Prior to starting the testing, the aggregate test shall be registered with the Department. A registration number can be obtained by calling (916) 227-7228. The registration number shall be used as the identification for the aggregate sample in correspondence with the Department. Upon request, a split of the tested sample shall be provided to the Department. Approval of aggregate will depend upon compliance with the specifications, based on the certified test results submitted, together with any replicate testing the Department may elect to perform. Approval will expire 3 years from the date the most recent registered and evaluated sample was collected from the aggregate source.

Qualified testing laboratories shall conform to the following requirements:

- A. Laboratories performing ASTM Designation: C 1293 shall participate in the Cement and Concrete Reference Laboratory (CCRL) Concrete Proficiency Sample Program and shall have received a score of 3 or better on all tests of the previous 2 sets of concrete samples.
- B. Laboratories performing ASTM Designation: C 1260 shall participate in the Cement and Concrete Reference Laboratory (CCRL) Pozzolan Proficiency Sample Program and shall have received a score of 3 or better on the shrinkage and soundness tests of the previous 2 sets of pozzolan samples.

Aggregates on the list shall conform to one of the following requirements:

- A. When the aggregate is tested in conformance with the requirements in California Test 554 and ASTM Designation: C 1293, the average expansion at one year shall be less than or equal to 0.040 percent; or
- B. When the aggregate is tested in conformance with the requirements in California Test 554 and ASTM Designation: C 1260, the average of the expansion at 16 days shall be less than or equal to 0.15 percent.

The amounts of cement and mineral admixture used in cementitious material shall be sufficient to satisfy the minimum cementitious material content requirements specified in Section 90-1.02, "Materials," of the Standard Specifications and shall conform to the following:

- A. The minimum amount of cement shall not be less than 75 percent by weight of the specified minimum cementitious material content.
- B. The minimum amount of mineral admixture to be combined with cement shall be determined using one of the following criteria:
  - 1. When the calcium oxide content of a mineral admixture is equal to or less than 2 percent by weight, the amount of mineral admixture shall not be less than 15 percent by weight of the total amount of cementitious material to be used in the mix.
  - 2. When the calcium oxide content of a mineral admixture is greater than 2 percent by weight, and any of the aggregates used are not listed on the approved list as specified in these Special Provisions, then the amount of mineral admixture shall not be less than 25 percent by weight of the total amount of cementitious material to be used in the mix.
  - 3. When the calcium oxide content of a mineral admixture is greater than 2 percent by weight and the fine and coarse aggregates are listed on the approved list as specified in these Special Provisions, then the amount of mineral admixture shall not be less than 15 percent by weight of the total amount of cementitious material to be used in the mix.
  - 4. When a mineral admixture that conforms to the provisions for silica fume in Section 90-1.02B(3), "Supplementary Cementitious Materials," of the Standard Specifications is used, the amount of mineral admixture shall not be less than 10 percent by weight of the total amount of cementitious material to be used in the mix.
  - 5. When a mineral admixture that conforms to the provisions for silica fume in Section 90-1.02B(3), "Supplementary Cementitious Materials," of the Standard Specifications is used and the fine and coarse aggregates are listed on the approved list as specified in these Special Provisions, then the amount of mineral

admixture shall not be less than 7 percent by weight of the total amount of cementitious material to be used in the mix.

C. The total amount of mineral admixture shall not exceed 35 percent by weight of the total amount of cementitious material to be used in the mix. The total weight of cement and mineral admixture per cubic yard shall not exceed the specified maximum cementitious material content.

Unless otherwise specified, mineral admixture will not be required in Portland cement concrete used for precast concrete girders.

The Contractor will be permitted to use Type III Portland cement for concrete used in the manufacture of precast concrete members.

SECTION 9 (BLANK)

#### SECTION 10 CONSTRUCTION DETAILS

#### **SECTION 10-1 GENERAL**

# 10-1.01 SCOPE OF WORK

The scope of work, in general, includes; installation of permeable vehicular brick pavement, construction of concrete curbs, gutters, walkways, islands, crosswalks, and accessible ramps, drainage improvements, water improvements, street lighting improvements, steel railing construction, planter box construction, irrigation and landscaping improvements. Other related items not mentioned above, that are required by the plans, specifications or these Special Provisions shall be performed, placed, constructed, or installed.

# 10-1.02 GENERAL REQUIREMENTS

See Request for Qualifications and Request for Proposals exhibits and specifications for order of work and critical project constraints. The order of work shall conform to the provisions in the Standard Specifications and these Special Provisions.

Coordination and scheduling of construction activities for this project is of the upmost importance to minimize the impact to stores/businesses and public by limiting construction activities to non-businesses hours for the vast majority of the project. Mill Street will remain open to the public and delivery vehicles during normal businesses hours whenever possible

The Contractor's attention is directed to the requirements of "Cooperation", "Mobilization," "Maintaining Traffic" and "Traffic Control System" of these Special Provisions, the Project Plans, and the Standard Specifications.

Except as otherwise provided or with City Engineer approval of reduced roadway widths, the full width of the traveled way shall be open for use by public traffic on Saturdays, Sundays and designated legal holidays; after 4:00 p.m. Monday through Friday and when construction operations are not actively in progress.

Weekend hours of work, which do not significantly change the cost of the work may be permitted upon the written request of the Contractor if, in the opinion of the Engineer, public traffic will be adequately served and the work expedited. These deviations shall not be adopted by the Contractor until the Engineer has approved them in writing. All other modifications will be made by contract change order.

The Contractor shall provide the Engineer all required submittals within the time frame specified by the Special Provisions, the Project Plans, and/or the Standard Specifications.

The Contractor shall submit to the Engineer a progress schedule in accordance with Section 8-1.02, "Schedule," of the Standard Specifications and these Special Provisions. Attention is directed to the requirements of these sections for scheduling a pre-construction scheduling conference within 10 working days of the approval of the contract and submitting a baseline schedule to the Engineer within 20 days of the contract approval.

The Contractor is responsible for verifying the location of all existing underground facilities, within the project area, that may have potential to conflict with the location of proposed improvements, and other work as shown on the Plans. The City has made every effort to show locations of any and all existing surface and subsurface structures. However, actual field conditions and locations can vary considerably from the plan locations. Therefore, the City cannot, and does not, assume responsibility for the existence or location of any structure such as, but not limited to, utilities and pipelines. The contractor is responsible for contacting all agencies and/or owners to verify this information prior to and during construction of any of the proposed improvements. If any existing utilities are found in conflict with the proposed location of the improvements shown on the plans, the Contractor shall contact the Engineer. The Engineer shall provide the Contractor with new grades to eliminate such conflict or shall arrange to have the utilities relocated to avoid the conflict. The Contractor shall work with the Engineer to schedule surveyors to be onsite during pot-holing of conflicts for utility elevation verification. Any delays, which may result from failure of the Contractor to pothole potential utility conflicts, shall be at the Contractor's expense.

At the end of each working day if a difference in excess of three inches (3") exists between the elevation of the existing pavement and the elevation of excavations within six feet (6') of the traveled way, material shall be placed and compacted against the vertical cuts adjacent to the traveled way unless Type K barrier rail has been placed between the traveled way and the excavation in accordance with "Type K Temporary Railing "of the Standard Specifications and these Special Provisions. During excavation operations, native material may be used for this purpose; however, once placing of the structural section commences, structural material shall be used. The material shall be placed to the level of the elevation of the top of existing pavement and tapered at a slope of 1:4 (vertical:horizontal) or flatter to the bottom of the excavation. Treated base shall not be used for the taper. Full compensation for placing the material on a 1:4 slope, regardless of the number of times the material is required, and subsequent removing or reshaping of the material to the lines and grades shown on the plans shall be considered as included in the contract price paid for the materials involved and no additional compensation will be allowed. No payment will be made for material placed in excess of that required for the structural section.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all work involved in the provisions of this section, including, but not limited to, coordination with the applicable utility companies, pot-holing, excavation and backfill as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in prices paid for the various Contract Items of work involved and no additional compensation will be allowed.

# 10-1.03 REQUEST FOR INFORMATION

All Requests for Information (RFI's) from the Contractor shall be submitted in writing to the Engineer, and shall be numbered sequentially as they are generated. The Engineer will have 5 working days from the date of receipt of each RFI to provide a response to the Contractor. All requests must come from the prime Contractor, the Engineer will not respond to RFI's received directly from subcontractors.

If the response provided by the Engineer is not satisfactory for the Contractor, the RFI may be re-submitted with more detailed requests noting the particular areas that have not been addressed. The Engineer will have three (3) working days to respond to the second request from the Contractor. If the second response is still not satisfactory to the Contractor, a meeting will be scheduled to resolve any outstanding items that have not been properly addressed.

A Request for Information shall only be used for obtaining information or clarification on project documents. The RFI process is not the proper media for notification of potential claims, writing letters, requesting a change order, etc... If the Contractor wishes to file a Notice of Potential Claim, it shall be filed in accordance with Section 5-1.43, "Potential Claims and Dispute Resolution," of the Standard Specifications.

## 10-1.04 LINES AND GRADES

Attention is directed to "Lines and Grades," of the Standard Specifications.

The Contractor shall be responsible for setting stakes or marks that the Contractor determines to be necessary to establish the lines and grades required for the completion of the work specified. The Engineer reserves the right to check, correct or require layout work to be revised in order to construct the improvements as shown on the plans and as directed by the Engineer. If any stakes or marks are destroyed or damaged, it is the Contractor's responsibility to reestablish the stakes or marks.

If the Contractor determines that conditions in the field would cause a conflict with the lines and grades shown on the plans or otherwise feels that there are errors in the lines and grades to be established he shall immediately notify the Engineer for clarification. Attention is directed to "Requests for Information" of these provisions.

Full compensation for conforming to the provisions of this section shall be considered as included in the prices paid for the various Contract items of work involved and no additional compensation will be allowed.

## 10-1.05 FINAL DESIGN AND ENGINEERING

This work shall consist of the final design, engineering, specification, and permitting, as well as the coordination and scheduling of any special inspections for all streetscape improvements.

The conceptual plans show the overall layouts, general schematics and basic equipment and improvements desired by the City. The contractor shall employ the services of a Professional Engineer/Designer to confirm and finalize all aspects of the streetscape improvements design, included, but not limited to, final layout, equipment specifications, construction methods, construction details, control systems, irrigation system, electrical system, water system, and all miscellaneous components and appurtenances.

The Designer shall prepare proposed plans and a final equipment list and submit to the City for review as further described in the Request for Proposals. A complete stamped and signed construction plan set shall be prepared by the Contractor's Designer and submitted for final approval. The Contractor's Engineer/Designer shall be the Engineer of Record for the Streetscape Improvements Project design.

Final design of the electrical system shall include a complete electrical design of all equipment, conduit and wiring sizing and diagrams, and all required appurtenances and shutoffs.

Final design of the water system improvements shall include a complete design of all fittings, valves, service connections, hydrants and all required appurtenances in accordance with City Improvement Standards.

Final design of the drainage system improvements shall include a complete design of all inlets, grates, slotted drains, gutters, culverts, bioswales and permeable pavers and the grading, and subgrade construction necessary for a sound, fully functional and efficient drainage system.

Final design of the irrigation and landscaping improvements shall include a complete design of all equipment, valves, piping, wiring, pipe, fittings and appurtenances and comprehensive irrigation schedule and planting list as necessary to establish a low maintenance, attractive, mature landscape appearance.

No geo-technical report is currently available for the project area The contractor may assume a worst case scenario or decide to perform a geo-technical evaluation as part of the design process in order to more precisely specify structural components and details.

If specific backfill compaction levels are specified in the design for structural components, the Contractor shall be responsible for special inspection and compaction testing needed to verify proper compaction results are achieved.

Full compensation for furnishing all labor, materials, and incidentals and for doing all the work involved in finalizing all aspects of the design, engineering and inspection, as necessary for the construction of complete, safe, accessible and fully functional downtown streetscape improvements, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

# 10-1.06 WATER POLLUTION CONTROL

#### 10-1.06.1 GENERAL

Water pollution control work shall conform to the provisions in Section 13, "Water Pollution Control," of the Standard Specifications, section of these Special Provisions entitled "Relations With California Regional Water Quality Control Board," and these Special Provisions.

The Contractor shall perform water pollution control work in conformance with the requirements in the "Storm Water Pollution Prevention Plan (SWPPP) and Water Pollution Control Program (WPCP) Preparation Manual" and addenda in effect on the day the Notice to Contractors is dated. This manual is referred to as the "Preparation Manual." Copies of the Preparation Manual may be obtained from:

State of California Department of Transportation Publication Distribution Unit 1900 Royal Oaks Drive Sacramento, California 95815 Telephone: (916) 445-3520

The Preparation Manual and other references for performing water pollution control work are available from the Department's Construction Storm Water and Water Pollution Control web site at: http://www.dot.ca.gov/hq/construc/stormwater/stormwater1.htm.

The Contractor shall know and fully comply with applicable provisions of the Manuals, and Federal, State, and local regulations and requirements that govern the Contractor's operations and storm water and non-storm water discharges from both the project site and areas of disturbance outside the project limits during construction. Attention is directed to Section 7, "Legal Relations and Responsibility to the Public," of the Standard Specifications and these Special Provisions.

Water pollution control requirements shall apply to storm water and non-storm water discharges from areas outside the project site that are directly related to construction activities for this contract including, but not limited to, asphalt batch plants, material borrow areas, concrete plants, staging areas, storage yards and access roads. The Contractor shall comply with the Manuals for those areas and shall implement, inspect and maintain the required water pollution control practices. Installing, inspecting and maintaining water pollution control practices on areas outside the highway right of way not specifically arranged and provided for by the Department for the execution of this contract, will not be paid for.

The Contractor shall be responsible for penalties assessed or levied on the Contractor or the City as a result of the Contractor's failure to comply with the provisions in this section "Water Pollution Control" including, but not limited to, compliance with the applicable provisions of the Manuals, and Federal, State and local regulations and requirements as set forth therein.

Penalties as used in this section shall include fines, penalties and damages, whether proposed, assessed, or levied against the Department or the Contractor, including those levied under the Federal Clean Water Act and the State Porter-Cologne Water Quality Control Act, by governmental agencies or as a result of citizen suits. Penalties

shall also include payments made or costs incurred in settlement for alleged violations of the Manuals, or applicable laws, regulations, or requirements. Costs incurred could include sums spent instead of penalties, in mitigation or to remediate or correct violations.

The Contractor shall notify the Engineer immediately upon request from the regulatory agencies to enter, inspect, sample, monitor, or otherwise access the project site or the Contractor's records pertaining to water pollution control work. The Contractor and the Department shall provide copies of correspondence, notices of violations, enforcement actions or proposed fines by regulatory agencies to the requesting regulatory agency.

#### 10-1.06.2 WATER POLLUTION CONTROL IMPLEMENTATION

Unless otherwise specified, the Contractor shall be responsible throughout the duration of the project for installing, constructing, inspecting, maintaining, removing, and disposing of the water pollution control practices. Unless otherwise directed by the Engineer, the Contractor's responsibility for "Water Pollution Control" implementation shall continue throughout any temporary suspension of work ordered in conformance with the provisions in Section 8-1.06, "Suspensions," of the Standard Specifications. Requirements for installation, construction, inspection, maintenance, removal, and disposal of water pollution control practices shall conform to the requirements in the Manuals and these Special Provisions.

If the Contractor or the Engineer identifies a deficiency in the implementation of the "Water Pollution Control" practices, the deficiency shall be corrected immediately. The deficiency may be corrected at a later date and time if requested by the Contractor and approved by the Engineer in writing, but shall be corrected prior to the onset of precipitation. If the Contractor fails to correct the identified deficiency by the date agreed or prior to the onset of precipitation, the project shall be in nonconformance with this section. Attention is directed to Section 5-1.03, "Engineer's Authority," of the Standard Specifications, and to "Retention of Funds" of this section for possible nonconformance penalties.

If the Contractor fails to conform to the provisions of this section, "Water Pollution Control," the Engineer may order the suspension of construction operations until the project complies with the requirements of this section.

#### 10-1.06.3 PAYMENT

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in "Water Pollution Control" including, but not limited to installing, constructing, inspecting, maintaining, removing, and disposing of the water pollution control practices including non-storm water management, waste management and materials pollution water pollution control practices, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.06.4 CONSTRUCTION SITE MANAGEMENT

Construction site management shall consist of controlling potential sources of water pollution before they come in contact with storm water systems or watercourses. The Contractor shall control material pollution and manage waste and non-storm water existing at the construction site by implementing effective handling, storage, use, and disposal practices.

The Contractor shall train all employees and subcontractors regarding:

- A. Material pollution prevention and control;
- B. Waste management;
- C. Non-storm water management;
- D. Identifying and handling hazardous substances; and
- E. Potential dangers to humans and the environment from spills and leaks or exposure to toxic or hazardous substances.

Training shall take place before starting work on this project. New employees shall receive the complete training before starting work on this project. The Contractor shall have regular meetings to discuss and reinforce spill prevention and control; material delivery, storage, use, and disposal; waste management; and non-storm water management procedures.

Instructions for material and waste handling, storage, and spill reporting and cleanup shall be posted at all times in an open, conspicuous, and accessible location at the construction site.

Non-hazardous construction site waste and excess material shall be recycled when practical or disposed of in accordance with the provisions in Section 5-1.20B(4), "Contractor-Property Owner Agreement," of the Standard Specifications, unless otherwise specified.

Vehicles and equipment at the construction site shall be inspected on a frequent, predetermined schedule, and by the operator each day of use. Leaks shall be repaired immediately, or the vehicle or equipment shall be removed from the construction site.

#### 10-1.06.4.1 SPILL PREVENTION AND CONTROL

The Contractor shall implement spill and leak prevention procedures when chemicals or hazardous substances are stored. Spills of petroleum products; substances listed under CFR Title 40, Parts 110, 117, and 302; and sanitary and septic waste shall be contained and cleaned up as soon as is safe.

Minor spills involve small quantities of oil, gasoline, paint, or other material that can be controlled by the first responder upon discovery of the spill. Cleanup of minor spills includes:

- A. Containing the spread of the spill,
- B. Recovering the spilled material using absorption,
- C. Cleaning the contaminated area, and
- D. Disposing of contaminated material promptly and properly.

Semi-significant spills are those that can be controlled by the first responder with the help of other personnel. Cleanup of semi-significant spills shall be immediate. Cleanup of semi-significant spills includes:

- A. Containing the spread of the spill;
- B. Recovering the spilled material using absorption if the spill occurs on paved or an impermeable surface:
- Containing the spill with an earthen dike and digging up contaminated soil for disposal if the spill
  occurs on dirt;
- D. Covering the spill with plastic or other material to prevent contaminating runoff if the spill occurs during precipitation; and
- E. Disposing of contaminated material promptly and properly.

Significant or hazardous spills are those that cannot be controlled by construction personnel. Notifications of these spills shall be immediate. The following steps shall be taken:

- A. Construction personnel shall not attempt to cleanup the spill until qualified staff have arrived;
- B. Notify the Engineer and follow up with a written report;
- C. Obtain the services of a spills contractor or hazardous material team immediately;
- D. Notify the local emergency response team by dialing 911 and county officials at the emergency phone numbers kept on the construction site;
- E. Notify the Governor's Office of Emergency Services Warning Center at (805) 852-7550;
- F. Notify the National Response Center at (800) 424-8802 regarding spills of Federal reportable quantities in conformance with CFR Title 40, Parts 110, 119, and 302;
- G. Notify other agencies as appropriate, including:
- 1. Fire Department,
- 2. Public Works Department.
- 3. Highway Patrol,
- 4. City Police or County Sheriff Department,
- 5 Department of Toxic Substances,
- 6. California Division of Oil and Gas,
- 7. Cal OSHA, or
- 8. Regional Water Resources Control Board.

The contractor shall oversee and enforce proper spill prevention and control measures. Minor, semi-significant, and significant spills shall be reported to the contractor who shall notify the Engineer immediately.

The Contractor shall prevent spills from entering storm water runoff before and during cleanup. Spills shall not be buried or washed with water.

The Contractor shall keep material or waste storage areas clean, well organized, and equipped with enough cleanup supplies for the material being stored. Plastic shall be placed under paving equipment when not in use to catch drips.

#### 10-1.06.4.2 MATERIAL MANAGEMENT

Material shall be delivered, used, and stored for this contract in a manner that minimizes or eliminates discharge of material into the air, storm drain systems, or watercourses.

The Contractor shall implement the practices described in this section when taking delivery of, using, or storing the following materials:

### A. Hazardous chemicals including:

- 1. Acids.
- 2. Lime.
- 3. Glues.
- 4. Adhesives,
- 5. Paints,
- 6. Solvents, and
- 7. Curing compounds;
- B. Soil stabilizers and binders;
- C. Fertilizers;
- D. Detergents;
- E. Plaster;
- F. Petroleum products including:
  - 1. Fuel,
  - 2. Oil, and
  - 3. Grease;
- G. Asphalt components and concrete components; and
- H. Pesticides and herbicides.

The Contractor shall supply the Material Safety Data Sheet to the Engineer for material used or stored. The Contractor shall keep an accurate inventory of material delivered and stored at the construction site.

Employees trained in emergency spill cleanup procedures shall be present when hazardous materials or chemicals are unloaded.

The Contractor shall use recycled or less hazardous products when practical.

Application of herbicides and pesticides shall be performed by a licensed applicator. The Contractor shall complete the Report of Chemical Spray forms when spraying herbicides or pesticides, and shall submit a copy to the Engineer before application.

#### **Material Storage**

The Contractor shall store liquids, petroleum products, and substances listed in CFR Title 40, Parts 110, 117, and 302 in containers or drums approved by the United States Environmental Protection Agency, and place them in secondary containment facilities.

Secondary containment facilities shall be impervious to the materials stored there for a minimum contact time of 72 hours.

Throughout the rainy season secondary containment facilities shall be covered during non-working days and when precipitation is predicted. Secondary containment facilities shall be adequately ventilated.

The Contractor shall keep the secondary containment facility free of accumulated rainwater or spills. After precipitation, or in the event of spills or leaks, accumulated liquid shall be collected and placed into drums within 24 hours. These liquids shall be handled as hazardous waste in accordance with the provisions in "Hazardous Waste" of these Special Provisions, unless testing determines them to be non-hazardous.

Incompatible materials, such as chlorine and ammonia, shall not be stored in the same secondary containment facility.

Materials shall be stored in the original containers with the original product labels maintained in legible condition. Damaged or illegible labels shall be replaced immediately.

The secondary containment facility shall have the capacity to contain precipitation from a 24-hour-long, 25-year storm; and 10 percent of the aggregate volume of all containers, or all of the volume of the largest container within the facility, whichever is greater.

The Contractor shall store bagged or boxed material on pallets. Throughout the rainy season, bagged or boxed material shall be protected from wind and rain during non-working days and when precipitation is predicted.

The Contractor shall provide sufficient separation between stored containers to allow for spill cleanup or emergency response access. Storage areas shall be kept clean, well-organized, and equipped with cleanup supplies appropriate for the materials being stored.

The Contractor shall repair or replace perimeter controls, containment structures, covers, and liners as needed. Storage areas shall be inspected before and after precipitation, and at least weekly during other times.

# **Stockpile Management**

The Contractor shall reduce or eliminate potential air and water pollution from stockpiled material including soil, paving material, or pressure treated wood. Stockpiles shall be located out of floodplains when possible, and at least 50 feet from concentrated flows of storm water, drainage courses, or inlets unless written approval is obtained from the Engineer.

The Contractor may discontinue adding or removing material for up to 21 days and a stockpile will still be considered active.

The Contractor shall protect active stockpiles with plastic or geotextile cover, soil stabilization measures, or with linear sediment barrier when precipitation is predicted. Active stockpiles of cold mix asphalt concrete shall be placed on an impervious surface and covered with plastic when precipitation is predicted.

The Contractor shall protect inactive soil stockpiles with a plastic or geotextile cover, or with soil stabilization measures at all times during the rainy season. A linear sediment barrier around the perimeter of the stockpile shall also be used. During the non-rainy season soil stockpiles shall be covered and protected with a linear sediment barrier when precipitation is predicted. The Contractor shall control wind erosion during dry weather as provided in "Dust Control," of the Standard Specifications.

Stockpiles of Portland cement concrete rubble, asphalt concrete, asphalt concrete rubble, aggregate base, or aggregate sub-base shall be covered with plastic or geotextile, or protected with a linear sediment barrier at all times during the rainy season, and when precipitation is predicted during the non-rainy season.

Stockpiles of cold mix asphalt concrete shall be placed on and covered with impermeable material at all times during the rainy season, and when precipitation is predicted during the non-rainy season.

Stockpiles of pressure treated wood shall be covered with impermeable material and placed on pallets at all times during the rainy season, and when precipitation is predicted during the non-rainy season.

The Contractor shall repair or replace linear sediment barriers and covers as needed or as directed by the Engineer to keep them functioning properly. Sediment shall be removed when it accumulates to 1/3 of the linear sediment barrier height.

#### 10-1.06.4.3 WASTE MANAGEMENT

# Solid Waste

The Contractor shall not allow litter or debris to accumulate anywhere on the construction site, including storm drain grates, trash racks, and ditch lines. The Contractor shall pick up and remove trash and debris from the construction site at least once a week. The contractor shall monitor solid waste storage and disposal procedures on the construction site. The Contractor shall provide enough dumpsters of sufficient size to contain the solid waste generated by the project. Dumpsters shall be emptied when refuse reaches the fill line. Dumpsters shall be watertight. The Contractor shall not wash out dumpsters on the construction site. The Contractor shall provide additional containers and more frequent pickup during the demolition phase of construction

Solid waste includes:

- A. Brick,
- B. Mortar,
- C. Timber,
- D. Metal scraps,
- E. Sawdust,
- F. Pipe,
- G. Electrical cuttings,

- H. Non-hazardous equipment parts,
- I. Styrofoam and other packaging materials,
- J. Vegetative material and plant containers from highway planting, and
- K. Litter and smoking material, including litter generated randomly by the public.

Trash receptacles shall be provided and used in the Contractor's yard, field trailers, and locations where workers gather for lunch and breaks.

#### **Hazardous Waste**

The Contractor shall implement hazardous waste management practices when waste is generated on the construction site from the following substances:

- A. Petroleum products,
- B. Asphalt products,
- C. Concrete curing compound,
- D. Pesticides,
- E. Acids,
- F. Paints,
- G. Stains.
- H. Solvents.
- I. Wood preservatives,
- J. Roofing tar, and
- K. Materials classified as hazardous by California Code of Regulations, Title 22, Division 4.5; or listed in CFR Title 40, Parts 110, 117, 261, or 302.

Nothing in these Special Provisions shall relieve the Contractor of the responsibility for compliance with Federal, State, and local laws regarding storage, handling, transportation, and disposal of hazardous wastes.

The CONTRACTOR shall oversee and enforce hazardous waste management practices. Production of hazardous materials and hazardous waste on the construction site shall be kept to a minimum. Perimeter controls, containment structures, covers, and liners shall be repaired or replaced when damaged.

The Contractor shall have a laboratory certified by the California Department of Public Health (CDPH) sample and test waste when hazardous material levels are unknown to determine safe methods for storage and disposal.

The Contractor shall segregate potentially hazardous waste from non-hazardous waste at the construction site. Hazardous waste shall be handled, stored, and disposed of as required in California Code of Regulations, Title 22, Division 4.5, Section 66262.34; and in CFR Title 49, Parts 261, 262, and 263.

The Contractor shall store hazardous waste in sealed containers constructed and labeled with the contents and date accumulated as required in California Code of Regulations, Title 22, Division 4.5; and in CFR Title 49, Parts 172, 173, 178, and 179. Hazardous waste containers shall be kept in temporary containment facilities conforming to the provisions in "Material Storage" of these Special Provisions.

There shall be adequate storage volume and containers shall be conveniently located for hazardous waste collection. Containers of hazardous waste shall not be overfilled and hazardous wastes shall not be mixed. Containers of dry waste that are not watertight shall be stored on pallets. The Contractor shall not allow potentially hazardous waste to accumulate on the ground. Hazardous waste shall be stored away from storm drains, watercourses, moving vehicles, and equipment.

The Contractor shall clean water based or oil based paint from brushes or equipment within a contained area and shall not contaminate soil, watercourses, or storm drain systems. Paints, thinners, solvents, residues, and sludges that cannot be recycled or reused shall be disposed of as hazardous waste. When thoroughly dry, latex paint and paint cans, used brushes, rags, absorbent materials, and drop cloths shall be disposed of as solid waste.

The Contractor shall dispose of hazardous waste within 90 days of being generated. Hazardous waste shall be disposed of by a licensed hazardous waste transporter using uniform hazardous waste manifest forms and taken to a Class I Disposal Site. A copy of the manifest shall be provided to the Engineer.

#### **Contaminated Soil**

The Contractor shall identify contaminated soil from spills or leaks by noticing discoloration, odors, or differences in soil properties. Soil with evidence of contamination shall be sampled and tested by a laboratory certified by CDPH. If levels of contamination are found to be hazardous, the soil shall be handled and disposed of as hazardous waste.

The Contractor shall prevent the flow of water, including ground water, from mixing with contaminated soil by using one or a combination of the following measures:

- A. Berms,
- B. Cofferdams,
- C. Grout curtains.
- D. Freeze walls, or
- E. Concrete seal course.

If water mixes with contaminated soil and becomes contaminated, the water shall be sampled and tested by a laboratory certified by the CDPH. If levels of contamination are found to be hazardous, the water shall be handled and disposed of as hazardous waste.

#### Concrete Waste

The Contractor shall implement practices to prevent the discharge of Portland cement concrete or asphalt concrete waste into storm drain systems or watercourses.

Portland cement concrete or asphalt concrete waste shall be collected at the following locations and disposed of:

- A. Where concrete material, including grout, is used;
- B. Where concrete dust and debris result from demolition;
- C. Where sawcutting, coring, grinding, grooving, or hydro-concrete demolition of Portland cement concrete or asphalt concrete creates a residue or slurry; or
- D. Where concrete trucks or other concrete-coated equipment is cleaned at the construction site.

# Sanitary and Septic Waste

Wastewater from sanitary or septic systems shall not be discharged or buried within the Department right of way. The CONTRACTOR shall inspect sanitary or septic waste storage and monitor disposal procedures at least weekly. Sanitary facilities that discharge to the sanitary sewer system shall be properly connected and free from leaks.

The Contractor shall obtain written approval from the local health agency, city, county, and sewer district before discharging from a sanitary or septic system directly into a sanitary sewer system, and provide a copy to the Engineer. The Contractor shall comply with local health agency requirements when using an on-site disposal system.

# Liquid Waste

The Contractor shall not allow construction site liquid waste, including the following, to enter storm drain systems or watercourses:

- A. Drilling slurries or fluids,
- B. Grease-free or oil-free wastewater or rinse water,
- C. Dredgings,
- D. Liquid waste running off a surface including wash or rinse water, or
- E. Other non-storm water liquids not covered by separate permits.

The Contractor shall hold liquid waste in structurally sound, leak proof containers such as:

- Sediment traps,
- B. Roll-off bins, or
- C. Portable tanks.

Liquid waste containers shall be of sufficient quantity and volume to prevent spills and leaks. The containers shall be stored at least 50 feet from storm drains, watercourses, moving vehicles, and equipment.

The Contractor shall remove and dispose of deposited solids from sediment traps as provided in "Solid Waste" of these Special Provisions, unless determined infeasible by the Engineer.

Liquid waste may require testing to determine hazardous material content before disposal.

Drilling fluids and residue shall be disposed of outside the highway right of way. If the Engineer determines that an appropriate location is available, fluids and residue exempt under California Code of Regulations, Title 23, Section 2511(g) may be dried by infiltration and evaporation in a leak proof container. The remaining solid waste may be disposed of as provided in "Solid Waste" of these Special Provisions.

#### 10-1.06.4.4 NON-STORM WATER MANAGEMENT

#### **Water Control and Conservation**

The Contractor shall prevent erosion or the discharge of pollutants into storm drain systems or watercourses by managing the water used for construction operations. The Contractor shall obtain the Engineer's approval before washing anything on the construction site with water that could discharge into a storm drain system or watercourse. Discharges shall be reported to the Engineer immediately.

The Contractor shall implement water conservation practices when water is used on the construction site. Irrigation areas shall be inspected and watering schedules shall be adjusted to prevent erosion, excess watering, or runoff. The Contractor shall shut off the water source to broken lines, sprinklers, or valves, and they shall be repaired as soon as possible. When possible, water from waterline flushing shall be reused for landscape irrigation. Paved areas shall be swept and vacuumed, not washed with water.

Construction water runoff, including water from water line repair, shall be directed to areas to infiltrate into the ground and shall not be allowed to enter storm drain systems or watercourses. Spilled water shall not be allowed to escape water truck filling areas. When possible, the Contractor shall direct water from off-site sources around the construction site, or shall minimize contact with the construction site.

# Illegal Connection and Discharge Detection and Reporting

The Contractor shall inspect the construction site and the site perimeter before beginning work for evidence of illegal connections, discharges, or dumping. Subsequently, the construction site and perimeter shall be inspected on a frequent, predetermined schedule.

The Contractor shall immediately notify the Engineer when illegal connections, discharges, or dumping are discovered. The Contractor shall take no further action unless directed by the Engineer. Unlabeled or unidentifiable material shall be assumed to be hazardous.

The Contractor shall look for the following evidence of illegal connections, discharges, or dumping:

- A. Debris or trash piles,
- B. Staining or discoloration on pavement or soils,
- C. Pungent odors coming from drainage systems,
- D. Discoloration or oily sheen on water.
- E. Stains or residue in ditches, channels or drain boxes,
- F. Abnormal water flow during dry weather,
- G. Excessive sediment deposits,
- H. Nonstandard drainage junction structures, or
- I. Broken concrete or other disturbances near junction structures.

# Vehicle and Equipment Cleaning

The Contractor shall limit vehicle and equipment cleaning or washing on the construction site to that necessary to control vehicle tracking or hazardous waste. Vehicles and equipment shall not be cleaned on the construction site with soap, solvents, or steam until the Engineer has been notified. The resulting waste shall be contained and recycled, or disposed of as provided in "Liquid Waste" or "Hazardous Waste" of these Special Provisions, whichever is applicable. The Contractor shall not use diesel to clean vehicles or equipment, and shall minimize the use of solvents.

The Contractor shall clean or wash vehicles and equipment in a structure equipped with disposal facilities. If using a structure is not possible, vehicles and equipment shall be cleaned or washed in an outside area with the following characteristics:

- A. Located at least 50 feet from storm drainage systems or watercourses,
- B. Paved with asphalt concrete or Portland cement concrete,
- C. Surrounded by a containment berm, and
- D. Equipped with a sump to collect and dispose of wash water.

When washing vehicles or equipment with water, the Contractor shall use as little water as possible. Hoses shall be equipped with a positive shutoff valve.

Wash racks shall discharge to a recycle system or to another system approved by the Engineer. Sumps shall be inspected regularly, and liquids and sediments shall be removed as needed.

## Vehicle and Equipment Fueling and Maintenance

The Contractor shall fuel or perform maintenance on vehicles and equipment off the construction site whenever practical. When fueling or maintenance must be done at the construction site, the Contractor shall designate a site, or sites, and obtain approval from the Engineer before using. The fueling or maintenance site shall be protected from storm water, shall be on level ground, and shall be located at least 50 feet from drainage inlets or watercourses. The CONTRACTOR shall inspect the fueling or maintenance site regularly. Mobile fueling or maintenance shall be kept to a minimum.

The Contractor shall use containment berms or dikes around the fueling and maintenance area. Adequate amounts of absorbent spill cleanup material and spill kits shall be kept in the fueling and maintenance area and on fueling trucks. Spill cleanup material and kits shall be disposed of immediately after use. Drip pans or absorbent pads shall be used during fueling or maintenance unless performed over an impermeable surface.

Fueling or maintenance operations shall not be left unattended. Fueling nozzles shall be equipped with an automatic shutoff control. Vapor recovery fueling nozzles shall be used where required by the Air Quality Management District. Nozzles shall be secured upright when not in use. Fuel tanks shall not be topped-off.

The Contractor shall recycle or properly dispose of used batteries and tires.

## Material and Equipment Used Over Water

Drip pans and absorbent pads shall be placed under vehicles or equipment used over water, and an adequate supply of spill cleanup material shall be kept with the vehicle or equipment. Drip pans or plastic sheeting shall be placed under vehicles or equipment on docks, barges, or other surfaces over water when the vehicle or equipment will be idle for more than one hour.

The Contractor shall provide watertight curbs or toe boards on barges, platforms, docks, or other surfaces over water to contain material, debris, and tools. Material shall be secured to prevent spills or discharge into water due to wind.

## Structure Removal Over or Adjacent to Water

The Contractor shall not allow demolished material to enter storm water systems or watercourses. The Contractor shall use covers and platforms approved by the Engineer to collect debris. Attachments shall be used on equipment to catch debris on small demolition operations. Debris catching devices shall be emptied regularly and debris shall be handled as provided in "Waste Management" of these Special Provisions.

The CONTRACTOR shall inspect demolition sites within 50 feet of storm water systems or watercourses every day.

## Paving, Sealing, Sawcutting, and Grinding Operations

The Contractor shall prevent the following material from entering storm drain systems or water courses:

- A. Cementitious material,
- B. Asphaltic material,
- C. Aggregate or screenings,
- D. Grinding or sawcutting residue,
- E. Pavement chunks, or

# F. Shoulder backing.

The Contractor shall cover drainage inlets and use linear sediment barriers to protect downhill watercourses until paving, sealing, sawcutting, or grinding operations are completed and excess material has been removed. Drainage inlets and manholes shall be covered during the application of seal coat, tack coat, slurry seal, or fog seal.

During the rainy season or when precipitation is predicted, paving, sawcutting, and grinding operations shall be limited to places where runoff can be captured. Seal coat, tack coat, slurry seal, or fog seal operations shall not begin if precipitation is predicted for the application or the curing period. The Contractor shall not excavate material from existing roadways during precipitation.

The Contractor shall vacuum up slurry from sawcutting operations immediately after the slurry is produced. Slurry shall not be allowed to run onto lanes open to public traffic or off the pavement.

The Contractor shall collect residue from Portland cement concrete grinding operations with a vacuum attachment on the grinding machine. The residue shall not be left on the pavement or allowed to flow across the pavement.

Material excavated from existing roadways may be stockpiled as provided in "Stockpile Management" of these Special Provisions if approved by the Engineer. Asphalt concrete chunks used in embankment shall be placed above the water table and covered by at least one foot of material.

Substances used to coat asphalt trucks and equipment shall not contain soap, foaming agents, or toxic chemicals.

## **Thermoplastic Striping and Pavement Markers**

Thermoplastic striping and preheating equipment shutoff valves shall work properly at all times when on the construction site. The Contractor shall not preheat, transfer, or load thermoplastic within 50 feet of drainage inlets or watercourses. The Contractor shall not fill the preheating container to more than 6 inches from the top. Truck beds shall be cleaned daily of scraps or melted thermoplastic.

The Contractor shall not unload, transfer, or load bituminous material for pavement markers within 50 feet of drainage inlets or watercourses. All pressure shall be released from melting tanks before removing the lid to fill or service. Melting tanks shall not be filled to more than 6 inches from the top.

The Contractor shall collect bituminous material from the roadway after marker removal.

### Pile Driving

The Contractor shall keep spill kits and cleanup material at pile driving locations. Pile driving equipment shall be parked over drip pans, absorbent pads, or plastic sheeting where possible. When not in use, pile driving equipment shall be stored at least 50 feet from concentrated flows of storm water, drainage courses, or inlets. The Contractor shall protect pile driving equipment by parking it on plywood and covering it with plastic when precipitation is predicted. The CONTRACTOR shall inspect the pile driving area every day for leaks and spills.

The Contractor shall use vegetable oil instead of hydraulic fluid when practical.

## **Concrete Curing**

The Contractor shall not overspray chemical curing compound. Drift shall be minimized by spraying as close to the concrete as possible. Drainage inlets shall be covered before applying curing compound.

The Contractor shall minimize the use and discharge of water by using wet blankets or similar methods to maintain moisture when curing concrete.

### **Concrete Finishing**

The Contractor shall collect and dispose of water and solid waste from high-pressure water blasting. Drainage inlets within 50 feet shall be covered before sandblasting. The nozzle shall be kept as close to the surface of the concrete as possible to minimize drift of dust and blast material. Blast residue may contain hazardous material.

Containment structures for concrete finishing operations shall be inspected for damage before each day of use and before predicted precipitation. Liquid and solid waste shall be removed from the containment structure after each work shift.

### 10-1.06.4.5 PAYMENT

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in spill prevention and control, material management, waste management, non-storm water management, and dewatering and identifying, sampling, testing, handling, and disposing of hazardous waste, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.06.5 TEMPORARY CONCRETE WASHOUT FACILITY

Temporary concrete washout facilities shall be constructed, maintained, and later removed at the locations shown on the approved Storm Water Pollution Prevention Plan in conformance with "Water Pollution Control" of these Special Provisions, and in conformance with details shown on the plans and these Special Provisions.

Temporary concrete washout facilities shall be one of the water pollution control practices for waste management and materials pollution control. The Storm Water Pollution Prevention Plan shall include the use of temporary concrete washout facilities.

### 10-1.06.5.1 MATERIALS

#### **Plastic Liner**

Plastic liners shall be single ply, new polyethylene sheeting, a minimum of 10 mils thick and shall be free of holes, punctures, tears or other defects that compromise the impermeability of the material. Plastic liners shall not have seams or overlapping joints.

### **Gravel-filled Bags**

Gravel bag fabric shall be non-woven polypropylene geotextile (or comparable polymer) and shall conform to the following requirements:

Specification	Requirements	
Weight per unit area, ounces per square yard, min.	8.0	
ASTM Designation: D 5261		
Grab tensile strength (one inch grip), kilonewtons, min.	205	
ASTM Designation: D 4632*		
Ultraviolet stability, percent tensile strength retained after 500	70	
hours,		
ASTM Designation: D 4355, xenon arc lamp method		

<sup>\*</sup> or appropriate test method for specific polymer

Gravel bags shall be between 24 inches and 32 inches in length, and between 16 inches and 20 inches in width

Yarn used for binding gravel bags shall be as recommended by the manufacturer or bag supplier and shall be of a contrasting color.

Gravel shall be between 3/8 inch and 3/4 inch in diameter, and shall be clean and free from clay balls, organic matter, and other deleterious materials.

The opening of gravel-filled bags shall be secured to prevent gravel from escaping. Gravel-filled bags shall be between 30 pounds and 50 pounds in weight.

#### **Straw Bales**

Straw for straw bales shall conform to the provisions in Section 13-10.02H, "Straw Bales," of the Standard Specifications.

Straw bales shall be a minimum of 14 inches in width, 18 inches in height, 36 inches in length and shall have a minimum weight of 50 pounds. The straw bale shall be composed entirely of vegetative matter, except for binding material.

Straw bales shall be bound by either wire, nylon or polypropylene string. Jute or cotton binding shall not be used. Baling wire shall be a minimum of 16 gage in diameter. Nylon or polypropylene string shall be approximately 0.08-inch in diameter with 80 pounds of breaking strength.

### Stakes

Stakes shall be wood or metal. Wood stakes shall be untreated fir, redwood, cedar, or pine and cut from sound timber. They shall be straight and free of loose or unsound knots or other defects which would render

them unfit for the purpose intended. Wood stakes shall be a minimum 2" x 2" in size. Metal stakes may be used as an alternative, and shall be a minimum of 0.5-inch in diameter. Stakes shall be a minimum of 4 feet in length. The tops of the metal stakes shall be bent at a 90-degree angle or capped with an orange or red plastic safety cap that fits snugly to the metal stake. The Contractor shall submit a sample of the metal stake and plastic cap, if used, for the Engineer's approval prior to installation.

### **Staples**

Staples shall be as shown on the plans. An alternative attachment device such as geotextile pins or plastic pegs may be used instead of staples. The Contractor shall submit a sample of the alternative attachment device for the Engineer's approval prior to installation.

### Signs

Wood posts for signs shall conform to the provisions in "Wood Posts," of the Standard Specifications. Lag screws shall conform to the provisions in "Sign Panel Fastening and Mounting Hardware," of the Standard Specifications.

Plywood shall be freshly painted for each installation with not less than 2 applications of flat white paint. Sign letters shown on the plans shall be stenciled with commercial quality exterior black paint. Testing of paint will not be required.

### 10-1.06.5.2 INSTALLATION

Temporary concrete washout facilities shall be as follows:

- A. Temporary concrete washout facilities shall be installed prior to beginning placement of concrete and located a minimum of 50 feet from storm drain inlets, open drainage facilities, and water courses unless determined infeasible by the Engineer. Temporary concrete washout facilities shall be located away from construction traffic or access areas at a location determined by the Contractor and approved by the Engineer.
- B. A sign shall be installed adjacent to each washout facility at a location determined by the Contractor and approved by the Engineer. Signs shall be installed in conformance with the provisions in "Construction," and "Sign Panel Installation," of the Standard Specifications.
- C. The length and width of a temporary concrete washout facility may be increased from the minimum dimensions shown on the plans, at the Contractor's expense and upon approval of the Engineer.
- D. Temporary concrete washout facilities shall be constructed in sufficient quantity and size to contain liquid and concrete waste generated by washout operations for concrete wastes. These facilities shall be constructed to contain liquid and concrete waste without seepage, spills, or overflow.
- E. Berms for below grade temporary concrete washout facilities shall be constructed from compacted native material. Gravel may be used in conjunction with compacted native material.
- F. A plastic liner shall be installed in below grade temporary concrete washout facilities.

Details for an alternative temporary concrete washout facility shall be submitted to the Engineer for approval at least 7 days prior to installation.

Temporary concrete washout facilities shall be disposed of in conformance with the provisions in Section 13-9, "Temporary Concrete Washouts," of the Standard Specifications.

Ground disturbance, including holes and depressions, caused by the installation and removal of the temporary concrete washout facilities shall be backfilled and repaired in conformance with the provisions in Section 15, "Existing Facilities," of the Standard Specifications.

## **10-1.06.5.3 MAINTENANCE**

Temporary concrete washout facilities shall be maintained to provide adequate holding capacity with a minimum freeboard of 12 inches. Maintaining temporary concrete washout facilities shall include removing and disposing of hardened concrete and returning the facilities to a functional condition. Hardened concrete materials shall be removed and disposed of in conformance with the provisions in Section 13-9, "Temporary Concrete Washouts," of the Standard Specifications. Holes, rips, and voids in the plastic liner shall be patched and repaired by taping or the plastic liner shall be replaced. The plastic liner shall be replaced when patches or repairs compromise the impermeability of the material as determined by the Engineer.

Gravel bags shall be replaced when the bag material is ruptured or when the yarn has failed, allowing the bag contents to spill out.

Temporary concrete washout facilities shall be repaired or replaced on the same day the damage occurs. Damage to temporary concrete washout facilities resulting from the Contractor's vehicles, equipment, or operations shall be repaired at the Contractor's expense.

### 10-1.06.5.4 PAYMENT

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in constructing a temporary concrete washout facility, complete in place, including excavation and backfill, maintenance, and removal, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.07 PROPERTY AND FACILITY PRESERVATION

Attention is directed to Section 5-1.36 "Property and Facility Preservation," of the Standard Specifications and these Special Provisions.

Existing utilities and facilities shall be preserved and protected from damage by the Contractor. An effort has been made to show existing surface and underground structures on the plans, however not all infrastructure may be shown and infrastructure locations may be in different locations from those described. The Contractor is responsible for contacting all agencies and utility owners to verify the location of underground infrastructure prior to and during construction.

The Contractor shall be responsible to repair, restore, replace and stabilize, as closely as possible to existing condition any facilities, landscaping, or any other improvements, that are disturbed as a result of accessing or repairing the sewer lines or performing work associated with this contract.

Before starting any work that could damage or interfere with underground infrastructure, the Contractor shall pothole and locate existing infrastructure, including laterals and appurtenances, and shall determine the presence of other underground infrastructure inferred from visible facilities such as buildings, meters and junction boxes. Existing infrastructure damaged due to negligence of the Contractor shall be completely repaired at the Contractor's expense and in coordination with the effected utility owner.

The Contractor shall accurately tie off and record the location of all utility covers, cleanouts, pull boxes and manholes to be lowered or temporarily overlaid prior to raising to grade. A copy of said record shall be provided to the Engineer prior to resurfacing the street.

Existing trees, shrubs and other plants, that are not to be removed as shown on the plans or specified in these Special Provisions, and are injured or damaged by reason of the Contractor's operations, shall be replaced by the Contractor. The minimum size of tree replacement shall be 24 inch box and the minimum size of shrub replacement shall be No. 15 container {15-gallon}. Replacement ground cover plants shall be from flats and shall be planted 12 inches on center. Replacement of Carpobrotus ground cover plants shall be from cuttings and shall be planted 12 inches on center. Replacement planting shall conform to the requirements in "Replacement Plants," of the Standard Specifications. The Contractor shall water replacement plants in conformance with the provisions in "Watering," of the Standard Specifications.

Damaged or injured plants shall be removed and disposed of outside the highway right of way in conformance with the provisions in 5-1.20B(4), "Contractor-Property Owner Agreement," of the Standard Specifications. At the option of the Contractor, removed trees and shrubs may be reduced to chips. The chipped material shall be spread within the highway right of way at locations designated by the Engineer.

Replacement planting of injured or damaged trees, shrubs, and other plants shall be completed prior to the start of the plant establishment period. Replacement planting shall conform to the provisions in Section 20-7, "Highway Planting," of the Standard Specifications.

Replacement planting of injured or damaged trees, shrubs and other plants shall be completed not less than 20 working days prior to acceptance of the contract. Replacement plants shall be watered as necessary to maintain the plants in a healthy condition.

Survey monuments and markers shown on the plans or encountered within the project limits shall be protected from damage by the Contractor. The Contractor shall notify the Engineer of monuments encountered and shall not remove or disturb said monument until the monument can be cross-referenced and tied out by a licensed surveyor. The Contractor shall allow a minimum of one working day for such referencing to be accomplished. When notified by the Engineer that the ties have been completed, the monument or marker can then be removed. The Contractor is not responsible for the replacement of any monument or marker of which the removal is necessitated by the work performed and which has been referenced and tied. If through negligence or carelessness on the part of the Contractor, notification is not made as provided above, markers are removed, or disturbed which are not in direct conflict with the construction, the Contractor shall be responsible for the

cost of referencing, resurveying, and replacement of the monument or marker. Such sums for the replacement shall be deducted from the final contract payment.

Full compensation for conforming to the provisions of this section shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.08 COOPERATION

Attention is directed to Section 5-1.09, "Partnering," and Section 5-1.20, "Coordination with Other Entities," of the Standard Specifications and these Special Provisions. Attention is also directed to "General Requirements" of these Special Provisions.

Following is a list of some, but not necessarily all, of the utility companies that may have facilities in the project area:

Utility Company	Contact Person	Telephone Number
Pacific Gas & Electric	Lee Wells	530-477-3260
AT&T	Astrid Willard	916-484-2388
Comcast Cable	Justin Haggin	530-790-3369
City of Grass Valley – Sewer/Water/Storm Drain	Public Works Department	530-274-4350

The Contractor shall coordinate with Pacific Gas and Electric Company for the removal, relocation, repair, or disturbance of any gas or electric facilities caused by project work.

The Contractor shall coordinate with the AT&T for the removal, relocation, repair, or disturbance of any telecommunications facilities caused by project work.

The Contractor shall coordinate with the Comcast Cable for the removal, relocation, repair, or disturbance of any cable television facilities caused by project work.

The Contractor shall coordinate with the City of Grass Valley for the removal, relocation, repair, or disturbance of any water, sewer storm drain facilities caused by project work.

Any utilities not listed above or damaged by the Contractor during the course of project work shall be repaired or replaced in cooperation with the affected utility company.

The Contractor shall provide sufficient notification to the affected utility company to allow time for scheduling and completion of the required work. Any delays resulting from the Contractor's failure to properly notify or schedule utility company work shall be at the Contractor's expense.

Full compensation for conforming to the provisions of this section shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.09 PROGRESS SCHEDULE

Progress schedules are required for this contract and shall be submitted in conformance with the provisions in Section 8-1.02, "Schedule," of the Standard Specifications and these Special Provisions. The Contractor shall notify the Engineer on a daily basis of the areas of work scheduled for the following day.

The Contractor shall submit to the Engineer a practicable "Critical Path Method" progress schedule within 10 working days of approval of the contract, and within 10 working days of the Engineer's written request at any other time.

The progress schedule shall follow the general order of work detailed in "General Requirements," of these Special Provisions, and shall meet the milestones listed in "Beginning of Work, Time of Completion, and Liquidated Damages," of these Special Provisions.

Full compensation for conforming to the provisions of this section shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.10 OBSTRUCTIONS

Attention is directed to Section 5-1.20, "Coordination with Other Entities," of the Standard Specifications and of these Special Provisions.

Attention is directed to the existence of certain underground facilities that may require special precautions be taken by the Contractor to protect the health, safety and welfare of workers and of the public. Facilities requiring special precautions include, but are not limited to: natural gas in pipelines underground electric supply system conductors or cables, with potential to ground of more than 300 V, either directly buried or in a duct or conduit which do not have concentric grounded or other effectively grounded metal shields or sheaths, water mains, gravity sanitary sewer lines, and telephone conduits.

The Contractor shall notify the Engineer and the appropriate regional notification center for operators of subsurface installations at least 2 working days, but not more than 14 calendar days, prior to performing any excavation or other work close to any underground pipeline, conduit, duct, wire or other structure. Regional notification centers include, but are not limited to, the following:

Notification Center	Telephone Number
Underground Service Alert – Northern California (USA)	1-800-227-2600

The Contractor is hereby notified that prior to commencing construction, he is responsible for contacting all utility companies for verification at the construction site of the locations of all underground facilities that may conflict with the placement of the improvements shown on the plans. Where potential conflict exists, the Contractor shall pothole existing utilities to determine their elevation. Call "Underground Service Alert" at 800-227-2600 forty-eight (48) hours before any excavation is started.

Full compensation for conforming to the provisions of this section, including exposing existing utilities, and any potholing, not otherwise provided for, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.11 DUST CONTROL

Dust control shall conform to the provisions in "Dust Control," of the Standard Specifications and these Special Provisions.

Full compensation for conforming to the provisions of this section shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.12 MOBILIZATION

Mobilization shall conform to the provisions in the Standard Specifications and these Special Provisions.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all work involved in "Mobilization," including but not limited to the movement of personnel, equipment, supplies and incidentals to the project site shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.13 CONSTRUCTION AREA TRAFFIC CONTROL DEVICES

Flagging, signs, and temporary traffic control devices furnished, installed, maintained, and removed when no longer required shall conform to the provisions in Section 12, "Temporary Traffic Control," of the Standard Specifications and these Special Provisions.

Category 1 temporary traffic control devices are defined as small and lightweight (less than 100 pounds) devices. These devices shall be certified as crashworthy by crash testing, crash testing of similar devices, or years of demonstrable safe performance. Category 1 temporary traffic control devices include traffic cones, plastic drums, portable delineators, and channelizers.

If requested by the Engineer, the Contractor shall provide written self-certification for crashworthiness of Category 1 temporary traffic control devices at least 5 days before beginning any work using the devices or within 2 days after the request if the devices are already in use. Self-certification shall be provided by the manufacturer or Contractor and shall include the following:

- A. Date,
- B. Federal Aid number (if applicable),
- C. Contract number, district, county, route and post mile of project limits,
- D. Company name of certifying vendor, street address, city, state and zip code,
- E. Printed name, signature and title of certifying person; and
- F. Category 1 temporary traffic control devices that will be used on the project.

The Contractor may obtain a standard form for self-certification from the Engineer.

Category 2 temporary traffic control devices are defined as small and lightweight (less than 100 pounds) devices that are not expected to produce significant vehicular velocity change, but may cause potential harm to impacting vehicles. Category 2 temporary traffic control devices include barricades and portable sign supports.

Category 2 temporary traffic control devices shall be on the Federal Highway Administration's (FHWA) list of Acceptable Crashworthy Category 2 Hardware for Work Zones. This list is maintained by FHWA and can be located at:

http://safety.fhwa.dot.gov/roadway\_dept/road\_hardware/listing.cfm?code=workzone.

The Department also maintains this list at:

http://www.dot.ca.gov/hg/traffops/signtech/signdel/pdf/Category2.pdf.

Category 2 temporary traffic control devices that have not received FHWA acceptance shall not be used. Category 2 temporary traffic control devices in use that have received FHWA acceptance shall be labeled with the FHWA acceptance letter number and the name of the manufacturer. The label shall be readable and permanently affixed by the manufacturer. Category 2 temporary traffic control devices without a label shall not be used.

If requested by the Engineer, the Contractor shall provide a written list of Category 2 temporary traffic control devices to be used on the project at least 5 days before beginning any work using the devices or within 2 days after the request if the devices are already in use.

Category 3 temporary traffic control devices consist of temporary traffic-handling equipment and devices that weigh 100 pounds or more and are expected to produce significant vehicular velocity change to impacting vehicles. Temporary traffic-handling equipment and devices include crash cushions, truck-mounted attenuators, temporary railing, temporary barrier, and end treatments for temporary railing and barrier.

Type III barricades may be used as sign supports if the barricades have been successfully crash tested, meeting the NCHRP Report 350 criteria, as one unit with a construction area sign attached.

Category 3 temporary traffic control devices shall be shown on the plans or on the Department's Highway Safety Features list. This list is maintained by the Division of Engineering Services and can be found at: http://www.dot.ca.gov/hq/esc/approved products list/HighwaySafe.htm.

Category 3 temporary traffic control devices that are not shown on the plans or not listed on the Department's Highway Safety Features list shall not be used.

Full compensation for providing self-certification for crashworthiness of Category 1 temporary traffic control devices and for providing a list of Category 2 temporary traffic control devices used on the project shall be considered as included in the prices paid for the various Contract items of work requiring the use of the Category 1 or Category 2 temporary traffic control devices and no additional compensation will be allowed.

#### 10-1.14 CONSTRUCTION AREA SIGNS

Construction Area Signs shall be furnished, installed, maintained, and removed when no longer required in conformance with the provisions in Section 12, "Temporary Traffic Control," of the Standard Specifications and these Special Provisions.

Attention is directed to the provisions in "Pre-qualified and Tested Signing and Delineation Materials" of these Special Provisions. Type II retroreflective sheeting shall not be used on construction area sign panels. Type III, IV, VII, VIII, or IX retroreflective sheeting shall be used for stationary mounted construction area sign panels.

Orange background on construction area signs shall be fluorescent orange.

Repair to construction area sign panels will not be allowed, except when approved by the Engineer. At nighttime under vehicular headlight illumination, sign panels that exhibit irregular luminance, shadowing or dark blotches shall be immediately replaced at the Contractor's expense.

The Contractor shall notify the appropriate regional notification center for operators of subsurface installations at least 2 working days, but not more than 14 calendar days, prior to commencing excavation for construction area sign posts. The regional notification centers include, but are not limited to, the following:

Notification Center	Telephone Number
Underground Service Alert – Northern California (USA)	(800) 642-2444
<u> </u>	(800) 227-2600

Excavations required to install construction area signs shall be performed by hand methods without the use of power equipment, except that power equipment may be used if it is determined there are no utility facilities in the area of the proposed post holes. The post hole diameter, if backfilled with Portland cement concrete, shall be at least 4 inches greater than the longer dimension of the post cross section.

Construction area signs placed within 15 feet from the edge of the travel way shall be mounted on stationary mounted sign supports as specified in "Construction Area Traffic Control Devices" of these Special Provisions.

The Contractor shall maintain accurate information on construction area signs. Signs that are no longer required shall be immediately covered or removed. Signs that convey inaccurate information shall be immediately replaced or the information shall be corrected. Covers shall be replaced when they no longer cover the signs properly. The Contractor shall immediately restore to the original position and location any sign that is displaced or overturned, from any cause, during the progress of work.

The Contractor may be required to cover certain signs during the progress of the work. Signs that are no longer required or that convey inaccurate information to the public shall be immediately covered or removed or the information shall be corrected. Covers for construction area signs shall be of sufficient size and density to completely block out the complete face of the signs. The reflective face of the covered signs shall not be visible either during the day or at night. Covers shall be fastened securely so that the signs remain covered during inclement weather. Covers shall be replaced when they no longer cover the signs properly.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in furnishing construction area signs required for the direction of public traffic through or around the work and for erecting or placing, maintaining (including covering and uncovering as needed) and, when no longer required, removing construction

area signs, as shown on the Contractor's accepted Traffic Control Plan, or as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be mad.

### 10-1.15 TEMPORARY OBJECT MARKERS

Object markers shall be stationary mounted on wood or metal posts in conformance with the details shown on the plans and the provisions in "Markings," of the Standard Specifications.

Marker panels for Type P object markers shall conform to the provisions for sign panels for stationary mounted signs.

Full compensation for furnishing, placing, maintaining, and removing temporary object markers, including but not limited to for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in Temporary Object Markers, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, as required per the Contractor's accepted Traffic Control Plan, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.16 MAINTAINING TRAFFIC

Attention is directed to Sections 7-1.03, "Public Convenience," 7-1.04, "Public Safety," and 12, "Temporary Traffic Control," of the Standard Specifications and these Special Provisions. Nothing in these Special Provisions shall be construed as relieving the Contractor from the responsibilities specified in Section 7-1.04, "Public Safety."

Lane closures shall conform to the provisions in "Closure Requirements and Conditions," and "Traffic Control System" of these Special Provisions.

The full width of the travel way shall remain open for public use at all times unless otherwise specified in these Special Provisions or approved by the City Engineer.

Construction activity requiring lane closures shall conform to the following restrictions;

- The travel way of main arterial and collector streets, including West and East Main St, South Auburn St, Mill St and Neal St, may be reduced to one 11 foot lane of traffic in both directions between the hours of 6:00am to 9:00pm, as necessary and subject to the approval of the Engineer.
- The travel way of main arterial and collector streets, including West and East Main St, South Auburn St, Mill St and Neal St, may be reduced to one 11 foot lane of traffic with two way stop control between the hours of 9:00pm to 6:00am, as necessary and subject to the approval of the Engineer.

Five days advance notice shall be given to all residents, businesses and local authorities prior to beginning work involving full street closures and/or closures to one lane. The Contractor shall accommodate any special needs that arise that may require ingress and egress to a property.

The Contractor may request day and/or weekend hours of work, which do not significantly change the cost of the work may be permitted upon the written request of the Contractor if, in the opinion of the Engineer, public traffic will be better served and the work expedited. These deviations shall not be adopted by the Contractor until the Engineer has approved them in writing. All other modifications will be made by contract change order.

The Contractor shall provide access to parking lots, driveways, residences and businesses at all times unless otherwise specified in these Special Provisions or approved by the City Engineer. Access to parking lots, driveways, and businesses within the project area shall be detailed in the Contractor's Traffic Control Plan for review and acceptance by the Engineer. Five days advance notice shall be given to all residents, businesses and local authorities prior to beginning work involving temporary closures to driveways or parking lots.

Personal vehicles of the Contractor's employees shall not be parked on the traveled way or shoulders, including any section closed to public traffic.

The Contractor shall notify local authorities of the Contractor's intent to begin work at least 7 days before work is begun. The Contractor shall cooperate with local authorities relative to handling traffic through the area and shall make arrangements relative to keeping the working area clear of parked vehicles.

Whenever work vehicles or equipment are parked on the shoulder within 6 feet of a traffic lane, the shoulder area shall be closed with fluorescent orange traffic cones or portable delineators placed on a taper in advance of the parked vehicles or equipment and along the edge of the pavement at 25-foot intervals to a point not less than 25 feet past the last vehicle or piece of equipment. A minimum of 9 traffic cones or portable delineators shall be used for the taper. A W20-1 (ROAD WORK AHEAD) or W21-5b (RIGHT/LEFT SHOULDER CLOSED AHEAD) or C24(CA) (SHOULDER WORK AHEAD) sign shall be mounted on a portable sign stand with flags. The sign shall be placed where designated by the Engineer and/or as required as part of the Contractor's accepted Traffic Control Plan. The sign shall be a minimum of 48" x 48" in size. The Contractor shall immediately restore to the original position and location a traffic cone or delineator that is displaced or overturned, during the progress of work.

Minor deviations from the requirements of this section concerning hours of work which do not significantly change the cost of the work may be permitted upon the written request of the Contractor if, in the opinion of the Engineer, public traffic

will be better served and the work expedited. These deviations shall not be adopted by the Contractor until the Engineer has approved them in writing. All other modifications will be made by contract change order.

When traffic cones or delineators are used to delineate a temporary edge of traffic lane, the line of cones or delineators shall be considered to be the edge of the traffic lane. The lane closure provisions of this section shall not apply if the work area is protected by a temporary railing or barrier.

Pedestrian and bicycle access facilities shall be provided through construction areas within the right of way, unless otherwise approved by the Engineer, and included in the Contractor's Traffic Control Plan for review and acceptance by the Engineer.

Full compensation for furnishing all signs, pedestrian and bicycle access facilities, posting signs, detours, lane closures, materials, tools, equipment, and incidentals and for doing all work involved in "Maintaining Traffic", including flagging, complete in place as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.17 CLOSURE REQUIREMENTS AND CONDITIONS

Lane closures shall conform to the provisions in "Maintaining Traffic" of the Standard Specifications and these Special Provisions.

The term closure, as used herein, is defined as the closure of a traffic lane or lanes, including ramp or connector lanes, within a single traffic control system.

### 10-1.17.1 CLOSURE SCHEDULE

By noon Monday, the Contractor shall submit a written schedule of planned closures for the following week period, defined as Friday noon through the following Friday noon.

The Closure Schedule shall show the locations and times when the proposed closures are to be in effect. The Contractor shall submit the Closure Schedule request in a form acceptable to the City for approval. Closure Schedules submitted to the Engineer with incomplete, unintelligible or inaccurate information will be returned for correction and resubmittal. The Contractor will be notified of disapproved closures or closures that require coordination with other parties as a condition of approval.

Amendments to the Closure Schedule, including adding additional closures, shall be submitted to the Engineer, in writing, at least 3 working days in advance of a planned closure. Approval of amendments to the Closure Schedule will be at the discretion of the Engineer.

The Contractor shall confirm, in writing, all scheduled closures by no later than 8:00 a.m. 3 working days prior to the date on which the closure is to be made. Approval or denial of scheduled closures will be made no later than 4:00 p.m. 2 working days prior to the date on which the closure is to be made. Closures not confirmed or approved will not be allowed.

Confirmed closures that are cancelled due to unsuitable weather may be rescheduled at the discretion of the Engineer for the following working day.

### 10-1.17.2 CONTINGENCY PLAN

The Contractor shall prepare a contingency plan for reopening closures to public traffic. The Contractor shall submit the contingency plan for a given operation to the Engineer within one working day of the Engineer's request.

## 10-1.17.3 LATE REOPENING OF CLOSURES

If a closure is not reopened to public traffic by the specified time, work shall be suspended in conformance with the provisions in Section 8-1.06, "Suspensions," of the Standard Specifications. The Contractor shall not make any further closures until the Engineer has accepted a work plan, submitted by the Contractor, that will insure that future closures will be reopened to public traffic at the specified time. The Engineer will have 2 working days to accept or reject the Contractor's proposed work plan. The Contractor will not be entitled to any compensation for the suspension of work resulting from the late reopening of closures.

For each 30-minute interval, or fraction thereof past the time specified to reopen the closure, the City will deduct \$200 per interval from moneys due or that may become due the Contractor under the Contract.

### **10-1.17.4 PAYMENT**

The Contractor shall notify the Engineer of any delay in the Contractor's operations due to the following conditions, and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of those conditions, and the Contractor's loss due to that delay could not have been avoided by rescheduling the affected closure or by judicious handling of forces, equipment and plant, time or payment

adjustments shall be determined in conformance with the provisions in Section 8-1.07 "Delays" of the Standard Specifications:

- A. The Contractor's proposed Closure Schedule is denied and his planned closures are within the time frame allowed for closures in "Maintaining Traffic" of these Special Provisions, except that the Contractor will not be entitled to any compensation for amendments to the Closure Schedule that are not approved.
- B. The Contractor is denied a confirmed closure.

Should the Engineer direct the Contractor to remove a closure prior to the time designated in the approved Closure Schedule, any delay to the Contractor's schedule due to removal of the closure will be considered a delay and time or payment adjustments shall be determined in conformance with the provisions in Section 8-1.07 "Delays" of the Standard Specifications.

Full compensation for conforming to the provisions of this section shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.18 TRAFFIC CONTROL SYSTEM

A traffic control system shall consist of closing traffic lanes in conformance with the details shown on the plans, the provisions in Section 12, "Temporary Traffic Control," of the Standard Specifications, the provisions in "Maintaining Traffic," "Closure Requirements and Conditions," and "Construction Area Signs," of these Special Provisions.

The provisions in this section will not relieve the Contractor from the responsibility to provide additional devices or take measures as may be necessary to comply with the provisions in Section 7-1.04, "Public Safety," of the Standard Specifications.

Any existing traffic stripes, pavement marking and pavement markers that are obliterated or removed by the Contractor or as directed by the Engineer shall be reinstalled by the Contractor before the completion of this project. Any conflicting markings shall be completely removed as identifiable pavement markings under daylight or at night, wet or dry conditions.

If components in the traffic control system are displaced or cease to operate or function as specified, from any cause, during the progress of the work, the Contractor shall immediately repair the components to the original condition or replace the components and shall restore the components to the original location.

During traffic stripe operations and pavement marker placement operations using bituminous adhesive, traffic shall be controlled, at the option of the Contractor, with either stationary or moving lane closures. During other operations, traffic shall be controlled with stationary lane closures.

STATIONARY TYPE LANE CLOSURE: When lane closures are made for work periods only, at the end of each work period, components of the traffic control system, except portable delineators placed along open trenches or excavation adjacent to the traveled way, shall be removed from the traveled way and shoulder. If the Contractor so elects, the components may be stored at selected central locations designated by the Engineer within the limits of the highway right of way

Each vehicle used to place, maintain, and remove components of a traffic control system on multi lane highways shall be equipped with a Type II flashing arrow sign and radios which shall be in operation when the vehicle is being used for placing, maintaining, or removing the components. Vehicles equipped with Type II flashing arrow sign not involved in placing, maintaining, or removing the components when operated within a stationary type lane closure shall only display the caution display mode. The sign shall be controllable by the operator of the vehicle while the vehicle is in motion. The flashing arrow sign shown on the plans shall not be used on the vehicles which are doing the placing, maintaining, and removing of components of a traffic control system, and shall be in place before a lane closure requiring its use is completed.

When flaggers are required, they shall have radios and be in contact with personnel in the work area.

One-way traffic shall be controlled through the project in conformance with the Caltrans Standard Plan T-13, "Traffic Control System for Lane Closure on Two Lane Conventional Highways" and these Special Provisions.

MOVING LANE CLOSURE: Flashing arrow signs used in moving lane closures shall be truck-mounted. Changeable message signs used in moving lane closure operations shall conform to the provisions in "Portable Changeable Message Signs," of the Standard Specifications, except the signs shall be truck-mounted and the full operation height of the bottom of the sign may be less than 7 feet above the ground, but should be as high as practicable.

Flashing arrow signs shall be in the caution display mode when used on 2-lane, 2-way highways.

Truck-mounted attenuators (TMA) for use in moving lane closures shall be any of the following approved models, or equal:

A. Hexfoam TMA Series 3000, Alpha 1000 TMA Series 1000 and Alpha 2001 TMA Series 2001, manufactured by Energy Absorption Systems, Inc., One East Wacker Drive, Chicago, IL 60601-2076, telephone (312) 467-6750

- 1. Distributor (northern): Traffic Control Service, Inc., 8585 Thys Court, Sacramento, CA 95828, telephone (800) 884-8274, FAX (916) 387-9734
- 2. Distributor (southern): Traffic Control Service, Inc., 1881 Betmor Lane, Anaheim, CA 92805, telephone (800) 222-8274
- B. Cal T-001 Model 2 or Model 3, manufacturer and distributor: Hexcel Corporation, 11711 Dublin Boulevard, P.O. Box 2312, Dublin, CA 94568, telephone (925) 551-4900
- C. Renco Rengard Model Nos. CAM 8-815 and RAM 8-815, manufacturer and distributor: Renco Inc., 1582 Pflugerville Loop Road, P.O. Box 730, Pflugerville, TX 78660-0730, telephone (800) 654-8182

Each TMA shall be individually identified with the manufacturer's name, address, TMA model number, and a specific serial number. The names and numbers shall each be a minimum ½ inch high and located on the left (street) side at the lower front corner. The TMA shall have a message next to the name and model number in ½ inch high letters which states, "The bottom of this TMA shall be \_\_\_\_\_ inches ± \_\_\_\_ inch above the ground at all points for proper impact performance." Any TMA which is damaged or appears to be in poor condition shall not be used unless recertified by the manufacturer. The Engineer shall be the sole judge as to whether used TMAs supplied under this contract need recertification. Each unit shall be certified by the manufacturer to meet the requirements for TMA in conformance with the standards established by the Transportation Laboratory.

Approvals for new TMA designs proposed as equal to the above approved models shall be in conformance with the procedures (including crash testing) established by the Transportation Laboratory. For information regarding submittal of new designs for evaluation contact: Transportation Laboratory, 5900 Folsom Boulevard, Sacramento, California 95819.

New TMAs proposed as equal to approved TMAs or approved TMAs determined by the Engineer to need recertification shall not be used until approved or recertified by the Transportation Laboratory.

Contractor shall submit a traffic control plan to the Engineer for acceptance prior to beginning any construction activities. All such plans shall conform to Section 12, "Temporary Traffic Control," of the Standard Specifications, the Manual of Traffic Control and these Special Provisions.

Traffic control system required by work which is classed as extra work, as provided in Section 4-1.05, "Changes and Extra Work," of the Standard Specifications, will be paid for as a part of the extra work.

Full compensation for furnishing all labor (including flagging costs), materials (including signs, markings, and markers), tools, equipment, and incidentals and for doing all work involved in "Traffic Control System," including, but not limited to, placing, removing, storing, maintaining, moving to new locations, replacing and disposing of the components of the accepted Traffic Control Plan, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

Attention is directed to Sections 9-1.16, "Progress Payments," and 9-1.17, "Payment After Contract Acceptance," of the Standard Specifications and these Special Provisions. Payments for the contract item "Traffic Control System" will be made on the basis of the percent of work done on all items of work excluding the item for "Traffic Control System."

The adjustment provisions in Section 4-1.05, "Changes and Extra Work," of the Standard Specifications shall not apply to the item of traffic control system. Adjustments in compensation for traffic control system will be made only for increased or decreased traffic control system required by changes ordered by the Engineer and will be made on the basis of the cost of the increased or decreased traffic control necessary. The adjustment will be made on a force account basis as provided in Section 9-1.04, "Force Account," of the Standard Specifications for increased work and estimated on the same basis in the case of decreased work.

## 10-1.18.1 TRAFFIC CONTROL PLAN

The Traffic Control Plan for controlling the traffic and parking, including shoulder closures, detours and lane closures on City roadways, applicable bikeways, pedestrian facilities, and State Highways in conjunction with the work shall be submitted by the Contractor. The Traffic Control Plan shall be consistent with all specific site conditions and work conditions for this project.

Contractor shall submit three (3) copies of a proposed Traffic Control Plan to the City Engineer for review and comments no later than five (5) working days after the pre-construction conference. Construction shall not begin until the traffic control plan has been reviewed and accepted by the City Engineer. The contractor shall allow five (5) working days for review by the City. If revisions are required, as determined by the City Engineer, the Contractor shall revise and resubmit the Traffic Control Plan within five (5) calendar days of receipt of comments and shall allow five (5) working days for review of the revised traffic control plans. Upon acceptance of the Traffic Control Plan by the City Engineer, three (3) additional copies of the traffic control plan, incorporating all the required changes, shall be submitted to the City Engineer. Failure to submit an acceptable traffic control plan shall not in any way delay the start of the contract working days. The Traffic Control Plan shall be prepared and stamped by a Civil Engineer or Traffic Engineer licensed to practice engineering in the State of California. If the Contractor

makes significant changes to the accepted Traffic Control Plan, these changes must also be prepared and stamped by a licensed Civil Engineer or Traffic Engineer.

The Traffic Control Plan shall conform to the Plans, Standard Specifications, the California MUTCD dated September 26, 2006, Section 12, "Temporary Traffic Control," of the Standard Specifications, and these Special Provisions.

The Traffic Control Plan shall be accepted by the Engineer prior to the start of construction. The Contractor shall not proceed with any construction until proper traffic control has been provided to the satisfaction of the Engineer. Failure to comply with any specification herein or with direction from the Engineer may result in work stopped until compliance is restored.

Any lost days due to improper traffic control will be charged against the Contractor's allowable working days.

The Contractor's Traffic Control Plan shall include and detail pedestrian access facilities through the construction areas within the Project right of way in accordance with Section 12-4, "Maintaining Traffic" of the Standard Specifications, for review and acceptance by the Engineer.

The Traffic Control Plan shall include preparation of a plan for the work to be performed within the project limits including, but not limited to, all flagging, signs, portable message signs, barricades, temporary striping, cones, pedestrian access facilities and other incidentals associated with, but not limited to, the widening of the roadway, installation of signal poles and conduits and reconstruction of sidewalks.

Acceptance by the City Engineer of the submitted traffic control plan shall in no way relieve the Contractor of his responsibility for any and all safety requirements conforming to the Standard Specifications, these Special Provisions or others of any public authority having jurisdiction for the safety of persons and property, or to protect them from damage, injury or loss.

Full compensation for conforming to the provisions of this section shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.19 FLAGGING COSTS

The first paragraph of Section 12-1.03, "Construction," of the Standard Specifications is amended in its entirety to read as follows:

Full compensation for furnishing all flaggers, including transporting flaggers, and providing stands, towers, or lights for use of flaggers to provide for passage of public traffic through the work under the provisions in Sections 7-1.03, "Public Convenience," and 7-1.04, "Public Safety," of the Standard Specifications shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.20 PORTABLE FLASHING BEACONS

Portable flashing beacons conforming to the provisions in Section 12, "Temporary Traffic Control," of the Standard Specifications shall be furnished, placed and maintained at the locations shown on the plans, as required per the Contractor's accepted Traffic Control Plan and/or directed by the Engineer.

If flashing beacons are displaced or are not in an upright position, from any cause, during the progress of the work, the Contractor shall immediately repair or replace the flashing beacons in their original locations.

Full compensation for furnishing, placing, maintaining, and removing portable flashing beacons as required per the Contractor's accepted Traffic Control Plan and as ordered by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.21 BARRICADES

Barricades shall be furnished, placed and maintained at the locations shown on the plans, specified in the Standard Specifications or in these Special Provisions or where designated by the Engineer. Barricades shall conform to the provisions in Section 12, "Temporary Traffic Control," of the Standard Specifications and these Special Provisions.

Attention is directed to "Pre-qualified and Tested Signing and Delineation Materials" of these Special Provisions regarding retroreflective sheeting for barricades.

Construction area sign and marker panels conforming to the provisions in "Construction Area Signs," of the Standard Specifications shall be installed on barricades in a manner determined by the Engineer at the locations shown on the plans.

Sign panels for construction area signs and marker panels installed on barricades shall conform to the provisions in "Stationary-Mounted Signs," of the Standard Specifications.

Full compensation for furnishing all barricades, including, but not limited to installation, maintenance and removal, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.22 TEMPORARY PAVEMENT DELINEATION

Temporary pavement delineation shall be furnished, placed, maintained, and removed in conformance with the provisions in Section 12-3.01, "General," of the Standard Specifications and these Special Provisions. Nothing in these Special Provisions shall be construed as reducing the minimum standards specified in the California Manual of Uniform Traffic Control Devices ("CAMUTCD"), or as relieving the Contractor from the responsibilities specified in Section 7-1.04, "Public Safety," of the Standard Specifications.

## 10-1.22.1 GENERAL

Whenever the work causes obliteration of pavement delineation, temporary or permanent pavement delineation shall be in place prior to opening the traveled way to public traffic. Laneline or centerline pavement delineation shall be provided at all times for traveled ways open to public traffic.

All work necessary, including required lines or marks, to establish the alignment of temporary pavement delineation shall be performed by the Contractor. Surfaces to receive temporary pavement delineation shall be dry and free of dirt and loose material. Temporary pavement delineation shall not be applied over existing pavement delineation or other temporary pavement delineation. Temporary pavement delineation shall be maintained until superseded or replaced with a new pattern of temporary pavement delineation or permanent pavement delineation.

Temporary pavement markers and removable traffic tape, including underlying adhesive, which conflicts with a new traffic pattern or which is applied to the final layer of surfacing or existing pavement to remain in place shall be removed when no longer required for the direction of public traffic, as determined by the Engineer.

## 10-1,22.2 TEMPORARY LANELINE AND CENTERLINE DELINEATION

Whenever lanelines and centerlines are obliterated, the minimum laneline and centerline delineation to be provided shall be temporary raised pavement markers placed at longitudinal intervals of not more than 24 feet. The temporary raised pavement markers shall be the same color as the laneline or centerline the markers replace. Temporary raised pavement markers shall be, at the option of the Contractor, one of the temporary pavement markers listed for short term day/night use (14 days or less) or long term day/night use (6 months or less) in "Prequalified and Tested Signing and Delineation Materials" of these Special Provisions.

Temporary raised pavement markers shall be placed in conformance with the manufacturer's instructions and shall be cemented to the surfacing with the adhesive recommended by the manufacturer, except epoxy adhesive shall not be used to place pavement markers in areas where removal of the markers will be required.

Temporary laneline or centerline delineation consisting entirely of temporary raised pavement markers placed on longitudinal intervals of not more than 24 feet shall be used on lanes open to public traffic for a maximum of 14 days. Prior to the end of the 14 days, the permanent pavement delineation shall be placed. If the permanent pavement delineation is not placed within the 14 days, additional temporary pavement delineation shall be provided at the Contractor's expense. The additional temporary pavement delineation to be provided shall be equivalent to the pattern specified for the permanent pavement delineation for the area, as determined by the Engineer.

Where "no passing" centerline pavement delineation is obliterated, the following "no passing" zone signing shall be installed prior to opening the lanes to public traffic. W20-1 (ROAD WORK AHEAD) signs shall be installed from 1,000 feet to 2,000 feet in advance of "no passing" zones. R4-1 (DO NOT PASS) signs shall be installed at the beginning and at every 2,000-foot interval within "no passing" zones. For continuous zones longer than 2 miles, W7-3a or W71(CA) (NEXT \_\_\_\_\_ MILES) signs shall be installed beneath the W20-1 signs installed in advance of "no passing" zones. R4-2 (PASS WITH CARE) signs shall be installed at the end of "no passing" zones. The exact location of "no passing" zone signing will be as determined by the Engineer and shall be maintained in place until permanent "no passing" centerline pavement delineation has been applied. The signing for "no passing" zones shall be removed when no longer required for the direction of public traffic. The signing for "no passing" zones shall conform to the provisions in "Construction Area Signs" of these Special Provisions, except for payment.

### 10-1.22.3 TEMPORARY EDGELINE DELINEATION

On multilane roadways (freeways and expressways), whenever edgelines are obliterated and temporary pavement delineation to replace those edgelines is not shown on the plans, the edgeline delineation to be provided for those areas adjacent to lanes open to public traffic shall be as follows:

- A. Temporary pavement delineation for right edgelines shall, at the option of the Contractor, consist of either solid 4-inch wide traffic stripe of the same color as the stripe the temporary edgeline delineation replaces, or traffic cones, portable delineators or channelizers placed at longitudinal intervals not to exceed 30 feet.
- B. Temporary pavement delineation for left edgelines shall, at the option of the Contractor, consist of either solid 4-inch wide traffic stripe of the same color as the stripe the temporary edgeline delineation replaces, traffic

cones, portable delineators or channelizers placed at longitudinal intervals not to exceed 30 feet or temporary pavement markers placed at longitudinal intervals of not more than 6 feet. Temporary pavement markers used for temporary left edgeline delineation shall be one of the types of temporary pavement markers listed for short term day/night use (14 days or less) or long term day/night use (6 months or less) in "Pre-qualified and Tested Signing and Delineation Materials" of these Special Provisions.

Whenever edgelines are obliterated on roadways, the edgeline delineation to be provided for that area adjacent to lanes open to public traffic shall consist of, at the option of the Contractor, either solid 4-inch wide traffic stripe of the same color as the stripe the temporary edgeline delineation replaces or shall consist of traffic cones, portable delineators or channelizers placed at longitudinal intervals not to exceed 30 feet.

Traffic stripe (4-inch wide) placed for temporary edgeline delineation, which will require removal, shall consist of temporary removable construction grade striping and pavement marking tape listed in "Pre-qualified and Tested Signing and Delineation Materials" of these Special Provisions, and shall conform to the requirements "Temporary Traffic Stripe" (Tape) of this Special Provision. Temporary removable construction grade striping and pavement marking tape when used shall be applied in conformance with the manufacturer's recommendations. Where removal of the 4-inch wide traffic stripe will not be required, painted traffic stripe conforming to the provisions of "Temporary Traffic Stripe (Paint)" of these Special Provisions may be used. The quantity of painted traffic stripe used for temporary edgeline delineation will not be included in the quantities of paint traffic stripe to be paid for.

The lateral offset for traffic cones, portable delineators or channelizers used for temporary edgeline delineation shall be determined by the Engineer. If traffic cones or portable delineators are used as temporary pavement delineation for edgelines, the Contractor shall provide personnel to remain at the project site to maintain the cones or delineators during hours of the day that the cones or delineators are in use.

Channelizers used for temporary edgeline delineation shall be the surface mounted type and shall be orange in color. Channelizer bases shall be cemented to the pavement in the same manner provided for cementing pavement markers to pavement in "Pavement Markers" of these Special Provisions, except epoxy adhesive shall not be used to place channelizers on the top layer of pavement. Channelizers shall be, at the Contractor's option, one of the surface mount types 36 inches listed in Section 8-1.03, "Pre-qualified and Tested Signing and Delineation Materials," of these Special Provisions.

Temporary edgeline delineation shall be removed when no longer required for the direction of public traffic, as determined by the Engineer.

## 10-1.22.4 TEMPORARY TRAFFIC STRIPE (TAPE)

Temporary traffic stripe consisting of removable traffic stripe tape shall be applied at the locations shown on the Contractor's accepting Traffic Control Plans, the project plans, and as directed by the engineer. The temporary traffic stripe tape shall be complete in place at the location shown prior to opening the traveled way to public traffic.

Removable traffic stripe tape shall be the temporary removable traffic stripe tape listed in "Pre-qualified and Tested Signing and Delineation Materials" of these Special Provisions.

Removable traffic stripe tape shall be applied in conformance with the manufacturer's installation instructions and shall be rolled slowly with a rubber tired vehicle or roller to ensure complete contact with the pavement surface. Traffic stripe tape shall be applied straight on tangent alignment and on a true arc on curved alignment. Traffic stripe tape shall not be applied when the air or pavement temperature is less than 50° F, unless the installation procedures to be used are approved by the Engineer, prior to beginning installation of the tape.

When removable traffic stripe tape is specified for temporary left edgeline delineation, temporary pavement markers placed at longitudinal intervals of not more than 6 feet may be used in place of the temporary traffic stripe tape. Temporary pavement markers shall be one of the types of temporary pavement markers listed for long term day/night use (6 months or less) in "Pre-qualified and Tested Signing and Delineation Materials" of these Special Provisions. When temporary pavement markers are used in place of temporary tape traffic stripe, payment for those temporary pavement markers will be made on the basis of the theoretical length of the temporary traffic stripe (tape) required for the left edgeline which the temporary markers replace.

## 10-1.22.5 TEMPORARY TRAFFIC STRIPE (PAINT)

Temporary traffic stripe consisting of painted traffic stripe shall be applied and maintained at the locations shown on the Contractor's accepted Traffic Control Plans, the project plans, and as directed by the Engineer. The painted temporary traffic strip shall be complete in place at the location shown prior to opening the traveled way to public traffic. Removal of painted temporary traffic stripe will not be required.

Temporary painted traffic strip shall conform to the provisions in "Paint Traffic Stripes and Pavement Markings" of these Special Provisions, "Traffic Stripes and Pavement Markings," of the Standard Specifications,

except for payment. At the option of the Contractor, either one or two coats shall be applied regardless of whether on new or existing payment.

When painted traffic stripe is specified for temporary left edgeline delineation, temporary pavement markers placed at longitudinal intervals of not more than 6 feet may be used in place of the temporary painted traffic stripe. Temporary pavement markers will be one of the types of temporary pavement markers listed for long term day/night use (6 months or less) in "Pre-qualified and Tested Signing and Delineation Materials" of these Special Provisions. When temporary reflective pavement markers are used in place of temporary painted traffic stripe, payment for those temporary pavement markers will be made on the basis of the theoretical quantity of temporary traffic stripe (paint) required for the left edgeline the temporary pavement markers replace.

# 10-1.22.6 TEMPORARY PAVEMENT MARKING (TAPE)

Temporary pavement marking consisting of removable pavement marking tape shall be applied at the locations shown on the plans. The temporary pavement marking tape shall be complete in place at the location shown, prior to opening the traveled way to public traffic.

Removable pavement marking tape shall be the temporary removable type pavement marking tape listed in "Pre-qualified and Tested Signing and Delineation Materials" of these Special Provisions and shall be applied and removed in conformance with the provisions specified for applying and removing the temporary traffic stripe tape.

# 10-1.22.7 TEMPORARY PAVEMENT MARKING (PAINT)

Temporary pavement marking consisting of painted pavement marking shall be applied and maintained at the locations shown on the plans. The painted temporary pavement marking shall be complete in place at the location shown prior to opening the traveled way to public traffic. Removal of painted temporary pavement marking will not be required.

Temporary painted pavement marking shall conform to the provisions in "Traffic Stripes and Pavement Markings," of the Standard Specifications, except for payment. At the option of the Contractor, either one or 2 coats shall be applied regardless whether on new or existing pavement.

At the Contractor's option, temporary removable pavement marking tape or permanent pavement marking tape listed in "Pre-qualified and Tested Signing and Delineation Materials" of these Special Provisions may be used instead of painted temporary pavement markings. When pavement marking tape is used, regardless of which type of tape is placed, the tape will be measured and paid for by the square meter as temporary pavement marking (paint).

### 10-1.22.8 TEMPORARY PAVEMENT MARKERS

Temporary pavement markers shall be applied at the location shown on the Contractor's accepted traffic control plan, the project plans and as directed by the Engineer. The pavement markers shall be applied complete in place at the locations shown prior to opening the traveled way to public traffic.

Temporary pavement markers shown on the plans shall be, at the option of the Contractor, one of the temporary pavement markers for long term day/night use (6 months or less) listed in "Pre-qualified and Tested Signing and Delineation Materials" of these Special Provisions.

Temporary pavement markers shall be placed in conformance with the manufacturer's instructions and shall be cemented to the surfacing with the adhesive recommended by the manufacturer, except epoxy adhesive shall not be used in areas where removal of the pavement markers will be required.

Where the temporary pavement delineation shown on the plans for lanelines or centerlines consists entirely of a pattern of broken traffic stripe and pavement markers, the Contractor may use groups of the temporary pavement markers for long term day/night use (6 months or less) in place of the temporary traffic stripe tape or painted temporary traffic stripe. The groups of pavement markers shall be spaced as shown on the plans for a similar pattern of permanent traffic line, except pavement markers shown to be placed in the gap between the broken traffic stripe shall be placed as part of the group to delineate the pattern of broken temporary traffic stripe. The kind of laneline and centerline delineation selected by the Contractor shall be continuous within a given location. Payment for those temporary pavement markers used in place of temporary traffic stripe will be made on the basis of the theoretical length of patterns of temporary traffic stripe (tape) or temporary traffic stripe (paint).

Retroreflective pavement markers conforming to the provisions in "Pavement Markers" of these Special Provisions may be used in place of temporary pavement markers for long term day/night use (6 months or less) except to simulate patterns of broken traffic stripe. Placement of the retroreflective pavement markers used for temporary pavement markers shall conform to the provisions in "Pavement Markers" of these Special Provisions except the waiting period provisions before placing the pavement markers on new asphalt concrete surfacing as specified in Section 81-3.03c, "Epoxy Adhesive," of the Standard Specifications shall not apply and epoxy adhesive shall not be used to place pavement markers in areas where removal of the pavement markers will be required.

## 10-1.22.9 MEASUREMENT AND PAYMENT

Full compensation for furnishing, placing, maintaining, and removing the temporary raised pavement markers and stripes, and/or layout (dribble) lines to establish alignment of temporary pavement markers used for temporary laneline and centerline delineation (including the signing specified for "no passing" zones) and for providing equivalent patterns of permanent traffic lines for these areas when required shall be considered as included in the contract price paid for "Traffic Control System" and no additional compensation will be allowed.

Full compensation for furnishing, placing, maintaining and removing temporary pavement delineation, including but not limited to, all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in applying, maintaining, removing, and repairing temporary pavement delineation, complete in place, as shown on the plans, as shown on the Contractor's accepted Traffic Control Plan, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.23 TEMPORARY RAILING

Temporary railing (Type K) shall be placed at the locations shown on the Contractor's accepted Traffic Control Plan or as shown on the plans, and shall conform to the provisions in Section 12, "Temporary Traffic Control," of the Standard Specifications and these Special Provisions.

Reflectors on temporary railing (Type K) shall conform to the provisions in "Pre-qualified and Tested Signing and Delineation Materials," of these Special Provisions.

The Contractor's attention is directed to the provisions in "Public Safety," and "General Requirements," elsewhere in these Special Provisions.

Temporary railing (Type K) placed in accordance with the provisions in "Public Safety," of these Special Provisions will not be measured nor paid for.

Full compensation for furnishing all labor, materials (including reinforcement and concrete anchorage devices and terminal sections as required), excavation, backfill, tools, equipment and all incidentals, and for doing all work involved in furnishing, placing, maintaining, repairing, moving, reinstalling at a new location, replacing and removing temporary railing as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.24 CHANNELIZERS

Channelizers shall conform to the provisions in Section 12, "Temporary Traffic Control," of the Standard Specifications and these Special Provisions.

Channelizers shall conform to the provisions in "Pre-qualified and Tested Signing and Delineation Materials" of these Special Provisions.

When no longer required for the work as determined by the Engineer, channelizers and underlying adhesive used to cement the channelizer bases to the pavement shall be removed. Removed channelizers and adhesive shall become the property of the Contractor and shall be removed from the site of work.

Channelizers placed in accordance with the Contractor's accepted Traffic Control Plan as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.25 CLEARING, GRUBBING AND REMOVAL

This work shall consist of clearing, grubbing and removing existing vegetation, gravel, dirt, sod and other objectionable material, as necessary to prepare the work area for further excavation, grading or resurfacing.

Clearing and grubbing work shall conform to the provisions in "Clearing and Grubbing," of the Standard Specifications and these Special Provisions. Clearing and grubbing shall be performed only within the excavation limits and embankment slope lines. Existing vegetation, outside the areas to be cleared and grubbed, shall be protected from the Contractor's operations unless specifically shown on the plans to be removed.

Only those trees noted on the plans to be removed or so designated by the Engineer shall be removed.

Attention is directed to "Existing Facilities" of these Special Provisions regarding removal of existing surfacing, obstructions and objects.

Nothing herein shall be construed as relieving the Contractor of his responsibility for final cleanup of the highway as provided in "Cleanup," of the Standard Specifications.

This work shall consist of removing objectionable material, including existing miscellaneous concrete and asphalt areas, gravel, dirt, sod and planter materials, from within the limits of the project as specified. The limits of clearing and grubbing shall be of sufficient area and depth to complete the work as shown on the plans or described in these Special Provisions, and may include excavation and grading as necessary to complete the work.

Work shall also include removal and disposal of existing weeds, brush and other unsuitable material within and along the edge of pavement, and trimming of trees as needed for operation of equipment. Contractor shall allow seven (7) days after spray of weeds within or at edges of pavement to ensure successful eradication prior to chip, scrub and/or cape scrub seal operations. If unsuccessful, Contractor shall respray.

All striping, markings or pavement markers within areas to receive HMA replacement or overlay shall be removed and disposed of as part of the contract items of work involved. If, in the opinion of the Engineer, the pavement surface has been damaged as a result of pavement marker removal, the Contractor shall repair said damage in a manner acceptable to the Engineer at the Contractor's expense.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in clearing and removal, including, but not limited to, cutting, uprooting, sawcutting, excavation, disposal and backfill as shown on the plans, as specified in the Standard Specifications and these Special Provisions and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.26 TREE REMOVAL

Existing trees shown on the plans to be removed shall be completely removed and disposed of outside the highway right of way. Attention is directed to the provisions in "Clearing and Grubbing," of the Standard Specifications and these Special Provisions.

Tree trunks, stumps and roots shall be removed by sawing, grinding and excavating as necessary to completely remove all objectionable vegetative material to a minimum depth of 18" below the top of the finished surfacing.

Branches and suitable brush material may be reduced to chips with a maximum thickness of ½ inch and evenly spread in landscape areas at park locations as directed by the Engineer.

Existing trees shown on the plans to be pruned shall be removed of limbs and branches to a height of fifteen feet above finish grade or as appropriate and approved or directed by the Engineer

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in tree removal, including, but not limited to, pruning cutting, sawing, uprooting, grinding, chipping, excavation, disposal and backfill as shown on the plans, as specified in the Standard Specifications and these Special Provisions and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

# 10-1.27 EXISTING FACILITIES

This work shall consist of removing existing facilities and structures which interfere with construction in the specified work area as shown on the plans and as specified in these Special Provisions. Attention is directed to Section 15, "Existing Facilities" of the Standard Specifications and these Special Provisions.

### 10-1.27.1 REMOVE ASPHALT CONCRETE

Existing asphalt concrete surfacing, and underlying base material shall be removed as needed, as shown on the plans and in conformance with these Special Provisions.

Attention is directed to the provisions in "Clearing and Grubbing," and "Buried Man-Made Objects," of the Standard Specifications and these Special Provisions.

That portion of the asphalt concrete area to be removed abutting asphalt concrete to remain in place shall be cut on neat lines with a power-driven saw before removing the surfacing, unless approved by the Engineer.

Surfacing and base shall be removed without damage to surfacing that is to remain in place. Damage to pavement which is to remain in place shall be repaired to a condition satisfactory to the Engineer or the damaged pavement shall be removed and replaced with new asphalt concrete if ordered by the Engineer. Repairing or removing and replacing pavement damaged outside the limits of pavement to be replaced shall be at the Contractor's expense and will not be measured nor paid for.

Removed materials shall be disposed of outside the highway right of way.

The material remaining in place, after removing surfacing and base to the required depth, shall be graded to a plane, watered, and compacted as deemed necessary by the Engineer.

Areas of the base material which are low as a result of over excavation shall be filled, at the Contractor's expense, with asphalt concrete.

The exact limits of asphalt concrete surfacing to be removed and replaced, as shown on the plans, will be determined by the Engineer.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in removing asphalt concrete, including, but not limited to, saw cutting, disposal, excavation and backfill as shown on the plans, as specified in the Standard Specifications and these Special Provisions and as

directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.27.2 REMOVE CONCRETE

Existing concrete, shown on the plans to be removed shall be completely removed and disposed of in accordance with "Removing Concrete" of the Standard Specifications and these Special Provisions.

Attention is directed to the provisions in "Clearing and Grubbing," and "Buried Man-Made Objects," of the Standard Specifications and these Special Provisions.

Adjacent facilities damaged during concrete removal shall be repaired to a condition satisfactory to the Engineer or shall be removed and replaced if ordered by the Engineer. Repairing or removing and replacing damaged facilities shall be at the Contractor's expense and no additional compensation will be allowed. Attention is directed to hand stacked granite walls that may abut portions of the concrete to be removed. Care shall be taken in sawcutting and working next these walls and any damage to the walls shall be repaired at the Contractor's expense.

Where concrete adjacent to stone retaining walls is to be removed, the concrete must be saw cut 6 inches from the wall or the base of the curb perpendicular to the street. The concrete can then be removed using hand tools in order to eliminate the potential for damage to the stone retaining walls.

Concrete shall be completely removed and disposed of outside the highway right of way.

Depressions left after concrete removal shall be immediately backfilled with sand cement slurry or Class 2 Aggregate Base and compacted sufficiently to obtain an unyielding surface.

Removal of concrete shall include removal of sidewalks, curbs, gutters, driveways and miscellaneous concrete curbs as shown on the plans to be removed.

Reinforcing or other steel may be encountered in portions of the concrete. No additional compensation will be allowed for the removal of concrete containing reinforcing or steel.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved including, but not limited to, sawcutting, disposal, excavation and backfill as shown on the plans, as specified the Standard Specifications and these Special Provisions and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### **10-1.27.3 REMOVE POST**

Existing posts shown on the plans to be removed and corresponding lighting assemblies and attachments shall be completely removed and disposed of outside the highway right of way in accordance with the provisions of the Standard Specifications, the project plans and these Special Provisions. Removal of posts shall include complete removal of the concrete footings, electrical conduit. Depressions left after concrete removal shall be backfilled with sand cement slurry or Class 2 Aggregate Base and compacted sufficiently to obtain an unyielding surface.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in post removal, including, but not limited to removal, excavation, hauling and disposal, and backfilling, as shown on the plans, as specified in the Standard Specifications and these Special Provisions and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.27.4 REMOVE SIGN

Existing signs, posts and sign hardware, shown on the plans to be removed shall be removed and disposed of in accordance with the requirements of the Standard Specifications and these Special Provisions.

Concrete footings for signs, and sign posts deemed unusable by the Engineer, shall be removed and disposed of outside the highway right of way in accordance with the provisions of the Standard Specifications, the project plans and these Special Provisions.

Signs, sign hardware and salvageable posts shall be delivered to the City's corporation yard at 556 Freeman Lane.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in sign removal, including, but not limited to removal, excavation, hauling and disposal, and backfilling, as shown on the plans, as specified in the Standard Specifications and these Special Provisions and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.27.5 REMOVE AND SALVAGE SIGN

Existing signs, posts and sign hardware, shown on the plans to be removed shall be carefully removed and salvaged in accordance with the requirements of the Standard Specifications and these Special Provisions.

Concrete footings for signs, and sign posts deemed unusable by the Engineer, shall be removed and disposed of outside the highway right of way in accordance with the provisions of the Standard Specifications, the project plans and these Special Provisions.

Signs, sign hardware and salvageable posts shall be delivered to the City's corporation yard at 556 Freeman Lane.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in sign removal, including, but not limited to removal, salvaging, excavation, hauling and disposal, and backfilling, as shown on the plans, as specified in the Standard Specifications and these Special Provisions and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.27.6 REMOVE AND/OR SALVAGE MISCELLANEOUS ITEMS

Miscellaneous items shown on the plans to be removed or salvaged, including, but not limited to valve boxes, sprinklers, posts and signs will be completely removed and disposed of or salvaged for re-use as directed by the Engineer. Full compensation for such items shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.27.7 RESET UTILITY COVER TO GRADE

Utility cover boxes and manhole frames located in new concrete areas shall be reset to grade in accordance with the requirements of the Standard Specifications and these Special Provisions.

Existing boxes and frames shall be protected during demolition operations and carefully removed and salvaged for reuse as directed by the Engineer.

Boxes and frames shall be properly supported and reset to the proposed finish grade as part of the concrete reconstruction work.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved, including, but not limited to, removal, excavation, backfill, and resetting utility covers and manhole frames in new concrete, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### **10-1.28 WATERING**

Watering shall conform to the provisions in Section 17, "Watering," of the Standard Specifications and these Special Provisions.

Full compensation for conforming to the provisions of this section shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### **10-1.29 EARTHWORK**

Earthwork shall conform to the provisions in Section 19, "Earthwork," of the Standard Specifications and these Special Provisions.

Surplus excavated material shall become the property of the Contractor and shall be disposed of in conformance with the provisions in "Contractor-Property Owner Agreement," of the Standard Specifications.

The Contractor's attention is directed to "Surplus Material," and "Deficiency Material," of the Standard Specifications.

Where a portion of the existing pavement surfacing is to be removed, the outline of the area to be removed shall be cut on a neat line with a power-driven saw to a minimum depth of 0.25-foot before removing the surfacing. If sawcut pavement is damaged before paving, it is the Contractor's responsibility, at his expense, to re-cut and remove any damaged portion before paving. Full compensation for cutting the existing surfacing shall be considered as included in the various contract items of work involved and no additional compensation will be allowed.

Graded areas shall be watered and compacted in accordance with the Standard Specifications, City Improvement Standards and as directed by the Engineer. Subbase sections for sidewalk, curb ramps, curb and gutter, driveways, roadway shoulders and asphalt concrete pavement shall be compacted to 95% relative compaction to a minimum depth of six inches.

#### 10-1.29.1 ROADWAY EXCAVATION

Roadway excavation shall conform to the provisions in Section 19-2, "Roadway Excavation," of the Standard Specifications and shall include all work associated with grading for the roadway improvements, grading for sidewalk, curb, gutter and curb ramps, grading earth ditches, and the grading to provide smooth transitions for conform areas.

In addition to the provisions of the Standard Specifications, roadway excavation shall include excavation, grading, and embankment construction necessary to construct roadway widening and sidewalk subgrades, vegetated

swales, and slopes, in accordance with the requirements of Section 19, "Earthwork," of the Standard Specifications and these Special Provisions..

Relative compaction of subgrade shall conform to all the provisions in Section 19-5 "Compaction" of the Standard Specifications. Payment for compaction of earthwork shall be considered as included in the various items of work requiring compaction and no additional compensation will be allowed.

If the Contractor elects to excavate and replace subgrade/base material to facilitate compaction, full compensation for that work will be considered as included in the contract item of work requiring the compaction of earthwork and no separate payment will be made.

Removed materials shall be properly disposed of outside the highway right of way unless otherwise designated on the plans or approved by the Engineer.

The material remaining in place, after removing surfacing and base to the required depth, shall be graded to a plane, watered, and compacted.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved including, but not limited to, excavation, stockpiling, loading, transporting, compacting, disposal, and all grading as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.29.2 TEMPORARY SHORING

Temporary shoring will be necessary for any work required where the required excavation/trenching exceeds 5 feet in depth. If excavation/trenching exceeds 5 feet in depth, the Contractor shall be responsible for the design, installation, and maintenance of the temporary shoring system. The temporary shoring system shall be prepared and signed by an engineer who is registered as a Civil Engineer with the State of California.

Attention is directed to Section 7-1.02K(6)(b), "Excavation Safety," of the Standard Specifications, and "Excavation Safety Plans," of these Special Provisions.

All bracing and shoring shall comply with rules, orders and regulations of the California Division of Industrial Safety (D.I.S.). Trenching less than 5 feet in depth will require the Contractor to secure the appropriate D.I.S. permit and evidence of said permit shall be provided to the Engineer upon request.

The Contractor shall submit three (3) copies of the proposed temporary shoring system plan to the engineer a minimum of five (5) working days prior to the pre-construction conference. If excavation/trenching exceeds 5 feet in depth, the contractor shall not start construction of items of work requiring shoring before the temporary shoring plan has been reviewed and accepted by the Engineer.

The Contractor shall allow five (5) working days for the Engineer's review. If revisions are required, as determined by the Engineer, the Contractor shall revise and resubmit the temporary shoring system plan within five (5) calendar days of receipt of the Engineer's comments and shall allow five (5) working days for the Engineer to review the revisions. Upon acceptance of the temporary shoring system plan by the Engineer, three (3) additional copies of the temporary shoring system plan, incorporating all the required changes, shall be submitted to the Engineer. Failure to submit an acceptable temporary shoring system plan shall not in any way delay the start of the contract working days. If the Contractor makes significant changes to the accepted temporary shoring system plan, these changes must also be prepared and stamped by a licensed Civil Engineer.

Full compensation for temporary shoring, temporary shoring plans, for furnishing all labor, materials, tools, equipment and incidentals, and for doing all work involved in "Temporary Shoring," complete in place, as shown on the Contractor's accepted temporary shoring system, as shown on the plans, as specified in these Special Provisions and as directed by the Engineer shall be considered as included in the various contract items of work requiring the excavation or trenching exceeding 5 feet and no additional compensation will be allowed.

#### 10-1.30 GRIND HMA PAVEMENT

Existing hot mix asphalt concrete pavement shall be ground at the locations and to the dimensions shown on the plans, including "T" trench grinding and taper grind areas. Grinding of asphalt concrete pavement shall be performed by the cold planing method. Planing of the asphalt concrete pavement shall not be done by the heater planing method.

Any sections of asphalt concrete that become loose after taper grinding shall be removed and disposed of by the Contractor at the Contractor's sole expense.

The limits of all transverse and longitudinal taper grinding shall be field-approved by the Engineer prior to grinding.

Cold planing machines shall be equipped with the cutter head not less than 30-inches in width and shall be operated so as not to produce fumes or smoke. The cold planing machine shall be capable of planing the pavement without requiring the use of a heating device to soften the pavement during or prior to the planing operation.

The depth, width and shape of the cut shall be indicated on the typical cross-sections, details, plans or as directed by the Engineer. The final cut shall result in a uniform surface conforming to the typical cross-sections and details. The outside lines

of the planed area shall be neat and uniform. Planing asphalt concrete pavement operations shall be performed without damage to the surfacing to remain in place.

Following planing operations, a drop-off of more than 0.15-foot will not be allowed at any time between adjacent lanes open to public traffic.

When transverse joints are planed in the pavement at conform lines; no drop-off shall remain between the existing pavement and planed area when the pavement is opened to public traffic. If asphalt concrete has not been placed to the level of existing pavement before the pavement is to be opened public traffic, a temporary asphalt concrete taper shall be constructed. Asphalt concrete for temporary tapers shall be placed to the level of the existing pavement and tapers on a slope of 30:1, or flatter, to the level of the planed area.

Asphalt concrete for temporary tapers shall be constructed of commercial quality asphalt concrete or cold mix asphalt concrete and may be spread and compacted by any method that will produce a smooth riding surface. Temporary asphalt concrete tapers shall be maintained continuously and when no longer needed completely removed, including the removal of all loose material from the underlying surface, before placing the permanent surfacing. Such removed material shall be disposed of outside the highway right-of-way..

Operations shall be scheduled such that not more than 3 days shall elapse between the time when transverse joints are planed in the pavement at the conform lines and the permanent surfacing is placed at such conform lines.

The material planed from the roadway surface, including material deposited in existing gutters or on the adjacent traveled way, shall be removed and disposed of outside the right-of-way.

Removal operations of cold-planed material shall be concurrent with planing operations and follow within 50 feet of the planer, unless otherwise directed by the Engineer. The Contractor shall provide sediment control measures to prevent sediment from entering the storm drain system.

The Contractor's attention is directed to "General Requirements" and "Cooperation" of these Special Provisions and the Project Plans for the order required for various items of work. The concrete curb and gutter shall be constructed prior to any final grading and paving operations for the street sections and the new pavement structural section shall be constructed prior to grinding of the existing pavement.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved including, but not limited to, grinding, disposal, sediment control measures, furnishing asphalt concrete for and constructing, maintaining, removing and disposing of temporary asphalt concrete tapers, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

# 10-1.31 ADJUST UTILITY COVER TO GRADE

Frames and covers of existing valve boxes manholes and utility vaults shall be salvaged and reused or replaced as indicated on the plans or as directed by the Engineer. Enclosure boxes will be adjusted to grade in accordance with "Frames, Covers, Grates, and Manholes" of the Standard Specifications, the City of Grass Valley Standard Detail ST-28 "Adjust Utility Cover/Manhole to Grade" and these Special Provisions.

The Contractor shall accurately locate and record the location of all utility covers to be adjusted to grade and shall furnish the Engineer a copy of said record prior to paving. Contractor is responsible for protecting utilities per Section 5-1.36 "Property and Facility Preservation" of the Standard Specifications. Utilities include but are not limited to electrical vaults, telephone boxes, water meters, and water valves, sewer and drainage manholes

For utilities within overlay areas, all utility boxes must be exposed within 24 hours of paving, and the structures adjusted to grade within 72 hours of being covered by overlay.

For utilities in areas of concrete improvements to be reconstructed, care shall be taken to protect the utility during construction and adjust the utility to finished grade (if different from existing grade).

Each of the respective utility companies shall retain the ability to decrease the amount of a contract item of work or eliminate in its entirety.

Contractor shall provide at least 48 hours advance notice to each respective owner of castings to be adjusted to grade.

Waste materials generated while adjusting the water valve box frame and cover to grade shall be completely removed and disposed of in accordance with "Surplus Material" of the Standard Specifications.

Concrete used for collars shall conform to the provisions in "Minor Concrete" of the Standard Specifications. Portland Cement Concrete shall be Class A, conforming to the provisions of "Concrete" of the Standard Specifications.

Prior to removal of an existing manhole frame, a platform shall be placed in the manhole above the top of the sewer or storm drain. The platform shall remain in place until all work on the manhole has been completed and the asphalt concrete has been placed around the manhole. Once adjustment of the manhole is complete, all dirt and debris shall be removed from the platform and the invert of the manhole.

Trimming of manhole cones (tapered section) will not be permitted.

All sections of the manhole grade rings shall be set in cement mortar and all joints smoothly grouted inside and out. The top of the completed manhole shall contain at least one 3-inch grade adjustment ring.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved including, but not limited to, excavation, lowering, raising to grade, backfill, concrete and hot mix asphalt shall be

considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.32 AGGREGATE BASE

Aggregate base shall be Class 2, (3/4 inch) maximum grading, and shall conform to the provisions in Section 26, "Aggregate Bases," of the Standard Specifications and these Special Provisions. Aggregate base shall be processed to 95% relative compaction.

Do not store reclaimed asphalt concrete or aggregate base with reclaimed asphalt concrete within 100 feet measured horizontally of any culvert, watercourse, or bridge.

Aggregate base shall not contain volcanic cinder material.

Aggregate base shall have at least 80% of the rock having two or more fractured surfaces evident.

Aggregate base shall be placed to the lines, dimensions, and grades shown on the Plans or as directed by the Engineer.

Where existing aggregate base is shown on the plans to be remain in place, the material shall be sufficiently watered and compacted to obtain an unyielding surface, to the relative compaction as shown on the plans. If the existing base material is found to be unsuitable, in the opinion of the Engineer, it shall be replaced with new aggregate base in conformance with the provisions and payment details of this section. Payment for compaction of existing base to remain in place shall be considered as included in the various contract items of work requiring the compaction and no additional compensation will be allowed.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in the installation of aggregate base, including, but not limited to, placing, grading, excavating, and compacting aggregate base as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.33 SLURRY CEMENT BACKFILL

Slurry Cement Backfill shall conform to the provisions in "Slurry Cement Backfill," of the Standard Specifications and these Special Provisions.

Slurry cement backfill may be substituted for aggregate base backfill where approved or directed by the Engineer. Compensation for slurry cement backfill voluntarily substituted for aggregate base shall be in accordance with the payment provisions of "Aggregate Base". Substitutions ordered by the Engineer will be paid for as extra work as provided in Section 4-1.05, "Changes and Extra Work," of the Standard Specifications.

## 10-1.34 UTILITY TRENCH BEDDING AND BACKFILL

Attention is directed to "Earthwork," and "Aggregate Bases" of the Standard Specifications and these Special Provisions for requirements regarding utility line bedding and trench backfill.

Bedding material for water, sewer, storm drain and electrical facilities shall be sand in conformance with "Sand Beddings" of the Standard Specifications and shall be installed in accordance with the plans and City Improvement Standards.

Trench backfill shall be aggregate base or slurry cement backfill at the Contractor's discretion. Backfill shall be installed in accordance with the requirements of "Compaction" of the Standard Specifications and the plans and City Improvement Standards.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in utility trench bedding and backfill as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.35 ¾-INCH CRUSHED ROCK

Crushed rock base and gravel are defined as natural or crushed rock, free from organic matter, and meeting the following gradation:

Sieve Size	Percent Passing by Weight			
1 -inches	100			
3/4 -inch	90 – 100			
3/8"	20 - 55			
No. 4	0 – 10			

No. 8	0 – 5

Durability Index shall be at least 40 per California Test Method No. 229 or ASTM D3744.

Full compensation for conforming to the provisions of this section shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.36 AREA DRAIN INLET

This work includes constructing and installing a new drainage inlet, complete in place with inlet grate as shown on the plans, and shall conform to the provisions of the Standard Specifications and these Special Provisions.

The drainage inlet grate shall be ductile iron conforming to the improvement plans, provisions in Section 75, "Miscellaneous Metal," of the Standard Specifications and these Special Provisions.

The drainage inlet shall be custom fabricated to the dimensions shown on the plans or as directed by the Engineer. The drainage inlet shall be a 8" PVC basin with water tight connections (Nyloplast 2808AG or approved equal). Height shall be as needed for the invert of the proposed drainage pipes.

Attention is directed to Section 19, "Earthwork," of the Standard Specifications for requirements regarding structure excavation, trenching and shoring, and backfill. Backfill must conform to "Aggregate Base" of these Special Provisions unless the use of native fill is approved by the Engineer. All backfill shall be compacted to a minimum 95% of relative compaction, unless otherwise specified by the Engineer.

Surplus excavated material shall become the property of the Contractor and shall be removed and disposed of outside of the highway right of way in accordance with the provisions in Section 7-1.13, "Disposal Of Material Outside The Highway Right Of Way," of the Standard Specifications and in accordance with these Special Provisions.

Full compensation for furnishing all labor, materials, including pipe, tools, equipment, and incidentals, and for doing all the work involved in the installation of drainage inlets, including, but not limited to excavation, disposal, backfill, compaction, forming, reinforcement, construction, finishing and installation of frames, grates and collars as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.37 DRAINAGE INLET

This work includes constructing and installing a new drainage inlet, complete in place with inlet grate as shown on the plans, and shall conform to the provisions of the Standard Specifications and these Special Provisions.

The drainage inlet grate shall conform to the improvement plans, provisions in Section 75, "Miscellaneous Metal," of the Standard Specifications and these Special Provisions. The drainage inlet grate shall be bicycle safe type 18-9X conforming to the specifications of the Standard Plans, or as approved by the Engineer.

The drainage inlet shall be constructed of Portland cement concrete conforming to the provisions in Section 90 "Portland Cement Concrete" of the Standard Specification and these Special Provisions.

The drainage inlet shall be constructed to the dimensions shown on the plans or as directed by the Engineer. The drainage inlet shall be a type G5 inlet conforming to the specifications of the Standard Plans. Height shall be as needed for the invert of the existing drainage culvert.

Attention is directed to Section 19, "Earthwork," of the Standard Specifications for requirements regarding structure excavation, trenching and shoring, and backfill.

Surplus excavated material shall become the property of the Contractor and shall be removed and disposed of outside of the highway right of way in conformance with the provisions in "Surplus Material," of the Standard Specifications.

Full compensation for furnishing all labor, materials, including pipe, tools, equipment, and incidentals, and for doing all the work involved in the installation of drainage inlets, including, but not limited to excavation, disposal, backfill, compaction, forming, reinforcement, construction, finishing and installation of frames, grates and collars as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.38 TRENCH DRAIN

This work includes constructing and installing a new trench drain, complete in place with inlet grate as shown on the plans, and shall conform to the provisions of the Standard Specifications and these Special Provisions.

The drainage inlet grate shall conform to the improvement plans, provisions in Section 75, "Miscellaneous Metal," of the Standard Specifications and these Special Provisions. The drainage inlet grate shall be bicycle safe and heel friendly to meet accessibility requirements. Grate shall be H-20 traffic rated and have a locking mechanism.

The trench drain channel shall be constructed of cast in place Portland cement concrete conforming to the provisions in Section 90 "Portland Cement Concrete" of the Standard Specification and these Special Provisions. Channel shall be reinforced and doweled into abutting concrete improvements to prevent displacement. The Contractors attention is directed to Section 52 "Reinforcement" of the Standard Specifications and these Special Provisions for requirements regarding reinforcement bars as shown on the plans.

The trench drain shall be constructed to the dimensions shown on the plans or as directed by the Engineer. The Designer may propose alternate edge drain systems including slotted drains, area drains or a combination system as appropriate to handle sheet flows and building/property runoff. Attention is directed to "Value Engineering" of these Special Provisions for any cost savings associated with an alternate system

Existing drainage pipes, area drain inlets, downspout discharge pipes and connections to the existing drainage system shall be maintained, reconnected, or otherwise replaced as part of trench drain connection as necessary for a fully functional, efficient, and easily maintained drainage system.

Full compensation for furnishing all labor, materials, including pipe, tools, equipment, and incidentals, and for doing all the work involved in the installation of drainage inlets, including, but not limited to excavation, disposal, backfill, compaction, forming, reinforcement, construction, finishing and installation of frames and grates, and reconnection of existing facilities as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.39 DRAINAGE PIPE

Drainage pipe shall be either high density polyethylene pipe (HDPE) or poly vinyl chloride (PVC) pipe as shown on the plans or as directed by the Engineer.

Drainage pipe shall be furnished and installed in conformance with the provisions of Section 64 "Plastic Pipe" of the Standard Specifications and these Special Provisions.

HDPE and PVC pipe shall be circular, with smooth interior walls and a diameter as shown on the plans. HDPE pipe shall be Type S with corrugated exterior walls.

Attention is directed to Section 19, "Earthwork," of the Standard Specifications for requirements regarding structure excavation, trenching and shoring, and backfill. Backfill must conform to "Slurry Cement Backfill" of the Standard Specifications, for all segments of pipe underlying the street structural section, as shown on the plans. Backfill for portions outside of the street section must conform to "Aggregate Base" of these Special Provisions unless the use of native fill is approved by the Engineer. All backfill shall be compacted to a minimum 95% of relative compaction, unless otherwise specified by the Engineer.

PVC pipe to be imbedded in concrete shall be wrapped with a flexible polyethylene foam pipe wrap tape with a minimum thickness of 3/32".

Full compensation for furnishing all labor, materials (including pipe and backfill material), tools, equipment, and incidentals, and for doing all the work involved in the installation of drainage pipe, including, but not limited to excavating, placing, joining, backfilling, and slurry cement backfill, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.40 REINFORCEMENT

Reinforcement shall be ASTM A615 Grade 60 Rebar. All reinforcement shall conform to section 52 "Reinforcement" of the standards specifications. Lap splices when required shall be staggered.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in the installation of reinforcement shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.41 MINOR CONCRETE

Concrete sidewalk, curb, gutters, driveways, curb ramps and other minor concrete shown on the plans shall conform to the provisions in Section 73, "Concrete Curbs and Sidewalk," and Section 90 "Concrete" of the Standard Specifications and these Special Provisions. The Contractors attention is directed to Section 52 "Reinforcement" of the Standard Specifications and these Special Provisions for requirements regarding reinforcement bars as shown on the plans.

Aggregate for minor concrete shall be 1" maximum grading unless otherwise specified and shall conform to the combined aggregate grading limits in "Combined Aggregate Gradation," of the Standard Specifications.

For textured, stamped and colored concrete surfaces, aggregate must comply with the grading requirements for fine aggregate in "Fine Aggregate Gradation," of the Standard Specifications.

Concrete for all minor concrete work shall be "six sack" concrete properly prepared at a mixing plant.

Concrete shall be placed at the locations shown on the plans, struck off and compacted until a layer of mortar is brought to the surface. The concrete shall be screeded to the required grade and cross section and floated to a uniform surface.

Whenever new concrete curb, gutter and sidewalk adjoins existing, the existing concrete vertical face shall be doweled 4-inches deep with 12 inch long, grade 60, #4 rebar. Abutting sidewalk shall be doweled mid-section with a minimum of two dowels. Abutting curb and gutter ends shall be doweled twice, 18 inches apart, centered on the curb and gutter section. If the dowels were not set with the existing concrete, the penetrating portion of the dowel shall be coated with two-part epoxy in conformance with Caltrans Standard Specifications Section 95-1.

All concrete surfaces shall be broom finished unless specified as stamped or textured concrete. Surfaces to be used by pedestrian traffic shall be broomed transversely to the line of traffic. All other surfaces shall be broomed longitudinally unless otherwise specified.

Existing painted concrete curbs that are replaced shall be repainted with two coats of paint per the manufacturer's recommendations. Curbs of median islands in the center of the roadway shall be painted yellow and median island curbs on the roadway edges shall be white or red as shown on the plans and as directed by the Engineer. Attention is directed to "Painting Concrete" of the Standard Specifications.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in the installation of minor concrete including, but not limited to: subgrade preparation; forming and constructing sidewalks, curb ramps, curbs, gutters, stamped patio and driveways; and concrete finishing, grooving and stamping, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.42 DETECTABLE WARNING SURFACE

Detectable warning surfaces shall be installed at the curb ramp locations shown on the plans and as directed by the Engineer, in accordance with the Standard Specifications and these Special Provisions. Curb ramp detectable warning surface shall consist of raised truncated domes in conformance with the details shown on the plans and the Standard Plans.

The detectable warning surface shall be prefabricated. The color of the detectable warning surface shall be yellow conforming to Federal Standard 595B, Color No. 33538. Prefabricated detectable warning surface shall be in conformance with the requirements established by the Department of General Services, Division of State Architect and be attached in conformance with the manufacturer's recommendations.

The finished surfaces of the detectable warning surface shall be free from blemishes. The manufacturer shall provide a written 5-year warranty for prefabricated detectable warning surfaces, guaranteeing replacement when there is defect in the dome shape, color fastness, sound-on-cane acoustic quality, resilience, or attachment. The warranty period shall begin upon acceptance of the contract.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in the installation of detectable warning surfaces including, but not limited to; setting prefabricated warning surface into wet concrete, finishing and grooving concrete around warning surface border, and protecting the surface during construction operations shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.43 HOT MIX ASPHALT (HMA)

Hot Mix Asphalt (HMA) shall be Type A, installed using the Standard Construction Process, and shall conform to the provisions in "Hot Mix Asphalt," of the Standard Specifications and these Special Provisions.

The grade of asphalt binder to be mixed with aggregate for Type A HMA shall be Grade PG 64-16 conforming to the provisions in "Asphalt Binders," of the Standard Specifications.

Aggregate used for Type A HMA shall conform to the 1/2 inch maximum grading specified in Section 39-2.02B(4), "Aggregates," of the Standard Specifications for all structural section replacement areas, as designated on the plans.

The asphalt content of the asphalt mixture will be determined in conformance with the requirements in California Test 379, or in conformance with the requirements in California Test 382.

Paint binder (tack coat) shall be applied to existing surfaces to be surfaced and between layers of HMA, except when eliminated by the Engineer, and shall be applied to all vertical surfaces of existing pavement, curb and gutter, and construction joints in the surfacing against which additional material is to be placed and to other surfaces as designated by the Engineer.

Paint binder (tack coat) shall be paving asphalt conforming to the provisions in Section 39-1.02B, "Tack Coat," and Section 92, "Asphalts," of the Standard Specifications. The grade of paving asphalt to be used as paint binder will be determined by the Engineer.

Paint binder (tack coat) shall be applied in the gallon per square yard range limits specified for the surfaces to receive asphalt concrete in the tables below. The exact application rate within the range will be determined by the Engineer.

Application Rates for Paint Binder (Tack Coat) on HMA	
Type of surface to receive paint binder (tack coat)	Paving

	Asphalt
	gal/sq yd
Dense, compact surfaces, between layers, and on PCCP	0.01 - 0.02
Open textured, or dry, aged surfaces	0.02 - 0.06

HMA shall be spread and compacted in the number of layers of the thicknesses indicated in the following table:

Total Thickness Shown on Plans <sup>a</sup>	No. of Layers	,		Next Lower Layer Thickness (foot)		All Other Lower Layer Thickness (foot)	
	-	Min.	Max.	Min.	Max.	Min.	Max.
0.20-foot or less	1		_				_
0.25-foot	2b	0.12	0.13	0.12	0.13		
0.30-0.40 foot	2	0.15	0.20	0.15	0.25		
0.45-foot or more	c	0.15	0.20	0.15	0.25	0.15	0.40

- a. When pavement reinforcing fabric is shown to be placed between layers of HMA, the thickness of asphalt concrete above the pavement reinforcing fabric shall be considered to be the "Total Thickness Shown on Plans" for the purpose of spreading and compacting the HMA above the pavement reinforcing fabric.
- b. At the option of the Contractor, one layer 0.25-foot thick may be placed.
- c. At least 2 layers shall be placed if total thickness is 0.45-foot. At least 3 layers shall be placed if total thickness is more than 0.45-foot and less than 0.90-foot. At least 4 layers shall be placed if total thickness is 0.90-foot or more.

HMA base shall be spread and compacted in one or more layers. Each layer of HMA base shall be not less than 0.20-foot nor more than 0.40-foot in compacted thickness, except that where the total thickness of HMA to be placed over HMA base is 0.20-foot or less, the layer of HMA base below the HMA shall not exceed 0.25-foot.

A layer shall not be placed over a layer which exceeds 0.25-foot in compacted thickness until the temperature of the layer which exceeds 0.25-foot in compacted thickness is less than 160° F at mid depth.

HMA shall be placed to the lines, dimensions, and grades shown on the plans or as directed by the Engineer. No allowance will be made for HMA placed outside those dimensions unless otherwise ordered by the Engineer. Areas of the base material which are low as a result of over excavation shall be filled, at the Contractor's expense, with HMA.

Full compensation for furnishing all labor, materials (including asphaltic emulsions, liquid asphalts, asphalts, and aggregate), tools, equipment, and incidentals, and for performing all the work involved in placing hot mix asphalt, complete in place including application of a prime coat or paint binder (tack coat) as shown on the Plans, as specified in these Special Provisions, and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.44 THERMOPLASTIC TRAFFIC STRIPE AND PAVEMENT MARKING

Traffic stripes and pavement markings shall be thermoplastic applied in conformance with the provisions in Section 84, "Traffic Stripes and Pavement Markings," of the Standard Specifications and these Special Provisions.

Thermoplastic material shall be free of lead and chromium, and shall conform to the requirements in State Specification PTH-02ALKYD.

Retroreflectivity of the thermoplastic traffic stripes and pavement markings shall conform to the requirements in ASTM Designation: D 6359-99. White thermoplastic traffic stripes and pavement markings shall have a minimum initial retroreflectivity of 250 mcd m<sup>-2</sup> lx<sup>-1</sup>. Yellow thermoplastic traffic stripes and pavement markings shall have a minimum initial retroreflectivity of 150 mcd m<sup>-2</sup> lx<sup>-1</sup>.

Where striping joins existing striping, as shown on the plans, the Contractor shall begin and end the transition from the existing striping pattern into or from the new striping pattern a sufficient distance to ensure continuity of the striping pattern.

Thermoplastic material for traffic stripes shall be applied at a minimum rate of 0.20-lb/ft. The minimum application rate is based on a solid stripe of 4 inches in width. Thermoplastic traffic stripes shall be applied at the minimum thickness of 0.059-inch. Thermoplastic traffic stripes and pavement markings shall be free of runs, bubbles, craters, drag marks, stretch marks, and debris.

At the option of the Contractor, permanent traffic striping and pavement marking tape conforming to the provisions in "Pre-qualified and Tested Signing and Delineation Materials" of these Special Provisions may be placed instead of the thermoplastic traffic stripes and pavement markings specified herein. Permanent tape, if used, shall be installed in conformance with the manufacturer's specifications. If permanent tape is placed instead of thermoplastic traffic stripes and

pavement markings, the tape will be measured and paid for by the linear foot as thermoplastic traffic stripe and by the square foot as thermoplastic pavement marking.

Thermoplastic traffic stripes will be measured by the linear foot along the line of the traffic stripes, without deductions for gaps in broken traffic stripes. Deductions will be made at cross streets and driveways as applicable. A double traffic stripe, consisting of two 4-inch wide yellow stripes, shall be measured and paid for as one traffic stripe. A striped median island or two-way left turn lane shall be measured and paid for as two separate double traffic stripes.

Where existing pavement delineation is to be covered or obliterated by the Contractor's work or where the existing striping alignment and marking placement is shown to be substantially modified, the Contractor shall demarcate the proposed layout prior to placement of permanent striping and marking. The Contractor shall notify the Engineer in advance of beginning layout work and shall spot, track or outline the proposed delineation for field acceptance by the Engineer.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in applying thermoplastic traffic markings complete in place, as shown on the plans, as specified in the Standard Specifications and the Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.45 ROADSIDE SIGN

Roadside signs shall be furnished and installed at the locations shown on the plans or where designated by the Engineer and in conformance with the provisions in "Roadside Signs," of the Standard Specifications and these Special Provisions.

Sign posts shall be a 2" X 2" square metal tube conforming to the standard specifications for cold rolled carbon sheet steel, commercial quality, ASTM A-446 or hot rolled carbon steel sheet, structural quality, ASTM A-570-90 and ASTM A-653-94 structural grade 50.

The finished posts shall be straight and shall have a smooth uniform finish. All holes and ends shall be free from burrs and the ends shall be cut square. Permissible variation in the straightness is one-sixteenth of an inch in three feet. The square tubes shall have holes that are seven-sixteenths plus or minus one sixty-fourth inches diameter on one (1) inch centers, on all four sides for the entire length of the pole. The holes shall be on the centerline of each side in true alignment and opposite to each other directly and diagonally. All posts shall be cut in such a manner to ensure hole alignment between anchors and sleeves when driven into the ground.

Square tubes shall be installed into a sleeve of the same material. A 27-inch long anchor sleeve shall be embedded in Class B/Class 3, 5-sack concrete that is placed in an excavated hole a minimum of 36-inches deep and 6-inches in diameter. Two holes of the sleeve shall remain showing above the finished grade, with all holes below grade taped closed. No material other than the square post shall intrude into the sleeve. The square signpost inside the sleeve shall move freely in the vertical direction after installation.

All posts shall be long enough such that the lowest hanging sign mounted on the post is a minimum of seven feet above the finish grade or walkway, if located in a sidewalk.

Signs and object markers located in travel areas and islands shall include a reboundable/ spring design base unless otherwise specified.

The contract price paid for each roadside sign shall be considered to consist of the complete sign assembly including, post, footing, primary sign panel and any additional sign plaques attached to the same post as shown on the plans or as directed by the Engineer.

Object markers shall be Type K-1 or Type Q per the Standard Specifications and as shown on the plans. Uprights shall be flexible plastic with a rebounding assembly, on a surface mount base properly secured with bolts or adhesive.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals including but not limited to, sign panels, post(s), epoxy and hardware, and for doing all work involved in furnishing and installing object markers, complete in place, as shown on the plans, as specified in the Standard Specifications, the Standard Plans, these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals including but not limited to, sign panels, post(s), braces, brackets, lag screws, washers, and hardware, and for doing all work involved in furnishing and installing roadside signs, complete in place, including installation of sign panels, as shown on the plans, as specified in the Standard Specifications, the Standard Plans, these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

# 10-1.45.1 FURNISH SIGN

Signs shall be fabricated and furnished in accordance with details shown on the plans, the Traffic Sign Specifications, and these Special Provisions.

Traffic Sign Specifications for California sign codes are available for review at: http://www.dot.ca.gov/hq/traffops/signtech/signdel/specs.htm. Traffic Sign Specifications for signs referenced with

Federal MUTCD sign codes can be found in Standard Highway Signs Book, administered by the Federal Highway Administration, which is available for review at: http://mutcd.fhwa.dot.gov/ser-shs\_millennium.htm.

Temporary or permanent signs shall be free from blemishes that may affect the serviceability and detract from the general sign color and appearance when viewing during daytime and nighttime from a distance of 25 feet. The face of each finished sign shall be uniform, flat, smooth, and free of defects, scratches, wrinkles, gel, hard spots, streaks, extrusion marks, and air bubbles. The front, back, and edges of the sign panels shall be free of router chatter marks, burns, sharp edges, loose rivets, delaminated skins, excessive adhesive over spray and aluminum marks.

No later than 14 days before sign fabrication, the Contractor shall submit a written copy of the quality control plan for signs to the Engineer for review. The Engineer will have 10 days to review the quality control plan. Sign fabrication shall not begin until the Engineer approves the Contractor's quality control plan in writing. The Contractor shall submit to the Engineer at least 3 copies of the approved quality control plan. The quality control plan shall include, but not be limited to the following requirements:

- A. Identification of the party responsible for quality control of signs,
- B. Basis of acceptance for incoming raw materials at the fabrication facility,
- C. Type, method and frequency of quality control testing at the fabrication facility,
- D. List (by manufacturer and product name) of process colors, protective overlay film, retroreflective sheeting and black non-reflective film.
- E. Recommended cleaning procedure for each product, and
- F. Method of packaging, transport and storage for signs.

No legend shall be installed at the project site. Legend shall include letters, numerals, tildes, bars, arrows, route shields, symbols, logos, borders, artwork, and miscellaneous characters. The style, font, size, and spacing of the legend shall conform to the Standard Alphabets published in the FHWA Standard Highway Signs Book. The legend shall be oriented in the same direction in accordance with the manufacturer's orientation marks found on the retroreflective sheeting.

On multiple panel signs, legend shall be placed across joints without affecting the size, shape, spacing, and appearance of the legend. Background and legend shall be wrapped around interior edges of formed panel signs as shown on plans to prevent delamination.

All signs shall have the following notation placed on the lower right side of the back of each sign where the notation will not be blocked by the sign post or frame:

- A. Name of the sign manufacturer,
- B. Month and year of fabrication,
- C. Type of retroreflective sheeting, and
- D. Manufacturer's identification and lot number of retroreflective sheeting.

Signs with a protective overlay film shall be marked with a dot of 3/8 inch in diameter. The dot placed on white border shall be black, while the dot placed on black border shall be white. The dot shall be placed on the lower border of the sign before application of the protective overlay film and shall not be placed over the legend and bolt holes. The application method and exact location of the dot shall be determined by the manufacturer of the signs.

For sign panels that have a minor dimension of 48 inches or less, no splice will be allowed in the retroreflective sheet except for the splice produced during the manufacturing of the retroreflective sheeting. For sign panels that have a minor dimension greater than 48 inches, only one horizontal splice will be allowed in the retroreflective sheeting.

Unless specified by the manufacturer of the retroreflective sheeting, splices in retroreflective sheeting shall overlap by a minimum of one inch. Splices shall not be placed within 2 inches from edges of the panels. Except at the horizontal borders, the splices shall overlap in the direction from top to bottom of the sign to prevent moisture penetration. The retroreflective sheeting at the overlap shall not exhibit a color difference under the incident and reflected light. Signs exhibiting a significant color difference between daytime and nighttime shall be replaced immediately.

The Department will inspect signs at the delivery location, and in accordance with Section 6, "Control of Materials," of the Standard Specifications. The Engineer will inspect signs for damage and defects before and after installation. Repairing sign panels will not be allowed except when approved by the Engineer.

Regardless of kind, size, type, or whether delivered by the Contractor or by a common carrier, signs shall be protected by thorough wrapping, tarping, or other methods to ensure that signs are not damaged by weather conditions and during transit. Signs shall be dry during transit and shipped on palettes, in crates, or tier racks. Padding and protective materials shall be placed between signs as appropriate. Finished sign panels shall be

transported and stored by method that protects the face of signs from damage. The Contractor shall replace wet, damaged, and defective signs.

Signs shall be stored in a dry environment at all times. Signs shall not rest directly on the ground or become wet during storage. Signs, whether stored indoor or outdoor, shall be free standing. In areas of high heat and humidity signs shall be stored in enclosed climate-controlled trailers or containers. Signs shall be stored indoor if duration of the storage will exceed 30 days. Screen processed signs shall be protected, transported and stored as recommended by the manufacturer of the retroreflective sheeting.

When requested, the Contractor shall provide the Engineer test samples of signs and materials used at various stages of production. Sign samples shall be 12" x 12" in size with applied background, letter or numeral, and border strip.

Full compensation for all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and fabricating signs, including all required quality control measures as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.45.2 SIGN MATERIALS

Alloy and temper designations for sheet aluminum shall be in accordance with ASTM Designation: B 209. The Contractor shall furnish the Engineer a Certificate of Compliance in conformance with "Certificates of Compliance," of the Standard Specifications for the sheet aluminum.

Sheet aluminum shall be pretreated in accordance to ASTM Designation: B 449. Surface of the sheet aluminum shall be cleaned, deoxidized, and coated with a light and tightly adherent chromate conversion coating free of powdery residue. The conversion coating shall be Class 2 with a weight between 10 milligrams per square foot and 35 milligrams per square foot, and an average weight of 25 milligrams per square foot. Following the cleaning and coating process, the sheet aluminum shall be protected from exposure to grease, oils, dust, and contaminants. Sheet aluminum shall be free of buckles, warps, dents, cockles, burrs, and defects resulting from fabrication.

Single sheet aluminum signs shall be fabricated and furnished with or without frame. The Contractor shall furnish the sheet aluminum in accordance to "Sheet Aluminum" of these Special Provisions. Single sheet aluminum signs shall be fabricated from sheet aluminum alloy 6061-T6 or 5052-H38.

Single Sheet aluminum signs shall not have a vertical splice in the sheet aluminum. For signs with depth greater than 48 inches, one horizontal splice will be allowed in the sheet aluminum.

Framing for single sheet aluminum signs shall consist of aluminum channel or rectangular aluminum tubing. The framing shall have a length tolerance of  $\pm 1/8$  inch. The face sheet shall be affixed to the frame with rivets of 3/16-inch diameter. Rivets shall be placed within the web of channels and shall not be placed less than 1/2 inch from edges of the sign panels. Rivets shall be made of aluminum alloy 5052 and shall be anodized or treated with conversion coating to prevent corrosion. The exposed portion of rivets on the face of signs shall be the same color as the background or legend where the rivets are placed.

Finished signs shall be flat within a tolerance of  $\pm 1/32$  inch per linear foot when measured across the plane of the sign in all directions. The finished signs shall have an overall tolerance within  $\pm 1/8$  inch of the detailed dimensions.

Aluminum channels or rectangular aluminum tubings shall be welded together with the inert gas shielded-arc welding process using E4043 aluminum electrode filler wires as shown on the plans. Width of the filler shall be equal to wall thickness of smallest welded channel or tubing.

The Contractor shall furnish retroreflective sheeting for sign background and legend in conformance with ASTM Designation: D 4956 and "Pre-qualified and Tested Signing and Delineation Materials" of these Special Provisions. Retroreflective sheeting shall be applied to sign panels as recommended by the retroreflective sheeting manufacturer without stretching, tearing, and damage.

Class 1, 3, or 4 adhesive backing shall be used for Type II, III, IV, VII, VIII, and IX retroreflective sheeting. Class 2 adhesive backing may also be used for Type II retroreflective sheeting. The adhesive backing shall be pressure sensitive and fungus resistant.

The Contractor shall furnish and apply screened process color, non-reflective opaque black film, and protective overlay film of the type, kind, and product that are approved by the manufacturer of the retroreflective sheeting. The Contractor shall provide patterns, layouts, and set-ups necessary for the screened process.

The Contractor shall furnish the Engineer a Certificate of Compliance in accordance to Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for the screened process color, non-reflective opaque black film, and protective overlay film.

The surface of the screened process color shall be flat and smooth. When the screened process colors determined from the instrumental testing in accordance to ASTM Designation: D 4956 are in dispute, the Engineer's visual test will govern.

The Contractor may use green, red, blue, and brown reverse-screened process colors for background and non-reflective opaque black film or black screened process color for legend. The coefficient of retroreflection for reverse-screened process colors on white retroreflective sheeting shall not be less than 70 percent of the coefficient of retroreflection specified in ASTM Designation: D 4956.

The screened process colors and non-reflective opaque black film shall have the same outdoor weatherability as that of the retroreflective sheeting. After curing, screened process colors shall withstand removal when tested by applying 3M Company Scotch Brand Cellophane Tape No. 600 or equivalent tape over the color and removing with one quick motion at 90° angle

Full compensation for furnishing all labor, tools, equipment, and materials, including sheet aluminum, single sheet aluminum, retroreflective sheeting, and screened process color, as shown on the plans, as specified in the Standard Specifications, these Special Provisions and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.46 PERMEABLE PAVERS

This work shall consist of the installation of permeable decorative concrete pavers including all subsurface drainage and structural components as shown on the plans or directed by the engineer.

Pavers shall have a minimum depth of 2.75" and rated for Heavy Vehicular Traffic (ASTM C1272) and AASHTO H-20/HS20 loading. Finished grade slopes shall be a minimum of 1% and a maximum of 5% to maintain adequate drainage. Final aesthetic design including color, texture, edge treatment, and pattern shall be agreed upon by the Engineer. Pavers shall be installed per manufactures specs or agreed upon on the plans or directed by the engineer.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in the installation of permeable pavers, and all subsurface drainage and structural components, as shown on the plans, as specified in the Standard Specifications, the Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### **10-1.47 PLANTERS**

This work shall consist of the installation of the various styles of planter boxes including, raised steel frame planters with built-in seating, modular raised planters, steel edge raised planter and concrete framed planter areas as shown on the plans.. Planters shall be installed per the locations, dimensions and materials as shown on the plans, as proposed by the Designer and as agreed upon by the Engineer.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in the installation of planters, as shown on the plans, as specified in the Standard Specifications, the Special Provisions, and as directed by the Engineer shall be included in the various contract items involved and no additional compensation will be allowed therefore.

### 10-1.48 **RAILING**

Railing shall conform to the provisions in "Railing and Barriers" of the Standard Specifications and these Special Provisions..

The base metal for the manufacture of posts shall be commercial quality, or better, weldable steel or aluminum. All ferrous materials shall be protected by painting, powder coating or other specified coatings

Posts, railing and pickets shall be fabricated from schedule 40 or 80 pipe conforming to the requirements shown on the plans. Size shall be as shown on the plans or otherwise approved.

All posts shall be fitted with rainproof tops.

Posts shall be set in concrete footings or attached to concrete structures/footings with anchor bolts.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in constructing railing, complete in place, including, but not limited to excavating and pouring concrete footings, installing, fitting and connecting, posts, rails and pickets, or complete assembled panels, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.49 BOLLARD ASSEMBLY

This work shall consist of installing a pneumatic automated retractable security bollard as shown on the plans. The bollard shall be 6" diameter stainless steel, security grade pipe, coupled with an integrated flush mounted housing assembly, set in a reinforced concrete footing complete with sub drainage system.

Bollard shall be Calpipe Security Bollards, LBPA06 assemblies, or approved equal, with complete electro pneumatic, automatic retractable control system.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in the installation of bollard assemblies, including, but not limited to excavating, constructing drainage system,

placing conduit, constructing concrete footing, placing control panel, wiring, testing and adjusting bollard system, complete in place, as shown on the plans, as specified in the Standard Specifications, these Special Provisions and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

# 10-1.50 PG&E COORDINATION

This work shall consist of all coordination and correspondence with Pacific Gas and Electric (PG&E) for existing and proposed electrical facilities.

The Contractor's attention is directed to the project plans for items requiring coordination with PG&E including, but are not limited to streetlights, inground lights, receptacles and irrigation timers

Coordination in general involves timing and satisfying requirements of power disconnection and removals, relocations, and new connections and startup.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all work involved in coordinating with PG&E for electrical and gas service connection, transfer and relocation shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.51 ELECTRICAL METER PEDESTAL

This work shall consist of the installation of a new electrical meter pedestal, complete with all required circuit breakers as needed to supply electrical power to new street lighting.

The Contractor's attention is directed "PG&E Coordination" and "Electrical Systems" of the Standard Specifications, CA Electrical Codes and these Special Provisions.

Pedestal rating and circuit breaker sizing shall be predicated on the load requirements of the lighting. The Contractor shall propose circuit breaker sizes and layout and submit for approval by the Engineer.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in the installation of an electrical meter pedestal including, but not limited to, pouring footing, mounting pedestal, configuring circuits, assembling, installing breakers, wiring, labeling and securing a fully functional electrical meter pedestal, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

# 10-1.52 ELECTRICAL CONDUIT

Electrical conduit shall be furnished and installed in conformance with the provisions of Section 64 "Plastic Pipe", Section 86, "Electrical Systems" of the Standard Specifications, CA Electrical Codes and these Special Provisions.

Below grade electrical conduit shall be Schedule 40 poly vinyl chloride (PVC) pipe as shown on the plans or as directed by the Engineer. Above grade conduit shall be Schedule 80 PVC.

Bedding material shall be provided as shown on the plans and shall be sand or clean crushed rock as approved by the Engineer. Electrical conduit shall be carefully placed onto a prepared and compacted bedding layer, accurately connected and adjusted before covering with bedding material to restrain and protect in place.

Attention is directed to Section 19, "Earthwork," of the Standard Specifications for requirements regarding structure excavation, trenching and shoring, and backfill. Backfill must conform to "Aggregate Base" of these Special Provisions unless the use of native fill is approved by the Engineer and will paid for in accordance with the payment details of "Aggregate Base". All backfill shall be compacted to a minimum 95% of relative compaction, unless otherwise specified by the Engineer.

Full compensation for furnishing all labor, materials (including pipe and bedding material), tools, equipment, and incidentals, and for doing all the work involved in the installation of electrical conduit, including, but not limited to excavating, placing, joining, and backfilling, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.53 PULL BOX

Electrical pull box shall be Christy N09, Jensen HN1017, or approved equal as shown on the plans or as directed by the Engineer.

Electrical pull box shall be reinforced concrete box with polymer concrete bolt down lid, furnished and installed in conformance with the provisions of Section 86, "Electrical Systems" of the Standard Specifications, CA Electrical Codes and these Special Provisions.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in the installation of electrical pull box, including, but not limited to excavating, placing, and backfilling, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by

the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.54 STREETLIGHT ASSEMBLY

This work shall consist of the installation of a new streetlight assembly, complete with lantern, pole, clamshell cover and concrete footing, as well as all required mounting brackets, banner arms, eye bolts, outlets and accessories.

The Contractor's attention is directed "PG&E Coordination" and "Electrical Systems" of the Standard Specifications, CA Electrical Codes and these Special Provisions.

Streetlight assemblies shall be ANP Lighting, Decorative Architectural cast aluminum pole mounted luminaires or approved equal. Optional banner attachments, GFCI outlets, eye bolts and security camera attachments shall be provided as shown on the plans and as agreed upon with the Engineer.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in the installation of streetlights including, but not limited to, pouring footing, mounting pole, assembling, wiring, and securing a fully functional street light assembly, complete in place, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.55 GFCI RECEPTACLE

GFCI receptacle, complete with conduit and wiring, shall be furnished and installed in conformance with "Electrical Conduit", Section 86, "Electrical Systems" of the Standard Specifications, CA Electrical Codes and these Special Provisions.

GFCI receptacle shall be 20 amp outdoor rated, with waterproof, locking cover, installed in approved locations including raised planters and seating areas, or as approved by the Engineer.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in the installation of GFCI receptacles including, but not limited to, trenching, placing, mounting, assembling, wiring, and testing, complete in place, as shown on the plans, as specified in the Standard Specifications, the Special Provisions, and as directed by the Engineer shall be included in the various contract items involved and no additional compensation will be allowed therefore.

### 10-1.56 INGROUND LIGHTING

Inground lighting (Uplight), complete with conduit and wiring, shall be furnished and installed in conformance with "Electrical Conduit", Section 86, "Electrical Systems" of the Standard Specifications, CA Electrical Codes and these Special Provisions.

Inground lighting shall be Lumenpulse LBIL high performance, ground-recessed LED projector, or approved equal.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in the installation of inground lighting, including, but not limited to, trenching, placing, assembling, wiring, testing and adjusting, complete in place, as shown on the plans, as specified in the Standard Specifications, the Special Provisions, and as directed by the Engineer shall be included in the various contract items involved and no additional compensation will be allowed therefore.

### 10-1.57 LANDSCAPING

Landscaping includes all trees, shrubs and ground cover and the amendments, fertilizers, stakes, posts, straps and all items required for the installation of landscaping features as shown on the plans.

All landscaping work shall be performed using commonly accepted industry practices and shall conform to the provisions in "Landscape" of the Standard Specifications. Landscaping includes all work necessary for the successful establishment and long term health of the landscape plantings, including but not limited to, clearing and grading, soil preparation, fertilizing and amendment, plant installation, backfill and watering.

The Contractors attention is directed to "Compost" of these Special Provisions for details of compost material and amendment procedures for new plantings.

If plantings are unavailable or differ from those specified on the plans the Contractor shall provide a submittal with species identification and information for approval prior to ordering.

Prior to installation, all plantings shall be inspected by the Contractor and shall be healthy with a strong root structure. The soil mass surrounding the roots shall remain intact and shall be kept moist at all times until planted. Plantings shall be placed into prepared holes at proper depths, tamped into place, level with or slightly above finish grade and thoroughly watered.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved including, but not limited to, planting procurement, grading, soil preparation, amendment, planting, backfill and watering, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by

the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.57.1 MULCH

This work shall consist of placing wood chip mulch material as shown on the plans or as directed by the Engineer.

Mulch shall be woody material in conformance with the requirements of "Mulch," of the Standard Specifications. Woody materials shall consist of shredded cedar or redwood materials or clean processed cedar or redwood wood products. Deleterious materials such as rocks, glass, plastics, metals, clods, weeds, weed seeds, coarse objects, sticks larger than the specified particle size, salts, paint, petroleum products, pesticides or other chemical residues that would be harmful to plant or animal life shall not exceed 0.1 percent of the mulch volume.

At least 95% by volume of mulch material shall equal State Standard Specification particle size or 0.5 - 3 inches in length and not less than 0.5 inches in width and 0.125 inches in thickness.

Mulch shall be placed and spread from the outside of the proposed plant basin to the adjacent edges of shoulders, curbs, sidewalks, fences, plastic header board, and existing plantings to a uniform depth of 3-4 inches.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in the installation of mulch, including, but not limited to placing, leveling, and spreading mulch in planter areas, as shown on the plans, as specified in the Standard Specifications, the Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.57.2 COMPOST

This work shall consist of placing compost as a soil amendment for landscape plantings as shown on the plans or as directed by the Engineer.

Compost shall consist of a combination of chipped, shredded or ground vegetation, wood products, and horse, cattle or chicken manure. No biosolids or biosolids compost (sewage solids) shall be sued. Compost shall be processed so that an internal process temperature of 135 degrees F is maintained for 15 continuous days. Compost shall be free of pathogens and seed. The compost shall contain between 0.6 and 2.0 percentage total nitrogen, 2.0-3.0% phosphorous, 2.0-7.0% potassium, 0.3-4% sulfur, 0.8-1.5% magnesium, 1.5-2.0% calcium and 0.3%-0.5% sodium.

Compost shall be free of woody deleterious materials such as rocks, glass, plastics, metals, clods, weeds, weed seeds, coarse objects, sticks larger than the specified particle size, salts, paint, petroleum products, pesticides or other chemical residues that would be harmful to plant or animal life.

In general, compost shall be spread to an approximate 2 inches layer in and around the perimeter of all planting holes. Compost shall me mixed and incorporated by tilling or shoveling with native soil to a depth of not less than 6 inches. Planting holes shall be backfilled with amended soil, uniformly distributed throughout the entire depth of the plant hole without clods and lumps.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in the installation of compost, including, but not limited to placing, spreading, incorporating, and backfilling planting holes, as shown on the plans, as specified in the Standard Specifications, the Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.58 IRRIGATION SYSTEM

Irrigation System includes all valves, boxes, sprinklers, emitters, bubblers, piping, joints, trenching, backfill, and all items required for the construction of irrigation for the planting areas as shown on the plans.

All irrigation system work shall be furnished and installed using commonly accepted industry practices and shall conform to the provisions in "Irrigation Systems," of the Standard Specifications.

Sprinklers and emitters shall conform to the type, pattern, material, and operating characteristics shown on the plans.

### 10-1.58.1 WIRING

Wiring for irrigation system is to be connected to the City irrigation controller at the maintenance building for Memorial Park. Contractor shall coordinate with the Engineer for final wiring layout. If suitable conduit or existing wiring connections points are not found in proximity to the work area, significant additional trenching work or wiring installation is not expected of the Contractor. City will assist Contractor with wiring connections to City irrigation controller.

## 10-1.58.2 PLASTIC PIPE

Plastic pipe supply lines shall be polyvinyl chloride (PVC) schedule 40 pressure rated pipe. Plastic pipe supply lines shall have solvent cemented type joints. Primers shall be used on the solvent cemented type joints.

Plastic pipe supply lines (main) shall have a minimum cover of 15 inches. Plastic pipe (irrigation lines) shall be installed not less than 8 inches below the finished grade, measured to the top of the pipe.

## 10-1.58.3 IRRIGATION SYSTEMS FUNCTIONAL TEST

Functional tests for the irrigation controllers and associated automatic irrigation systems shall conform to the provisions in Section 20 5.027J, "Testing," of the Standard Specifications and these special provisions.

Tests shall demonstrate to the Engineer, through one complete cycle of the irrigation controllers in the automatic mode, that the associated automatic components of the irrigation systems operate properly. If automatic components of the irrigation systems fail a functional test, these components shall be repaired at the Contractor's expense and the testing repeated until satisfactory operation is obtained.

## 10-1.58.4 PAYMENT

Full compensation for furnishing all labor, materials, tools and equipment, including; valves, boxes, sprinklers, emitters, bubblers, piping, joints, fittings, drippers, wiring, and incidentals, and for doing all the work involved in installing an irrigation system for the plantings areas including; trenching, assembly, flushing, testing, backfill, and spreading of excess soil, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### 10-1.59 WATER DISTRIBUTION SYSTEM FACILITIES

This work includes but is not limited to: installation of new water distribution main lines and connection to existing water mains, water valves, fire hydrants, temporary bypasses, new water service lines, reconnection to existing water meters, excavation and backfill of utility trenches, and flushing, disinfecting and testing of all water systems prior to placing into service.

Domestic water system improvements and abandonments shall be in accordance with the City Improvement Standards and these Special Provisions and as shown on the plans.

Water shutoffs shall be coordinated with the Engineer and the Contractor shall provide a minimum of 48 hours advance notice to all affected residents and businesses prior to beginning work involving water shutoffs. Attention is directed to "Notification and Scheduling" of these Special Provisions for notification requirements and sample notifications forms

The City requires as few water outages for as short a time as possible and with the fewest water customers and fire hydrants out of service at any one time when converting over areas to the new water system. In no case shall any customers be out of service longer than six hours unless approved by the City Engineer.

## 10-1.59.1 CONNECTIONS TO EXISTING WATER LINES

Connections to existing water main lines and water service lines shall comply with "Water Supply System", "Connection to Existing Facilities", and "Tying Into The City System" of the City Improvement Standards and as noted and modified as follows:

- The Contractor shall make all system taps and tie-in connections to existing main lines and service lines.
- No nighttime work will be permitted unless otherwise approved by the Engineer.
- Prior to scheduling any tie-in connections involving outages, the Contractor shall have on hand all fittings, valves, gaskets, bolts, adaptors, and incidentals necessary to complete the connection.
- A minimum of 5 days prior to any scheduled shutoff, the Contractor shall submit to the Engineer a water outage schedule including the dates, times and customers affected by the outages. Once approved by the Engineer, notice shall be provided by the Contractor to all affected customers a minimum of 48 hours in advance of the outage, in accordance with "Notification and Scheduling" of these Special Provisions.
- If a portion of road is needed to be closed to accomplish the water tie-in, the road closure and notice shall be as provided in "Closure Requirements and Conditions" of these Special Provisions.

## 10-1.59.2 UTILITY TRENCH BEDDING AND BACKFILL

Attention is directed to "Earthwork," and "Aggregate Bases" of the Standard Specifications and these Special Provisions for requirements regarding utility line bedding and trench backfill.

Bedding material for water facilities shall be sand in conformance with "Sand Beddings" of the Standard Specifications and shall be installed in accordance with the plans and City Improvement Standards.

Trench backfill shall be aggregate base or slurry cement backfill at the Contractor's discretion. Backfill shall be installed in accordance with the requirements of "Compaction" of the Standard Specifications and the plans and City Improvement Standards.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in utility trench bedding and backfill as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### **10-1.59.3 WATER MAIN LINE**

This work shall consist of placing, polyvinyl chloride (PVC) water pipe or ductile iron pipe (DIP) as shown on the plans and as directed by the Engineer.

The Contractor's attention is directed to "Water Supply System" of the City Improvement Standards for required water line installation procedures, including flushing, disinfection and testing.

PVC pipe shall conform to AWWA standards for PVC pressure pipe, C-900 Class 200. DIP shall conform to the standards ANSI/AWWA C-150/21.50 thickness design of ductile iron pipe and to "Ductile Iron Pipe Centrifugally Cast in Metal Molds or Sand-Lined Molds for Water and Other Liquids' (ANSI/AWWA C-151/A21.51).

Water main pipe shall be installed at the locations and alignments shown on the plans and shall include all pipe, fittings, bends, reducers, adapters, connectors, restraints, nuts, bolts, thrust blocks and appurtenances as needed to construct a fully operational, safe and secure water distribution system.

The Contractor's attention is directed to the requirements of "Gate Valve", "Water Main Tee Assembly" and "Water Main Connection to Existing" of these Special Provisions for payment details of the respective water main line components to that will be paid for separately.

Full compensation for furnishing all labor, materials tools, equipment, and incidentals (including tracing wire, backfill marking tape, thrust blocks) and for doing all the work involved in the installation of water main line, including, but not limited to, excavating, placing and joining pipe, bedding, backfill, flushing, disinfecting and testing, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

# 10-1.59.4 GATE VALVE AND BOX

This work shall consist of constructing a complete gate valve assembly on water mains and fire hydrant lines, as shown on the plans and as directed by the Engineer.

The Contractor's attention is directed to "Water Supply System" of the City Improvement Standards for required water line installation procedures, including flushing, disinfection and testing.

Full compensation for furnishing all labor, materials (including valve boxes), tools, equipment, and incidentals (tracing wire) and for doing all the work involved in the installation of gate valve, including, but not limited to, excavating, placing and joining, backfill, blocking, concrete collar construction, valve box setting, flushing, disinfecting and testing, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.59.5 WATER MAIN TEE ASSEMBLY

This work shall consist of installing a water main line tee fitting and associated components as shown on the plans and as directed by the Engineer.

The Contractor's attention is directed to "Water Supply System" of the City Improvement Standards for required water line installation procedures, including flushing, disinfection and testing.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved, including, but not limited to, excavating, placing and connecting tee to adjoining fittings, bedding, thrust block construction, backfill, flushing, disinfecting and testing, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

## 10-1.59.6 AIR RELEASE VALVE ASSEMBLY

This work shall consist of constructing an air release valve assembly on water mains, as shown on the plans and as directed by the Engineer.

The Contractor's attention is directed to "Water Supply System" of the City Improvement Standards for required water line installation procedures, including flushing, disinfection and testing.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in the installation of air release valve, including, but not limited to, excavating, placing and joining, backfill, blocking, concrete collar construction, valve box setting, flushing, disinfecting and testing, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.59.7 WATER MAIN TAP AND SADDLE

This work shall consist of tapping the water main line and installing a saddle connection for water service lines, as shown on the plans and as directed by the Engineer.

The Contractor's attention is directed to "Water Supply System" of the City Improvement Standards for required water line installation procedures, including flushing, disinfection and testing.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in the installation of a saddle tap on water main lines, including, but not limited to, excavating, water main line tap and saddle installation, bedding, backfill, flushing, disinfecting and testing, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.59.8 WATER SERVICE LINE

This work shall consist of installing polyethylene (poly) water pipe, from the water main line to water meter assemblies, as shown on the plans and as directed by the Engineer.

The Contractor's attention is directed to "Water Supply System" of the City Improvement Standards for required water line installation procedures, including flushing, disinfection and testing.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in the installation of water service line, including, but not limited to, excavating, placing and joining pipe, bedding, backfill, flushing, disinfecting and testing, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.59.9 WATER METER ASSEMBLY AND BOX

This work shall consist of a water meter assembly, complete with meter box and cover, from water service lines to existing customer side service lines as shown on the plans and as directed by the Engineer.

The Contractor's attention is directed to "Water Supply System" of the City Improvement Standards for required water line installation procedures, including flushing, disinfection and testing.

Existing water meters shall be removed and salvaged for reuse. New water meters shall be provided by the City as needed. Existing water meter boxes shall remain in place whenever possible, otherwise a new box shall be provided and set by the Contractor in accordance with "Adjust Utility Cover to Grade" of these Special Provisions. A customer side shutoff valve shall be provided during water meter assembly replacement.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in the installation of water service line, including, but not limited to, excavating, placing and joining pipe, bedding, backfill, flushing, disinfecting and testing, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.59.10 FIRE HYDRANT LINE

This work shall consist of installing ductile iron pipe (DIP), from the main line tee to the fire hydrant assembly as shown on the plans and as directed by the Engineer.

The Contractor's attention is directed to "Water Supply System" of the City Improvement Standards for required water line installation procedures, including flushing, disinfection and testing.

Full compensation for furnishing all labor, tools, equipment, and incidentals, and for doing all the work involved in the installation of fire hydrant line, including, but not limited to, excavating, placing and joining pipe, bedding, thrust block construction, backfill, flushing, disinfecting and testing, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer, shall

be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.59.11 WATER MAIN CONNECTION TO EXISTING

This work shall consist of connecting new water main lines to existing main lines by way of a Series 2000PV Mechanical Restraint Joint(s), or approved equal, as shown on the plans and as directed by the Engineer.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved, including, but not limited to, excavating, placing and connecting mechanical joint to existing and new main line pipe, bedding, thrust block construction, backfill, flushing, disinfecting and testing, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer, shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.59.12 ABANDON EXISTING WATER LINES

This work shall consist of abandoning existing water main lines, water service lines, and fire hydrant lines by removing those portions of water lines that are in conflict with proposed water lines and capping open ends of water lines to be abandoned in place, as shown on the plans and as directed by the Engineer.

Abandoned water lines shall be plugged with a tight fitting cap or closed by a wall of minor concrete not less than 0.5-foot thick, or by a tight brick wall not less than 0.67-foot thick with cement mortar joints. Minor concrete shall conform to the provisions in "Minor Concrete" of the Standard Specifications. Fire hydrant lines shall be plugged a minimum of 12" below the surrounding grade. Water lines to be abandoned that are 4" in diameter or greater shall be either abandoned in place by pressure grouting full of cementitious grout slurry, or completely excavated and removed.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in abandoning existing water lines including, but not limited to, excavation, disconnection and removal as needed, plugging of open ends with concrete or capping with approved end cap and backfill, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.60 PUBLIC AMENITIES

This work shall consist of the installation of public amenities as shown on the plans including, trash/recycling receptacles, bottle fillers, chairs and dining tables, umbrellas, picnic tables, lunch counters and any other miscellaneous components shown.

Trash/recycling receptacles shall be Anova 40 gallon steel slat receptacle or approved equal. Receptacles shall be composed of 10-gauge steel vertical slotted pattern with contour top, plastic liner, rubber feet, optional recycle decal, and side access door. Receptacles shall be installed by manufactures specification, as proposed by the Designer or as approved by the Engineer.

Bottle fillers shall be Elkay Outdoor ezH20 Bottle Filling Station Pedestal or approved equal as proposed by the Designer or as approved by the Engineer.

Chairs shall be free standing, foldable per Landscapeforms Parc Centre standards or approved equal. Dining tables shall be free standing, powder coated per Landscapeforms Catena standards or approved equal. Chairs and tables shall be installed as proposed by the Designer or as approved by the Engineer.

Umbrellas shall be Saule P50 or approved equal. Umbrellas shall utilize a single aluminum pole, with a 100% water and oil resistant canopy, breathable and rated for UPF80 sun protections. Umbrellas shall have optional base options of either a floor plate anchored to the ground, or an aluminum base filled with sand. Umbrellas shall be installed as proposed by the Designer or as approved by the Engineer.

Picnic tables shall be ADA compliant made with wooden tabletop slates and a galvanized steel frame as proposed by the Designer or as approved by the Engineer.

Lunch counters shall be site-specific sizes as shown on the plans. Counter tops shall be wood slats, untreated Kebony or equal, with a galvanized steel plate frame and tube steel support post as proposed by the Designer or as approved by the Engineer.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in the installation of public amenities, as shown on the plans, as specified in the Standard Specifications, the Special Provisions, and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.61 FINISHING ROADWAY

Finishing roadway shall conform to the provisions in Section 22, "Finishing Roadway," of the Standard Specifications except for the method of payment.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in finishing roadway, complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.62 NOTIFICATION AND SCHEDULING

The Contractor shall deliver a "NOTICE" to all residents and businesses of properties adjacent to the project streets and those on connecting streets that have no other means of accessing their properties but through the project or are otherwise adversely affected by the scheduled project operations. The Contractor will provide a standard "NOTICE" form in sufficient numbers to permit distribution to all homes and businesses within a 500 foot radius of the project site. The Contractor will complete the "NOTICE" forms by entering the name of the firm, local and toll free telephone number, date of issuance, and shall indicate on the notice street closures, traffic control measure or outages that are expected to be in place.

"NOTICE" forms shall be issued to the affected properties no later than forty-eight (48) hours prior to the work. The Contractor shall be responsible for removing any "NOTICES" that were not removed by the resident or business after all work is completed by the Contractor or as directed by the Engineer. Any costs associated with towing of vehicles in the way of construction shall be borne by the Contractor. "NOTICE" shall not be left in mailboxes, per Section PO 11.2.1 of the Domestic Mail Manual (DMM). The Contractor shall be held liable for any fines.

The Contractor shall coordinate with the Engineer to notify the Police Department, Fire Department, Ambulance Service, Waste Management, Post Office, Durham Transportation, and Gold Country Stage forty-eight (48) hours prior to any lane closure. Notification may be in conjunction with the scheduling requirements of the "SCHEDULING" portion of the Standard Specifications. Particular attention shall be given to the construction of adequate facilities on any street to permit the passing of emergency vehicles.

None of the provisions specified herein shall be construed to restrict or prohibit, at any time, the prosecution of items of work which will not interfere with the use of existing streets.

Full compensation for all work associated with furnishing, distributing and removal, as required, of all notices; for contacting and coordinating with applicable agencies, schools, etc; and for all incidentals of work required within this "Notification and Scheduling" section shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

### **NOTICE**

Date Delivered:
ar Property Owner:
the interest of minimizing the inconvenience caused by the DOWNTOWN STREETSCAPE PROVEMENTS PROJECT, we are providing you at least 48 hours notice that the following work is possed to be done in the vicinity of your property or affecting access to your property beginning on a.m./p.m. to a.m./p.m.:
Water ImprovementsElectrical
Concrete ImprovementsPaving
Other:
e appreciate your patience and cooperation while this work is underway.
ease call () to contact the Contractor if you have any questions or wish ditional information regarding this work, or contact the City of Grass Valley Engineering Division at 80) 274-4373.
Contractor's Name

#### 10-1.63 RECORD DRAWINGS

The Contractor shall keep accurate records on a set of project prints (24" x 36") of all additions and deletions of the work, and all of the changes in location, elevation, and character of the work not otherwise shown or noted on the contract plans. The City will furnish three (3) sets of full size prints for the "Record Drawings" plans at no cost to the Contractor.

"Record Drawings" construction plans shall be provided to the City after completion of the project. Two (2) copies shall be provided with changes to the original contract work shown in red color. The Contractor shall transmit these "Record Drawings" plans to the Engineer for approval. Details to be shown on the "Record Drawings" plans shall include, but not be limited to, type, quantity, and location of pipe runs, location and elevations of facilities, and any other modifications, additions or adjustments to any other facilities in the project.

"Record Drawings" construction plans shall be signed and dated by the Contractor or the Subcontractor that actually constructed the facility. In addition, company names of the Contractor and Subcontractors shall be added to the title sheet.

The cost of record keeping to provide the information for these "Record Drawings" plans and all work associated with preparing accurate "Record Drawings" construction plans shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

#### 10-1.64 PROJECT EXHIBITS

The contractor shall adhere to the design intent identified in the drawings and specifications provided as the RFQ and RFP project exhibits. These exhibits include details to define the project requirements exactly and/or define the standard of care expected for the project. Adherence to the drawing and specifications provided in the exhibits shall apply as the basis for the design build project until approved otherwise by the City through the design and submittal process. The project exhibits include:

EXHIBIT 1: MILL STREET CONCEPTUAL PLANS

**EXHIBIT 2: MILL STREET RENDERINGS** 

**EXHIBIT 3: MILL STREET PROJECT COMPONENTS** 

EXHIBIT 4: U.S. DEPARTMENT OF THE TREASURY CORONAVIRUS LOCAL FISCAL RECOVERY FUND AWARD TERMS AND CONDITIONS

EXHIBIT 5: CITY OF GRASS VALLEY DESIGN BUILD CONTRACT

**EXHIBIT 6: SPECIAL PROVISIONS** 

EXHIBIT 7: ACKNOWLEDGMENTS AND QUALIFICATIONS FOR DESIGN BUILD SERVICES

EXHIBIT 8: PROPOSAL AND BIDDER'S CERTIFICATES FOR DESIGN BUILD SERVIES

Conflicts between specification requirements identified in the Special Provisions and those presented in the Project Exhibits and Plans shall be resolved in favor of the more stringent requirement. The conceptual plans shall be controlling as to the scope of work and the overall project improvements desired, regardless if matching item of works and sections are found in these Special Provisions.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in finalizing the design intent and enacting the streetscape improvements, complete in place, as shown on the plans, as described in the project exhibits, as specified in the Standard Specifications and these Special Provisions and as directed by the Engineer shall be considered as included in the Contract lump sum prices paid for the various items of work involved and no separate payment will be made.

# EXHIBIT 7 ACKNOWLEDGMENTS AND QUALIFICATIONS FOR DESIGN BUILD CONTRACT



# CITY OF GRASS VALLEY PUBLIC WORKS DEPARTMENT ENGINEERING DIVISION

# ACKNOWLEDGEMENTS AND QUALIFICATIONS

### **FOR**

### **DESIGN-BUILD SERVICES**

DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT PROJECT NO. 21-12

#### **SECTION 1. ACKNOWLEDGEMENTS AND QUALIFICATIONS**

Each Proposer shall fully complete the forms and attachments in accordance with this section, which demonstrates to the City the Proposer's agreement to be bound by the requirements of the RFQ/RFP and demonstrates that the Proposer's technical experience and qualifications are suited to undertake the project.

#### 1.1. PROPOSAL TRANSITTAL LETTER

(To be	typed o	on Proposer's Letterhead)	
Grass 125 Ea	Valley ( ast Mair	/ Manager City Hall I Street, CA 95945	
Re: Do	owntowr	n Streetscape Improvements Project	
	of Grass	for Proposals (RFP) for the Downtown Strees Valley (City) on (date), as amended.	
follov		duly authorized representative of the Propose nnection with the Proposal:	r, I hereby certify, represent, and warrant as
1.	The F	Proposer acknowledges receipt of the RFP an	d the following:
		Addenda No.	Date
2.		submittal of the Proposal has been duly au	
3.	upon All Pi	submittal of the Proposal has been duly au , the Proposer. roject Team Members are identified in this pro	thorized by, and in all respects is binding
	upon All Pr Copie	submittal of the Proposal has been duly au , the Proposer. roject Team Members are identified in this pro es of appropriate California licenses and	thorized by, and in all respects is binding
3.	upon All Pr Copic attac The F into t unde	submittal of the Proposal has been duly au , the Proposer. roject Team Members are identified in this pro	thorized by, and in all respects is binding posal. certificates or registrations are included, prity for assuring that the Proposer will enter Proposer. The Proposer has reviewed and and all Addenda thereto and, if determined

perform its duties in accordance with the terms of the Contract, will be provided

The Payment Bond issued on behalf of

7.

\_\_\_\_ as the Proposer assuring

The	ovided by _ Insurance	required	by t	ne	Contract	will	be	provided	or	brokered by	
									•	rect and comp and statemer	-
	ting the Sel		•		•	•			atioi	rana otatomon	110 111
									raud	or any other a	ction
taker	n in restraint	of free and	l open	com	petition for	the s	ervic	es contemp	olate	d by the RFQ/F	RFP.
Neith	er the Prop	oser nor ar	ny Tear	n M	lember are	curre	ently	suspended	or d	ebarred from d	oing
	ness with an	, ,		•							
									eme	nts of the Prop	osal
	no potential		•					•			
			•		•	•				the award of	
							•	•		ige or conting	ency
	or on any o				•					including wit	hout
	•									roposal will rei	
										Proposer will	
•	•									equired docum	_
	n the time p							<b>3</b> /		•	
The	Proposer h	as visited	the S	te	and becor	ne fa	milia	r with and	is s	satisfied as to	the
										nance for the W	
	-					s to a	ıll La	ws or Regu	ulatio	ons that may a	ffect
	progress ar	•									
					•			•	_	tions, explorati	-
				•				•		for performand	
	itions of the	. ,	ına witi	ıın	the times	and ir	1 acc	ordance w	ith tr	ne other terms	and
			l and c	aref	fully studio	d (or	266111	mae raenar	neihil	ity for having o	done
										ions, tests, stu	
										nd facilities) a	
		_		•					_	the Work or w	
elate	e to any as	pect of the	ne mea	ns,	methods,	techi	nique	s, sequen	ces	and procedure	s of
										means, meth	
										ed by the Con	tract
	employed l							_			
										and observat	
						_				/RFP and Con	
		al examina	tions, II	ive	stigations,	explo	ratior	ns, tests, st	udie	s and data with	1 the
Cont		aivon the	City	rif	ton notice	of	all	oonfliete d	rror	a ambiguition	or
										s, ambiguities n resolution the	
	ity is accept	•		130	Jvered III ti	ie 00	mac	i, and the w	ritte	i resolution the	51601
•	•		•	nt t	o indicate	and o	conve	ev understa	ndin	g of all terms	and
	itions for the										۵.۱۵
		•						•		tween the City	and
	Proposer for	•	•							,	
Nom	0:										
Nam Title:		-									
Addr											
	P66.										

	Phone:Email:	
23.	The key technical and legal representatives avinquiries submitted, and to attend meetings rec	
	Technical Representative:  Name: Address:	
	Phone: Email:	
	Legal Representative: Name: Address: Phone: Email:	
<ul><li>24.</li><li>25.</li></ul>	Addenda thereto and, being familiar with the contemplated by the RFQ/RFP and such Adder supplies, equipment, facilities and services carry out such Work as required by and in Proposal, all for the prices set forth in the Pro In accordance with Section 215 of the Cle implementing EPA regulations, the Propos	ocuments constituting the RFQ/RFP and the e Work and the conditions affecting the Work and offers to furnish all plant, labor, materials, which are necessary, proper or incidental to strict accordance with the RFQ/RFP and the posal Forms.  In Water Act (33 U.S.C 1251 et seq.) and er agrees that preference will be given to sign/Builder, subcontractors, materialmen and
		Name of Proposer
		Name of Designated Signatory
		Signature
		Title

Attachment 1 – California Licenses and Certificates or Registrations

#### 1.2. DESIGN-BUILD TEAM STANDARD QUESTIONNAIRE

General: Design-Build Team's information is to be clearly stated and complete. If the City finds any discrepancies in the information shown on the Qualification Statement or failure to provide necessary information, Proposer may be ruled non-responsive. Overall impression of Proposer's questionnaire is important.

Inf	ormation about the Proposer's G	eneral Contractor			
1.	Name of Company:				
2.	Date of formation or incorporation:				
3.	State of formation or incorporation	ı:			
4. Pro	If the General Contractor is a corpovide information for each office of t			ne corporate stock.	
	Position	Name	Years with Company	% Ownership	
5.	If the General Contractor is a part Provide information for each partn				
	Position	Name	Years with Company	% Ownership	
6.	If the General Contractor is a sole Provide information for each mem				
	Owner		Years of Owne	rship	
				<u> </u>	

7. If the General Contractor is a joint venture, please complete the following table: Provide information for each member of the joint venture with an ownership stake of 20% or more.

Name of Company	Name of Owner, Partner or President	Years with Company	% Ownership of Joint Venture

NOTE: Include inf	Contractor a subsidiary, parent, holding company or affiliate of another construction firm? formation about other firms if one firm owns 50% or more of another or if an owner, of your firm holds a similar position in another firm.
YES	NO
If "yes", explain:	
employees and field	eral Contractor Member require documented safety meetings to be held for construction d supervisors during the course of a project?NO
If "yes", identify hov	v often the meetings are required:
assessed penalties was the prime conti NOTE: If you have	or any Air Quality Management District or Regional Water Quality Control Board cited and against the General Contractor or the owner of a project on which the General Contractor ractor or the Design/Build Entity, in the past five years? If the filed an appeal of a citation and the Appeals Board has not yet ruled on your appeal, art appeal pending, you need not include information about the citation.
YES	NO
If "yes", describe ea	ach citation:

Information about the Engineer of	Record			
11. Name of Company:				
12. Date of formation or incorporation	on:			
13. State of formation or incorporation	on:			
14. If the organization is a corporation Provide information for each office of				e corporate stock
Position	Nam	e	Years with Company	% Ownership
15. If the organization is a partnersh Provide information for each partner			l ble:	
Position	Nam	e	Years with Company	% Ownership
16. If the organization is a sole prop Provide information for each membe			wing table:	
Owner			Years of Owner	ship
				_
17. If the organization is a joint ventor Provide information for each member Joint Venture Member #1	•	•		more.
Name of Company	Name of Owner	, Partner or	Years with	% Ownership
	Presid		Company	of Joint Venture
		_		

#### **Joint Venture Member #2**

Name of Company	Name of Owner, Partner or President	Years with Company	% Ownership of Joint Venture

#### **Joint Venture Member #3**

Name:

Name of Company	Name of Owner, Partner or President	Years with Company	% Ownership of Joint Venture

18. Provide any information on the revocation or suspension of any license, credential, or registration of any Project Team Member's respective owner, officer, partner, or other key personnel.

	Year:	
	Explanation:	
	Name:	
	Year:	
	Explanation:	
	Name:	
	Year:	
	Explanation:	
NO	9. Is the Engineer of Record a subsidiary, parent, holding a IOTE: Include information about other firms if one firm artner, or officer of your firm holds a similar position in	owns 50% or more of another or if an owner,
	YESNO	
If "y	"yes", explain:	

and Health Act of 1970 (P.L. 91-596), settled against any Project Team Member? NOTE: If you have filed an appeal of a citation and the State or Federal Appeals Board has not yet ruled on your appeal, or if there is a court appeal pending, you need not include information about the citation. \_\_\_ YES NO If "yes", describe the citations, including information about the dates of the citations, the nature of the violation, the project on which the citation(s) was or were issued, the amount of penalty paid, if any. If the citation was appealed and a decision has been issued, state the case number and the date of the decision. Project: Date: Amount: Description: Project: Date: Amount: Description: Project: Date: Amount: Description: 21. Provide information concerning any instance in which any proposed Project Team Member (particularly the Engineer of Record or General Contractor), or its owners, officers, or managing employees, defaulted on a construction contract, professional services contract, or design-build contract. Project: Year: Owner: Basis:

20. Has any serious or willful violation of the California Occupational Safety and Health Act of 1973, contained in Part 1 (commencing with Section 6300) of Division 5 of the Labor Code, or the federal Occupational Safety

	Project:
	Year:
	Owner:
	Basis:
	Droingt:
	Project: Year:
	Owner:
	Basis:
	Dasis.
convicted	ny time in the last five years, has any Project Team Member, or any of its owners or officers, been d of a felony, fraud, or a crime involving the awarding of a contract of a government construction project, mance of a government contract? NO
If "yes", e	explain:
23. At ar for bankr	
If "yes", e	explain.
11 yes, e	oxpiair.
	ny time during the last five years, has any Project Team Member, or any of its owners of officers been d, disqualified, or removed from a public project?
YES	
If "yes", e	
ii yes , e	explain.
05.5	
	s the General Contractor have an acceptable safety record as defined in Section 20133(d)(4)(B)(v) of ic Contract Code?
YES	
If "no", ex	
11 110,67	лучин.

26. Is the General Con If "no", explain:	ntractor eligible to bid o	on public work projec	ts?	YES	NO
	e of liquidated damage tcome of any lawsuits y violations and speed	es or fines related to and contract litigatio d and efficiency of co	a municipal on on other propertive action	capital project rojects.	contract.
I, the undersigned, ce questionnaire and kno own knowledge and b matters I believe the California, that the for	ow their contents. The belief, except as to the m to be true. I decl	he matters stated in nose matters stated	the question	onnaire answ tion and belie	ers are true of my ef, and as to those
Signature					
Name					
Title					
Date					

#### 1.3. PROJECT TEAM PROFILE

## 1.3.1. Team Contact Information Name of Design-Build Team: Primary Contact Person: Company: Phone Number: Email: 1.3.2. Legal Corporate Structure Design-Build Entity (corporation, partnership, joint venture, etc.) How many years has lead/majority business been under present name? How many years under former names? (List name and number of years) Have there been any contract terminations for the services your firm performs before fulfillment of the contract within the past three years? YES NO If "yes", list the date, client, and reason for termination: Has any member of the Design-Build Team been assessed any penalties for noncompliance violations of the Federal or State labor laws and/or regulations within the past five (5) years? \_\_\_ YES NO If "yes", provide details including dates: Does any member of the Design-Build Team have any ongoing investigations by any agency regarding violations of the State Labor Code, Business and Professions Code, or State Licensing YES NO If "yes", provide details including dates: 1.3.3. Design Build Team Organization General Contractor License Number **DIR Number**

Major Subcontractors	
Design Firm Name	
Design Subconsultants	

#### 1.3.4. Organizational Chart

Provide an organizational chart illustrating the project team, Key Team Members, and the roles, responsibilities, and reporting structure of the Design-Build Team.

#### 1.4. KEY PROJECT STAFF

<u>NAME</u>	<u>ROLE</u>	OFFICE LOCATION	% OF TIME ALLOCATED TO PROJECT

For each key team member, provide a resume (two single-sided pages maximum) as an attachment. The resume shall include total years of experience in design and/or construction of municipal infrastructure, electrical, and other construction experience, academic qualifications, professional registrations, certifications, employment history and relevant work experience on similar projects.

#### 1.5. EXPERIENCE AND REFERENCE PROJECTS

The Design-Build Team shall attach completed Reference Projects forms (copy as necessary) that provide the experience information for up to five relevant projects similar in scope of work to the DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT.

All projects listed shall be completed within the last 15 years from the date of this RFQ. Information provided must be evidence that members of the design build team have completed, or demonstrated the experience, competency, capability, and capacity to complete projects of similar size, scope, or complexity. Preference is given to projects delivered through Design Build procurement.

The Design-Build team must have self-performed at least 30% of the work on each project listed or self-performed the project as the General Contractor. If the Design-Build Team is a joint venture, each party within the joint-venture must have self-performed at least two of the reference projects as either the General Contractor or Lead Designer/Engineer of Record. If a Joint Venture or prime/sub list each participant's projects separately.

#### REFERENCE PROJECTS

Project I	No
-----------	----

Project Name Owner Name Owner Contact Name Owner Contact Phone & Email Contract Start and End Dates Delivery Method Bid Value (\$) Final Construction Value (\$) Total Change Orders (\$) Value of Self-Performed Work (\$) Key Team Members Involved Name Role  Were Schedule and Budget met?  Summary of Work Performed and Key Challenges	B : (1)		
Owner Contact Name Owner Contact Phone & Email Contract Start and End Dates Delivery Method Bid Value (\$) Final Construction Value (\$) Total Change Orders (\$) Value of Self-Performed Work (\$) Key Team Members Involved Name Role  Were Schedule and Budget met?			
Owner Contact Phone & Email  Contract Start and End Dates  Delivery Method  Bid Value (\$)  Final Construction Value (\$)  Total Change Orders (\$)  Value of Self-Performed Work (\$)  Key Team Members Involved  Name  Role  Were Schedule and Budget met?			
Contract Start and End Dates  Delivery Method  Bid Value (\$)  Final Construction Value (\$)  Total Change Orders (\$)  Value of Self-Performed Work (\$)  Key Team Members Involved  Name  Role  Were Schedule and Budget met?			
Delivery Method Bid Value (\$) Final Construction Value (\$) Total Change Orders (\$) Value of Self-Performed Work (\$) Key Team Members Involved Name Role  Were Schedule and Budget met?			
Bid Value (\$) Final Construction Value (\$)  Total Change Orders (\$)  Value of Self-Performed Work (\$)  Key Team Members Involved  Name  Role  Were Schedule and Budget met?	Contract Start and End Dates		
Final Construction Value (\$)  Total Change Orders (\$)  Value of Self-Performed Work (\$)  Key Team Members Involved  Name  Role  Were Schedule and Budget met?	Delivery Method		
Total Change Orders (\$)  Value of Self-Performed Work (\$)  Key Team Members Involved  Name  Role  Were Schedule and Budget met?	Bid Value (\$)		
Value of Self-Performed Work (\$)  Key Team Members Involved  Name  Role  Were Schedule and Budget met?	Final Construction Value (\$)		
Value of Self-Performed Work (\$)  Key Team Members Involved  Name  Role  Were Schedule and Budget met?	Total Change Orders (\$)		
Key Team Members Involved Name Role  Were Schedule and Budget met?			
Were Schedule and Budget met?		Name	Role
	•		
	Were Schedule and Budget met?		
Summary of Work Performed and Key Challenges	G		
Summary of Work Performed and Key Challenges			
Summary of Work Performed and Key Challenges			
	Summary of Work Performed and I	Key Challenges	

# EXHIBIT 8 PROPOSAL AND BIDDER'S CERTIFICATES FOR DESIGN BUILD SERVICES



# CITY OF GRASS VALLEY PUBLIC WORKS DEPARTMENT ENGINEERING DIVISION

# PROPOSAL AND BIDDER'S CERTIFICATES FOR

## **DESIGN-BUILD SERVICES**

DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT PROJECT NO. 21-12

Design Build Team:		
--------------------	--	--

#### **PROPOSAL**

Proposal to the City of Grass Valley, State of California, in the County of Nevada for the

# DOWNTOWN STREETSCAPE IMPROVEMENTS PROJECT NO. 21-12

NAME OF PROPOSER	
BUSINESS P.O. BOX	
BUSINESS STREET ADDRESS	(Required, even if P.O. Box is used)
CITY, STATE, ZIP	
TELEPHONE NUMBER ( )	
FAX NUMBER ( )	
EMAIL	
CONTRACTOR'S DIR NUMBER	

The project to be done and referred to herein is in City of Grass Valley, State of California, located at The wastewater treatment plant in the City of Grass Valley, and is to be constructed in accordance with the Department of Transportation Standard Plans, dated 2018, the Standard Specifications, dated 2018, the Labor Surcharge and Equipment Rental Rates in effect on the date the work is accomplished, and the General Prevailing Wage Rates.

The project plans and specifications for the work to be done were approved to be completed in a design build format and are collectively entitled:

# CITY OF GRASS VALLEY DOWNTOWN STREETSCAPE IMPROVEMENTS

PROJECT NO. 21-12

The individual project components for the Downtown Streetscape Improvements Project are developed to the conceptual or approximately 30% design level are presented in the RFQ/RFP in the exhibits.

Proposals are to be submitted for the entire work. The amount of the bid for comparison purposes will be the total of all items 1, 2, and 3, forming the base cost. The bid alternative may or may not be included with the final project awarded, depending on funds.

The bidder shall set forth for each item of work a lump sum value, all in clearly legible figures in the respective spaces provided for this purpose. The main price form below is set up for three (3) lump sum quantities, one for Mill Street Streetscape improvement work, one for Main Street Improvements and one for component water line replacement work. These total of these three items will constitute the total base price. A fourth item for the Main/Mill Streets Intersection Improvements that may be added to the project if funds allow, will not be considered part of the base price.

A detailed schedule of values for the project, in keeping with the project exhibits is also required. This schedule should include quantities and unit costs.

In case of discrepancy between the item price and the total set forth for a unit basis item, the item price shall prevail, provided, however, if the amount set forth as an item price is ambiguous, unintelligible or uncertain for any cause, or is omitted, or is the same amount as the entry in the "Total" column, then the amount set forth in the "Total" column for the item shall prevail and shall be divided by the estimated quantity for the item and the price thus obtained shall be the item price.

If this proposal shall be accepted and the undersigned shall fail to enter into the Contract and furnish the two bonds in the sums required by the State Contract Act, with surety satisfactory to the City of Grass Valley, within 8 days, not including Sundays and legal holidays, after the bidder has received notice from the City of Grass Valley that the Contract has been awarded, the City of Grass Valley may, at its option, determine that the bidder has abandoned the Contract, and thereupon this proposal and the acceptance thereof shall be null and void and the forfeiture of such security accompanying this proposal shall operate and same shall be the property of the City of Grass Valley.

The undersigned, as bidder, declares that the only persons or parties interested in this proposal as principals are those named herein; that this proposal is made without collusion with any other person, firm, or corporation; that he has carefully examined the location of the proposed work, the annexed proposed form of contract, and the plans therein referred to; and he proposes, and agrees if this proposal is accepted, that he will contract with the City of Grass Valley in the form of the copy of the contract annexed hereto, to provide all necessary machinery, tools, apparatus and other means of construction, and to do all the work and furnish all the materials specified in the contract, in the manner and time therein prescribed, and according to the requirements of the Engineer as therein set forth, and that he will take in full payment therefor the following prices, to wit:

#### **BID ITEMS**

BID ITEM	DESCRIPTION	TOTAL COST
1	STREETSCAPE IMPROVEMENTS (MILL STREET)	
2	STREETSCAPE IMPROVEMENTS (MAIN STREET)	
3	MILL STREET WATER LINE REPLACEMENT	

<b>TOTAL COST (ITEMS 1</b>	, 2,	AND 3)	): \$
----------------------------	------	--------	-------

#### **ADDITIVE BID ITEM**

BID ITEM	DESCRIPTION	TOTAL COST
А	STREETSCAPE IMPROVEMENTS (WEST MAIN STREET / MILL STREET INTERSECTION)	

- (1) Costs are to be all inclusive, including engineering, materials, labor, shipping, tax, etc.
- (2) A detailed schedule of values per the project exhibits is also required with quantities, unit prices and total values matching the above total costs.

#### LIST OF SUBCONTRACTORS

The Bidder shall list the name, address, California contractor's license number, Public Works contractor registration number of each Subcontractor required to be listed by "Subcontractor List" of the Standard Specifications, and the Special Provisions, and designate the portion and percentage of the work to be performed by the Subcontractor, to whom the bidder proposes to subcontract portions of the work. *The California contractor license classification and number shall be included for all subcontractors doing work in excess of one half of one percent of the total Project bid price, or ten thousand dollars (\$10,000.00), whichever is greater.* 

Subcontractor Name, Location of Business	CA License Number	Public Works Contractor Registration Number	Bid Item Number, Percentage of Item Work Subcontracted *

<sup>\*</sup> Bid Item Number and Percentage of Item Work Subcontracted may be submitted by the proposer within 24 hours of the bid opening date and time.

The city recognizes that it may be impractical for the design-build entity to list all subcontractors at the time of the award because the design-build contract will be awarded prior to the completion of the design. Therefore, the following requirements will apply to subcontractors, licensed by the state, that are employed on the project:

- Proposers shall specify the construction trades or types of subcontractors that may be named as members of the design-build entity at the time of award. In selecting the trades that may be identified as members of the design-build entity, the design-build entity shall identify the trades deemed essential in the design considerations of the project.
- All subcontracts not listed by the design-build entity at the time of award shall be performed and awarded by the design-build entity in accordance with a bidding process set forth in the design-build agreement.

In a contract between the successful Proposer and a subcontractor, and in a contract and any subcontractor thereunder, the percentage of the retention proceeds withheld may not exceed the percentage specified in the contract between the city and the design-build entity. If the design-build entity provides written notice to any subcontractor who is not a member of the design-build entity, prior to or at the time that the bid is requested, that a bond may be required and the subcontractor subsequently is unable or refuses to furnish a bond to the design-build entity, then the design build entity may withhold retention proceeds in excess of the percentage specified in the contract between the city and the design-build entity from any payment made by the design-build entity to the subcontractor.

#### LIST OF PROPOSED SUBSTITUTIONS

Pursuant to Public Contract Code Section 3400, the following substitutions are proposed as "Equals" for those set forth in the Contract. All data substantiating the proposed substitutions shall be submitted to the City upon request.

Contract	Name of Product	Name and Manufacturer	Model/Quantity of
Section	to be Substituted	of Proposed Product To	Proposed Product
	Out	Be Substituted	-

#### **EQUAL EMPLOYMENT OPPORTUNITY CERTIFICATION**

The bidder hereby declares under penalty of perjury that the bidder has \_\_\_\_\_, has not \_\_\_\_\_\_, participated in a previous contract or subcontract subject to the equal opportunity clauses, as required by Executive Orders 10925, 11114, or 11246, and that, where required, he has filed with the Joint Reporting Committee, the Director of the Office of Federal Contract Compliance, a Federal Government contracting or administering agency, or the former President's Committee on Equal Employment Opportunity, all reports due under the applicable filling requirements.

Additionally, the bidder hereby declares that all proposed subcontractors listed on the bidder's completed List of Subcontractors as performing work under this contract, have stated in their bid to the prime contractor or in writing at the outset of negotiations, whether the proposed subcontractor has participated in a previous contract or subcontract subject to the equal opportunity clauses, as required by Executive Orders 10925, 11114, or 11246, and that, where required, he has filed with the Joint Reporting Committee, the Director of the Office of Federal Contract Compliance, a Federal Government contracting or administering agency, or the former President's Committee on Equal Employment Opportunity, all reports due under the applicable filling requirements.

**Note:** The above certification is required by the Equal Employment Opportunity Regulations of the Secretary of Labor (41 CFR 60-1.7(b) (1)), and must be submitted by bidders and proposed subcontractors only in connection with contracts and subcontracts which are subject to the equal opportunity clause. Contracts and subcontracts which are exempt from the equal opportunity clause are set forth in 41 CFR 60-1.5. (Generally only contracts or subcontracts of \$10,000 or under are exempt.)

Currently, Standard Form 100 (EEO-1) is the only report required by the Executive Orders or their implementing regulations.

Proposed prime contractors and subcontractors who have participated in a previous contract or subcontract subject to the Executive Orders and have not filed the required reports should note that 41 CFR 60-1.7(b) (1) prevents the award of contracts and subcontracts unless such contractor submits a report covering the delinquent period or such other period specified by the Federal Highway Administration or by the Director, Office of Federal Contract Compliance, U.S. Department of Labor.

The bidder must place a checkmark after "has" or "has not" in one of the blank spaces provided. The above Certifications are part of this Proposal. Signing this Proposal on the signature portion thereof shall also constitute an endorsement and execution of these certifications. Bidders are cautioned that making a false certification may subject the certifier to criminal prosecution.

#### PUBLIC CONTRACT CODE SECTION 10285.1 STATEMENT

In accordance with Public Contract Code Section 10285.1 (Chapter 376, Stats. 1985), the bidder
hereby declares under penalty of perjury under the laws of the State of California that the bidder
has, has not, been convicted within the preceding three years of any offenses
referred to in that section, including any charge of fraud, bribery, collusion, conspiracy, or any
other act in violation of any state or Federal antitrust law in connection with the bidding upon,
award of, or performance of, any public works Contract, as defined in Public Contract Code
Section 1101, with any public entity, as defined in Public Contract Code Section 1100, including
the Regents of the University of California or the Trustees of the California State University of
California or the Trustees of the California State University. The term "bidder" is understood to
include any partner, member, officer, director, responsible managing officer, or responsible
managing employee thereof, as referred to in Section 10285.1.

#### **PUBLIC CONTRACT CODE SECTION 10162 QUESTIONNAIRE**

In accordance with Public Contract Code Section 10162, the Bidder shall complete, under penalty of perjury, the following questionnaire:

Has the bidder, any officer of the bidder, or any employee of the bidder who has a proprietary interest in the bidder, ever been disqualified, removed, or otherwise prevented from bidding on, or completing a Federal, State, or local government project because of a violation of law or a safety regulation?

Yes	No
-----	----

If the answer is yes, explain the circumstances in the following space.

#### PUBLIC CONTRACT SECTION 10232 STATEMENT

In accordance with Public Contract Code Section 10232, the Contractor, hereby states under penalty of perjury, that no more than one final unappealable finding of contempt of court by a federal court has been issued against the Contractor within the immediately preceding two year period because of the Contractor's failure to comply with an order of a federal court which orders the Contractor to comply with an order of the National Labor Relations Board.

The bidder must place a checkmark after "has" or "has not" and "yes" or "no" in one of the blank spaces provided. The above Statements and Questionnaire are part of the Proposal. Signing this Proposal on the signature portion thereof shall also constitute signature of these Statements. Bidders are cautioned that making a false certification may subject the certifier to criminal prosecution.

#### **NON-COLLUSION AFFIDAVIT**

(Title 23 United States Code Section 112 and Public Contract Code Section 7106)

In conformance with Title 23 United States Code Section 112 and Public Contract Code 7106 the bidder declares that the bid is not made in the interest of, or on behalf of, any undisclosed person, partnership, company, association, organization, or corporation; that the bid is genuine and not collusive or sham; that the bidder has not directly or indirectly induced or solicited any other bidder to put in a false or sham bid, and has not directly or indirectly colluded, conspired, connived, or agreed with any bidder or anyone else to put in a sham bid, or that anyone shall refrain from bidding; that the bidder has not in any manner, directly or indirectly, sought by agreement, communication, or conference with anyone to fix the bid price of the bidder or any other bidder, or to fix any overhead, profit, or cost element of the bid price, or of that of any other bidder, or to secure any advantage against the public body awarding the contract of anyone interested in the proposed contract; that all statements contained in the bid are true; and, further, that the bidder has not, directly or indirectly, submitted his or her bid price or any breakdown thereof, or the contents thereof, or divulged information or data relative thereto, or paid, and will not pay, any fee to any corporation, partnership, company association, organization, bid depository, or to any member or agent thereof to effectuate a collusive or sham bid.

The above Non-collusion Affidavit is part of the Proposal. Signing this Proposal on the signature portion thereof shall also constitute signature of this Noncollusion Affidavit. Bidders are cautioned that making a false certification may subject the certifier to criminal prosecution.

#### **DEBARMENT AND SUSPENSION CERTIFICATION**

(Title 49, Code of Federal Regulations, Part 29)

The bidder, under penalty of perjury, certifies that, except as noted below, he/she or any other person associated therewith in the capacity of owner, partner, director, officer, manager:

- is not currently under suspension, debarment, voluntary exclusion, or determination of ineligibility by any Federal agency;
- has not been suspended, debarred, voluntarily excluded or determined ineligible by any Federal agency within the past 3 years;
- · does not have a proposed debarment pending; and
- has not been indicted, convicted, or had a civil judgment rendered against it by a court of competent jurisdiction in any matter involving fraud or official misconduct within the past 3 years.

3 years.
If there are any exceptions to this certification, insert the exceptions in the following space.
Exceptions will not necessarily result in denial of award, but will be considered in determining bidder responsibility. For any exception noted above, indicate below to whom it applies, initiating agency, and dates of action.
The above Certification is part of the Proposal. Signing this Proposal on the signature portion thereof shall also constitute signature of this Certification. Bidders are cautioned that making a false certification may subject the certifier to criminal prosecution.

# NONLOBBYING CERTIFICATION FOR FEDERAL-AID CONTRACTS

The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

- (I) No federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any federal contract, the making of any federal grant, the making of any federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any federal contract, grant, loan, or cooperative agreement.
- (2) If any funds other than federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure of Lobbying Activities," in accordance with its instructions.

This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by Section 1352, Title 31, U.S. Code. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

The prospective participant also agrees by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such sub recipients shall certify and disclose accordingly.

**DISCLOSURE OF LOBBYING ACTIVITIES**COMPLETE THIS FORM TO DISCLOSE LOBBYING ACTIVITIES PURSUANT TO 31 U.S.C. 1352

1.	Type of Federal Action: 2. Status of Federal Action	deral Action: 3. Report Type:			
4.	a. contract b. grant c. cooperative agreement d. loan e. loan guarantee f. loan insurance  Name and Address of Reporting Entity  Prime  Subawardee  Tier, if known	rd b. material change			
6.	Congressional District, if known Federal Department/Agency:	Congressional District, if known 7. Federal Program Name/Description:  CFDA Number, if applicable			
8.	Federal Action Number, if known:	9. Award Amount, if known:			
10.	a. Name and Address of Lobby Entity (If individual, last name, first name, MI)  (attach Continuation S	b. Individuals Performing Services (including address if different from No. 10a) (last name, first name, MI)  Sheet(s) if necessary)			
11.	Amount of Payment (check all that apply)	13. Type of Payment (check all that apply)			
12. 14.	Form of Payment (check all that apply):  a. cash b. in-kind; specify: nature value  Brief Description of Services Performed or to be per officer(s), employee(s), or member(s) contacted, for leading to the performed or to be per officer(s).				
	(attach Continuation Sheet(s) if necessary)				
15.	Continuation Sheet(s) attached: Yes	No			
16. Information requested through this form is authorized by Title 31 U.S.C. Section 1352. This disclosure of lobbying reliance was placed by the tier above when his transaction was made or entered into. This disclosure is required pursuant to 31 U.S.C. 1352. This information will be reported to Congress semiannually and will be available for public inspection. Any person who fails to file the required disclosure shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.		Signature: Print Name: Title:			
		Telephone No.: Date:			
Federal Use Only:		Authorized for Local Reproduction Standard Form - LLL			

## INSTRUCTIONS FOR COMPLETION OF SF-LLL, DISCLOSURE OF LOBBYING ACTIVITIES

This disclosure form shall be completed by the reporting entity, whether subawardee or prime federal recipient, at the initiation or receipt of covered federal action or a material change to previous filing pursuant to title 31 U.S.C. Section 1352. The filing of a form is required for such payment or agreement to make payment to lobbying entity for influencing or attempting to influence an officer or employee of any agency, a Member of Congress an officer or employee of Congress or an employee of a Member of Congress in connection with a covered federal action. Attach a continuation sheet for additional information if the space on the form is inadequate. Complete all items that apply for both the initial filing and material change report. Refer to the implementing guidance published by the Office of Management and Budget for additional information.

- 1. Identify the type of covered federal action for which lobbying activity is and/or has been secured to influence, the outcome of a covered federal action.
- 2. Identify the status of the covered federal action.
- 3. Identify the appropriate classification of this report. If this is a follow-up report caused by a material change to the information previously reported, enter the year and quarter in which the change occurred. Enter the date of the last, previously submitted report by this reporting entity for this covered federal action.
- 4. Enter the full name, address, city, State and zip code of the reporting entity. Include Congressional District if known. Check the appropriate classification of the reporting entity that designates if it is or expects to be a prime or subaward recipient. Identify the tier of the subawardee, e.g., the first subawardee of the prime is the first tier. Subawards include but are not limited to subcontracts, subgrants and contract awards under grants.
- 5. If the organization filing the report in Item 4 checks "Subawardee" then enter the full name, address, city, State and zip code of the prime federal recipient. Include Congressional District, if known.
- 6. Enter the name of the federal agency making the award or loan commitment. Include at least one organization level below agency name, if known. For example, Department of Transportation, United States Coast Guard.
- 7. Enter the federal program name or description for the covered federal action (item 1). If known, enter the full Catalog of Federal Domestic Assistance (CFDA) number for grants, cooperative agreements, loans and loan commitments.
- 8. Enter the most appropriate federal identifying number available for the federal action identification in item 1 (e.g., Request for Proposal (RFP) number, Invitation for Bid (IFB) number, grant announcement number, the contract grant. or loan award number, the application/proposal control number assigned by the federal agency). Include prefixes, e.g., "RFP-DE-90-001."
- 9. For a covered federal action where there has been an award or loan commitment by the Federal agency, enter the federal amount of the award/loan commitments for the prime entity identified in item 4 or 5.
- 10. (a) Enter the full name, address, city, State and zip code of the lobbying entity engaged by the reporting entity identified in item 4 to influenced the covered federal action.
  - (b) Enter the full names of the individual(s) performing services and include full address if different from 10 (a). Enter Last Name, First Name and Middle Initial (Ml).
- 11. Enter the amount of compensation paid or reasonably expected to be paid by the reporting entity (item 4) to the lobbying entity (item 10). Indicate whether the payment has been made (actual) or will be made (planned). Check all boxes that apply. If this is a material change report, enter the cumulative amount of payment made or planned to be made.
- 12. Check the appropriate box(es). Check all boxes that apply. If payment is made through an in-kind contribution, specify the nature and value of the in-kind payment.
- 13. Check the appropriate box(es). Check all boxes that apply. If other, specify nature.
- 14. Provide a specific and detailed description of the services that the lobbyist has performed or will be expected to perform and the date(s) of any services rendered. Include all preparatory and related activity not just time spent in actual contact with federal officials. Identify the federal officer(s) or employee(s) contacted or the officer(s) employee(s) or Member(s) of Congress that were contacted.
- 15. Check whether or not a continuation sheet(s) is attached.
- 16. The certifying official shall sign and date the form, print his/her name title and telephone number.

Public reporting burden for this collection of information is estimated to average 30 minutes per response, including time for reviewing instruction, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding the burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to the Office of Management and Budget, Paperwork Reduction Project (0348-0046), Washington, D.C. 20503. SF-LLL-Instructions Rev. 06-04-90«ENDIF»

Accompanying this proposal	is			
	(Insert the words "Cash(\$_ "Certified Check", or "Bidde	)", Cashier's Check", r's Bond", as the case may be)		
in an amount equal to at leas	st ten percent of the total of t	he bid.		
The names of all persons into	erested in the foregoing prop	oosal as principals are as follows:		
<b>IMPORTANT NOTICE:</b> If bidder or other interested person is a corporation, state legal name of corporation, also names of the president, secretary, treasurer, and manager thereof; if a copartnership, state true name of firm, also names of all individual copartners composing firm; if bidder or other interested person is an individual, state first and last names in full.				
Licensed in conformance wit	h an act providing for the re-	rintration of Contractors		
License No.	Classification(s)_			
ADDENDA - This Proposal is addenda number/s	•	he changes to the Contract included in		
	n addenda numbers if addenda have l osal any Bid Item sheets that were red			
All Addenda must be signed to be considered responsive		idder's Proposal in order for the Bid		
California, that the foregoing 10162, 10232 and 10285.1 requirements of Section 810 (Chapter 5, Title 2 of the Ca further certify, under penalty States of America, that the	g questionnaire and statemed are true and correct and to 3 of the Fair Employment a alifornia Administrative Code of perjury under the laws of Noncollusion Affidavit requent contract Code Section 7106	of perjury under the laws of the State of ents of Public Contract Code Sections that the bidder has complied with the and Housing Commission Regulations e). By my signature on this proposal I the State of California and the United fired by Title 23 United States Code, e; and the Title 49 Code of Federal eation are true and correct.		
Sign				
Here				
	Signature & Title of Bidder	Date		
Business Address:		<del></del>		
Place of Business:				

#### BIDDER'S BOND CITY OF GRASS VALLEY

KNOW ALL PEOPLE BY THESE PRESENTS, th						
PRINCIPAL, and	as SURETY, are					
held and firm bound unto the City of Grass Valley, he						
of TEN PERCENT (10%) OF THE TOTAL AMOUNT OF THE BID of the Principal above named,						
submitted by said Principal to the CITY for the work						
sum in lawful money of the United States, well and						
heirs, executors, administrators and successors, join						
In no case shall the liability of the sure Dollars	(\$).					
THE CONDITION OF THIS OBLIG	ATION IS SUCH, THAT:					
WHEREAS, the Principal has submitted the above-	nentioned bid to the City of Grass Valley,					
for certain construction specifically described as follow	vs for which bids are to be opened at Grass					
Valley, California on February 8, 2022 at 3:30 p.m						
IMPROVEMENTS PROJECT, PROJECT NO. 21-12	•					
NOW THEREFORE, if the aforesaid Principal is awar	ded this Contract, and, within the time and					
manner required under the specifications, after the						
signature, enters into a written Contract, in the presc						
files the two bonds with the City, one to guarante						
guarantee payment for labor and materials, as requir						
and void; otherwise it shall be and remain in full force	and virtue.					
In the event suit is brought upon this bond by the Obli	gee and judgment is recovered, the Surety					
shall pay all costs incurred by the Obligee in such su						
be fixed by the Court.	,					
•						
IN WITNESS WHEREOF, we have hereunto set of	ur hands and seals on this day of					
, A.D., 20						
(SEAL)	(SEAL)					
(0=41)	(0511)					
(SEAL)	(SEAL)					
(SEAL)	(SEAL)					
SURETY	PRINCIPAL					
ADDRESS:						
NOTE: Signatures of those executing for the surety	must be properly acknowledged					
<b>NOTE:</b> Signatures of those executing for the surety must be properly acknowledged.						